## Declaration of Conformity We, Manufacturer

#### ZIPPY TECHNOLOGY CORP. 10F, No.50, MIN CHYUAN RD. XINDIAN DIST., NEW TAIPEI CITY TAIWAN, R.O.C.

declare that the product (description of the apparatus, system, installation to which it refers)

# SWITCHING POWER SUPPLY MPSM-5500V

is in conformity with (reference to the specification under which conformity is declared) in accordance with 2004/108/EC-EMC Directive

- ■EN 55011 : 2009+A1:2010 Class B Industrial, scientific and medical radio-frequency equipment
  - -Radio disturbance characteristics
  - -Limits and methods of measurement
- EN 60601-1-2: 2007
  - Medical electrical equipment
  - -Immunity characteristics
  - -Limits and methods of measurement
- ■EN 61000-4-2 : 2009 Criteria A Electrostatic discharge requirements "ESD"
- ■EN 61000-4-3: 2006+A1:2008+A2:2010 Criteria A Radiated, radio frequency electromagnetic field
- EN 61000-4-4: 2012 Criteria A Electrical fast transient requirements "EFT"

- ■EN 61000-4-5: 2006 Criteria A Surge Immunity requirements
- ■EN 61000-4-6: 2009 Criteria A Conducted Immunity
- ■EN 61000-4-8: 2010 Criteria A Power Frequency Magnetic Field Immunity
- Dip Criteria B
  Interruptions Criteria C
  Voltage Dip,interruptions
  Immunity requirements
- ■EN 61000-3-2: 2006+A1:2009+A2:2009 Harmonic current requirements
- EN 61000-3-3: 2008 Voltage fluctuations and flicker requirements

Checked by:	Karen	, Date :	SEP,17,2014	
	(Karen Ma / Engineer)			
Approved by : _	Jeff Huan J (Jeff Huang / Director)	, Date :	SEP,17,2014	

# APPLICATION FOR CERTIFICATION ON Behalf Of ZIPPY TECHNOLOGY CORP. SWITCHING POWER SUPPLY

Model#: **MPSM-5500V** 

FCCID:N/A

#### PREPARED FOR:

ZIPPY TECHNOLOGY CORP. 10F., No.50, MINQUAN RD., XINDIAN DIST., NEW TAIPEI CITY TAIWAN, R.O.C

#### REPORT BY:

ZIPPY TECHNOLOGY CORP. 10F., No.50, MINQUAN RD., XINDIAN DIST., NEW TAIPEI CITY TAIWAN, R.O.C

> TEL: (02)2918-8512 FAX: (02)2913-4969

## TABLE OF CONTENTS

Description	Page
1. Test Report Certification	5
2. General Information	6
2.1 Production Description	6
2.2 Tested System Details	7
2.2.1 Resistor Load	7
2.3 Test Methodology	7
2.4 Test Facility	7
3. Electronic-Magnetic Interference Test	8
3.1. Conducted Power Line Test.	8
3.1.1 Test Equipments	8
3.1.2 Block Diagram of Test Setup.	8
3.1.3 Conducted Powerline Emission Limit	9
3.1.4 EUT Configuration on Measurement	9
3.1.5 EUT Exercise Software	9
3.1.6 Conducted Emission Data	9
3.2. Radiation Emission Test	15
3.2.1 Test Equipment	. 15
3.2.2 Test Setup	15
3.2.3 Radiated Emission Limited	16
3.2.4 EUT Configuration	. 17
3.2.5 Operating Condition of EUT	17
3.2.6 Radiated Emission Data	17
3.2.7 Test Photo and Setup	. 21
4. ESD Measurement	22
4.1 Test Equipments	22
4.2 Test Setup.	22
4.2.1 Block Diagram of Connections between EUT and simulators	22
4.2.2 Test Setup of EUT.	22
4.3 Severity Levels	23
4.4 EUT Operating Condition	23
4.5 Test Procedure	23
4.6 Test Method.	23
17 Test Result	24

## TABLE OF CONTENTS

Description	Page
5. Radiated Susceptibility Measurement	25
5.1 Test Equipment	25
5.2 Block Diagram of Test Setup.	25
5.3 Severity Levels	26
5.4 EUT Operating Condition	26
5.5 Test procedure	26
5.6 Test Method.	26
5.7 Test Result	27
6.Electrical Fast Transient/Burst Measurement	28
6.1 Test Equipment	28
6.2 Block Diagram of Test Setup.	28
6.3 Severity Levels	28
6.4 EUT Operating Condition	29
6.5 Test procedure	29
6.6 Test Method	29
6.7 Test Result.	30
7. Harmonic Current Requirements	31
8. Voltage Fluctuation and Filcker Test	33
9. Surge Immunity Test	
10. Conducted Immunity Test	
11. Voltage Dip,interruptions Immunity Test	36
12. Power Frequency Magnetic Field (PFM) Immunity Test	37
12. Photographs	38
13. EMI Reduction method during compliance Testing	42
Appendix A Circuit diagram, block diagram, User Manual	
Appendix B Doc	

## 1. Test Report Certification

Applicant : ZIPPY TECHNOLOGY CORP.

Manufacturer : ZIPPY TECHNOLOGY CORP.

EUT Description : Switching Power Supply

(A) FCC ID : N/A

(B) Model No. : **MPSM-5500V** 

(C) Serial No. : N/A

(D) Power Supply : 115Vac/60Hz,230Vac/50Hz

#### MEASUREMENT PROCEDURE USED:

EN 55024 RULES EN 55022 RULES

THE DEVICE DESCRIBED ABOVE WAS TESTED BY ZIPPY SHIN JIUH CORP. TO DETERMINE THE SEVERITY LEVELS THE DEVICE CAN ENDURE AND ITS PERFORMANCE CRITERION.

THE MEASUREMENT RESULTS ARE CONTAINED IN THIS TEST REPORT AND ZIPPY SHIN JIUH CORP. IS ASSUMED FULL RESPONSIBILITY FOR THE ACCURACY AND COMPLETENESS OF THESE MEASUREMENT. ALSO, THIS REPORT SHOWS THAT THE EUT TO BE TECHNICALLY COMPLIANT WITH THE EN STANDARD.

## 2. General Information

## 2.1 Production Description

Description : Switching Power Supply

Model Number : MPSM-5500V

Applicant : ZIPPY TECHNOLOGY CORP.

Address : 10F., No.50, MINQUAN RD., XINDIAN DIST.,

NEW TAIPEI CITY TAIWAN, R.O.C

FCC ID : N/A

Data Cable : N/A

PowerCord : Non-Shielded, detachable, 1.5m

#### 2.2 Tested System Details

The FCC IDs for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

#### 2.2.1 Resistor Load

Model Number : ELECTRONIC LOAD

Serial Number : N/A

FCC ID : N/A

Manufacturer : ZIPPY

Power : 500W

#### 2.3 Test Methodology

#### EMI Test:

Both conducted and radiated testing were performed according to the procedures in EN 55022 Radiated testing was performed at an antenna to EUT distance of 10 meters.

#### EMS Test:

Performed according to procedures in EN 61000 series regulations.

## 2.4 Test Facility

ZIPPY TECHNOLOGY CORP. 10F., No.50, MINQUAN RD., XINDIAN DIST., NEW TAIPEI CITY TAIWAN, R.O.C

## 3. Electronic-Magnetic Interference Test


#### 3.1 Conducted Power Line Test

#### 3.1.1 TEST Equipment's

The following test equipment's are used during the conducted power line tests:

Item	Instrument	Manufacture	Type No:	Last Calibration
1	TEST RECEIVER	ROHDE & SCHWARZ	ESHS10	Mar.,2014
2	LISN	ROHDE & SCHWARZ	ENV4200	Jan.,2014
3	SHIELDE	N/A		

## 3.1.2 Block Diagram of Test Setup

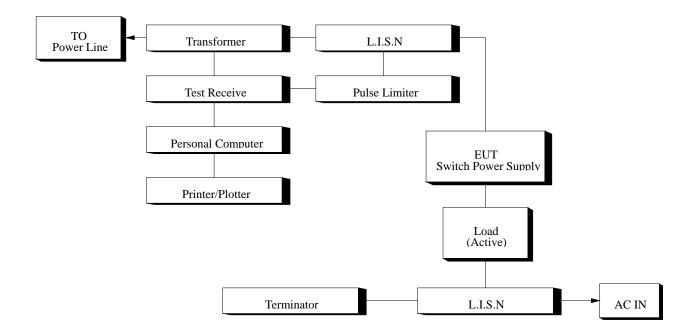

#### 3.1.3 Conducted Powerline Emission Limit

Maximum RF Line Voltage dB(uV)						
Frequency	Class B					
MHz	QUASI-PEAK	AVERAGE				
0.15 - 0.50	66-56	66-56				
0.50 - 5.0	56	56				
5.0 - 30	60	60				

Remarks: In the Above Table, the tighter limit applies at the band edges.

#### 3.1.4 EUT Configuration on Measurement

The equipment's which is listed 3.2 are installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.1.5 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 3.1.5.1 Setup the EUT and simulators as shown on 3.2.
- 3.1.5.2 Turn on the power of all equipment's.

#### 3.1.6 Conducted Emission Data

The measurement range of conducted emission which is from 0.15 MHz to 30 MHz was investigated. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

MODEL: MPSM-5500V	REPORT NO.: 14091702
-------------------	----------------------

## Conducted Emission Data

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : **MPSM-5500V** HUMIDITY : <u>65</u>%

Frequency	Reading L	Limites	
MHz	Line 1	Line 2	DBuV
0.20	45.67	48.65	63.61

Remark: All readings are Quasi-Peak values.

#### conduction test

EUT: MPSM-5500V SPS
Manuf: ZIPPY TECH CO..LTD

Op Cond: FULL LOAD

Operator:

Test Spec: EN 55011-- Class B

Comment: Load Condition (26 19 0.8 20 3.5)


L220V

Scan Settings	(3	Ranges)							
	Freq	uencies ——				Receiver Se	ettings —		
Start	Stop	0	Step	i IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500	kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MI	Нz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30M	1Hz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
Transducer	No.	Start	Stop		Name				
	1	9kHz		30MHz	CEB				

Prescan Measurement: Detectors: X QP / + AV

Meas Time: see scan settings

Peaks: 8
Acc Margin: 25 dB

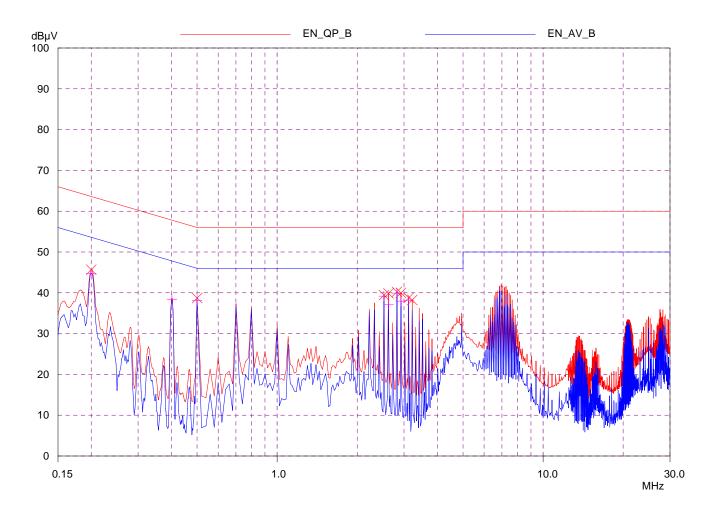

#### conduction test

EUT: MPSM-5500V SPS
Manuf: ZIPPY TECH CO..LTD

Op Cond: FULL LOAD

Operator:

Test Spec: EN 55011-- Class B

Comment: Load Condition (26 19 0.8 20 3.5)

L220V

Scan Settings	(3 Ranges)							
Frequencies ———			¬ [		———— Receiver Settings —			
Start	Stop	Step	i IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
-			-					
		•						

Transducer No. Start Stop Name
1 9kHz 30MHz CEB

Prescan Measurement: Detectors: X QP / + AV

Meas Time: see scan settings

Peaks: 8 Acc Margin: 25 dB

#### Peak Search Results

_						
Frequency	QP Level	QP Limit	QP Delta	Phase	PE	
MHz	dΒμV	dΒμV	dB	-	-	
0.2	45.67	63.61	17.94	N	gnd	
0.5	38.71	56.00	17.29	N	gnd	
2.52	39.43	56.00	16.57	N	gnd	
2.62	39.86	56.00	16.14	N	gnd	
2.82	40.25	56.00	15.75	N	gnd	
2.92	39.99	56.00	16.01	N	gnd	
3.12	38.75	56.00	17.25	N	gnd	
3.22	38.25	56.00	17.75	N	gnd	
Frequency	AV Level	AV Limit	AV Delta	Phase	PE	
Frequency MHz	AV Level dΒμV	AV Limit dBµV	AV Delta dB	Phase	PE -	
MHz	dΒμV	dΒμV	dB	-	-	
MHz 0.2	dΒμV 44.77	dΒμV 53.61	dB 8.84	- N	- gnd	
MHz 0.2 0.402	dBμV 44.77 38.39	dBμV 53.61 47.81	dB 8.84 9.42	- N N	- gnd gnd	
MHz 0.2 0.402 0.5	dBμV 44.77 38.39 38.12	dBμV 53.61 47.81 46.00	dB 8.84 9.42 7.88	- N N	gnd gnd gnd	
MHz 0.2 0.402 0.5 2.52	dBμV 44.77 38.39 38.12 39.19	dBμV 53.61 47.81 46.00 46.00	dB 8.84 9.42 7.88 6.81	- N N N	gnd gnd gnd gnd gnd	
MHz 0.2 0.402 0.5 2.52 2.62	dBμV 44.77 38.39 38.12 39.19 37.07	dBµV 53.61 47.81 46.00 46.00 46.00	dB 8.84 9.42 7.88 6.81 8.93	- N N N N	gnd gnd gnd gnd gnd gnd	
MHz  0.2  0.402  0.5  2.52  2.62  2.82	dBμV 44.77 38.39 38.12 39.19 37.07 39.92	dBµV 53.61 47.81 46.00 46.00 46.00	dB 8.84 9.42 7.88 6.81 8.93 6.08	N N N N N	gnd gnd gnd gnd gnd gnd	

<sup>\*</sup> limit exceeded

#### conduction test

EUT: MPSM-5500V SPS
Manuf: ZIPPY TECH CO..LTD

Op Cond: FULL LOAD

Operator:

Test Spec: EN 55011-- Class B

Comment: Load Condition (26 19 0.8 20 3.5)


N220V

Scan Settings	(3	Ranges)							
	Freq	uencies ——				- Receiver Se	ttings —		
Start	Stop	)	Step	' IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500	kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MH	Ηz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30M	1Hz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
Transducer	No.	Start	Stop	)	Name				
	1	9kHz		30MHz	CEB				

Prescan Measurement: Detectors: X QP / + AV

Meas Time: see scan settings

Peaks: 8
Acc Margin: 25 dB

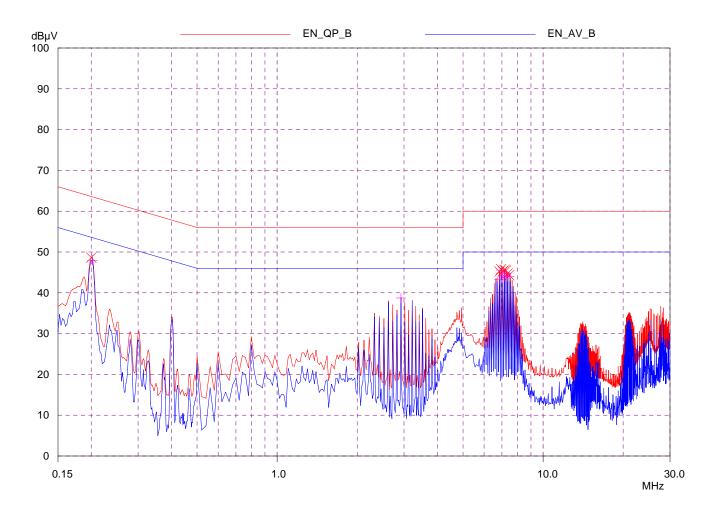

#### conduction test

EUT: MPSM-5500V SPS
Manuf: ZIPPY TECH CO..LTD

Op Cond: FULL LOAD

Operator:

Test Spec: EN 55011-- Class B

Comment: Load Condition (26 19 0.8 20 3.5)

N220V

Scan Settings	(3 Ranges) — Frequencies —				<ul><li>Receiver Se</li></ul>	ttings		
Start	Stop	Step	IF BW	Detector	- Neceiver Se M-Time	Atten	Preamp	OpRge
	•	•						, ,
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer No. Start Stop Name
1 9kHz 30MHz CEB

Prescan Measurement: Detectors: X QP / + AV

Meas Time: see scan settings

Peaks: 8 Acc Margin: 25 dB

#### Peak Search Results

Frequency	QP Level	QP Limit	QP Delta	Phase	PE	
MHz	dΒμV	dΒμV	dB	-	-	
0.2	48.65	63.61	14.96	N	gnd	
6.85	45.22	60.00	14.78	N	gnd	
6.95	45.80	60.00	14.20	N	gnd	
7.05	45.30	60.00	14.70	N	gnd	
7.15	45.62	60.00	14.38	N	gnd	
7.25	45.48	60.00	14.52	N	gnd	
7.35	44.72	60.00	15.28	N	gnd	
7.45	44.33	60.00	15.67	N	gnd	
Frequency	AV Level	AV Limit	AV Delta	Phase	PE	
MHz	dΒμV	dΒμV	dB	-	-	
0.202	47.99	53.53	5.54	N	gnd	
2.92	38.73	46.00	7.27	N	gnd	
6.85	43.21	50.00	6.79	N	gnd	
6.95	45.59	50.00	4.41	N	gnd	
7.05	43.89	50.00	6.11	N	gnd	
7.15	44.21	50.00	5.79	N	gnd	
7.25	44.82	50.00	5.18	N	gnd	
7.45	43.97	50.00	6.03	N	gnd	

<sup>\*</sup> limit exceeded

#### 3.2 Radiation Emission Test


#### 3.2.1 Test Equipment

The following test equipment's are used during the radiated emission test:

Instrument	Manufacture	Type No:	Last Calibration
Spectrum Analyzer	H.P	8594A	May.,2014
Test Receiver	IFR System	A-7550	Jun.,2014
Preamplifier	H.P	8447D	May.,2014
Biconical Ant.	Emco	3110	Jun.,2014
Log-Periodic Ant.	Emco	3146	Jun.,2014
Dipole Antenna	Emco	3121C	May.,2014

#### 3.2.2 Test Setup

#### 3.2.2.1 Block Diagram of Connection between EUT and simulators

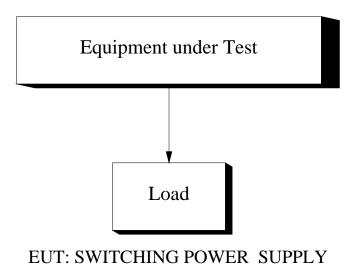


#### 3.2.2.2 Open Field Test Site - description

The open field test site (OFTS) is designed to provide an environment in which repeatable tests of radiated emissions can be carried out.

It consists of a flat elliptical area as shown in the diagram below.

The equipment under test and the antenna are placed at the foci of the ellipse.

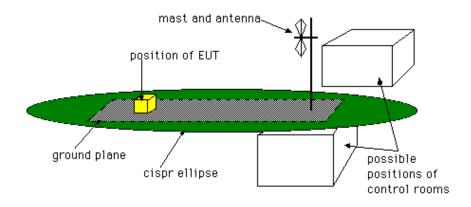

The antenna height should be remotely adjustable from 1m to 4m. Measuring instrumentation should be outside the ellipse at the position shown or in a room under the ground plane.

The whole or part of the site may be enclosed in an RF transparent building.

The whole or part of the site may be enclosed in an RF transparent building.

For precompliance testing a 3m test site with a fixed height antenna (at 1.5-2m height) and no metallic ground plane may be used. This may be a clear area on a car park or a grass area but should be away from large metallic structures.

#### 3.2.3 Radiated Emission Limit

Class B Limits

Frequency	Distance	Field Strength
MHz	Meter	DB(uV/M)
30-230	10	30
230-1000	10	37

#### Remarks:

- 1. The tighter limit shall apply at the edge between two frequency bands.
- 2. Distance refers to the distance in meters between the measuring instrumentantenna and the closed point of any part of the device or system.

#### 3.2.4 EUT Configuration

The equipment's which is listed 4.2.1 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.2.5 Operation Condition of EUT

Same as Conducted Power Line Test which is listed in 3.1.5.

#### 3.2.6 Radiated Emission Data

The measurement range of radiated emission which is from 30 MHz to 1000 MHz was investigated. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

Radiated Emission Data

EUT : <u>SWITCH POWER SUPPLY</u> TEMPERATURE : <u>26°C</u>

TEST MODE : MPSM-5500V HUMIDITY : 60%

	Emission Level		
Frequency	Horizontal	Limits	Remark
(MHz)	dBuV/m	dBuV/m	
62.98	19.70	30.00	
142.52	20.25	30.00	
225.94	18.96	30.00	
249.22	26.21	37.00	
361.74	17.84	37.00	
418.00	15.56	37.00	

Remark: All readings are Quasi-Peak values.

Radiated Emission Data


EUT : <u>SWITCH POWER SUPPLY</u> TEMPERATURE : <u>26°C</u>

TEST MODE : MPSM-5500V HUMIDITY : 60%


	Emission Level		
Frequency	Vertical	Limits	Remark
(MHz)	dBuV/m	dBuV/m	
62.98	25.32	30.00	
146.40	25.79	30.00	
179.38	23.87	30.00	
247.28	26.06	37.00	
264.74	27.42	37.00	
346.22	30.45	37.00	

Remark: All readings are Quasi-Peak values.

#### Horizontal Curve

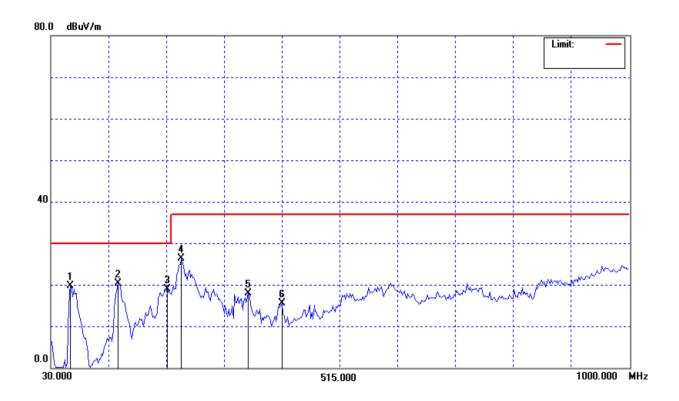


#### Vertical Curve

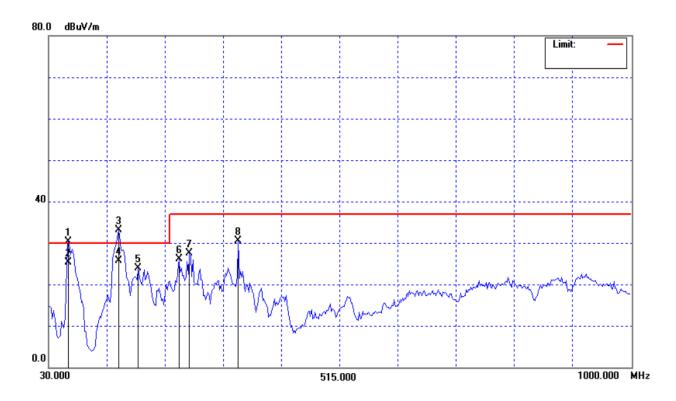

## MODEL: MPSM-5500V

#### 3.2.7 Test Photo and Setup

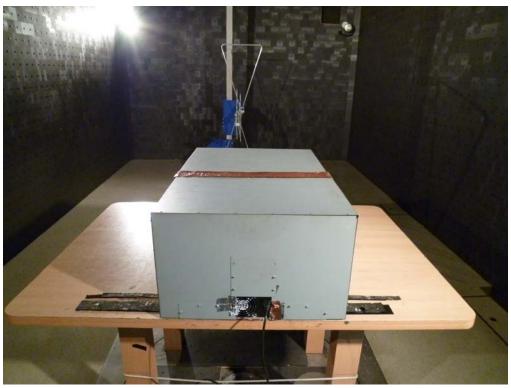

\*During the radiated test, the power-supply has to test with chassis, which is not allowed to be operated stand-alone. (For user, final assembly has to comply with corresponding EMC-and safety-regulations.)

#### 4. ESD Measurement


## 4.1 Test Equipment

The following test equipment's are used during the ESD test:


Instrument	Manufacture	Type No:	Last Calibration
ESD Simulator system	Keytek	MZ-15/EC	May.,2014
Electronic Load	D-RAM	Load-2000	N/A

## 4.2 Test Setup

#### 4.2.1 Block Diagram of Connections between EUT and simulators

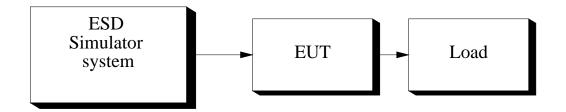

#### 4.2.2 Test Setup of EUT

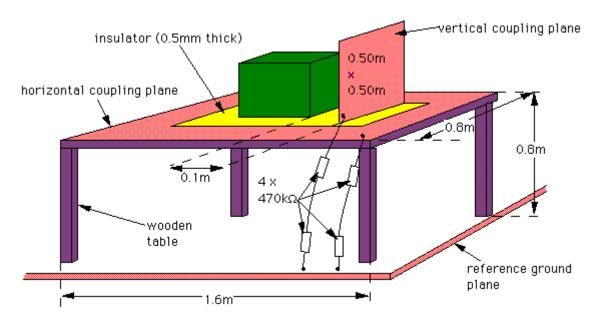

## 4.3 Severity Levels

LEVEL	TEST VOLTAGE CONTACT DISCHARGE	TEST VOLTAGE AIR DISCHARGE
1	2KV	2KV
2	4KV	4KV
3	6KV	6KV
4	8KV	8KV
X	SPECIAL	SPECIAL

## 4.4 EUT Operating Condition

- 1. Setup the EUT and Test Equipment as shown on 4.2
- 2. power on.

#### 4.5 Test Procedure

#### Air Discharge:

This test was done above a non-conductive surfaces. The round discharge electrode about 30cm away will approach as fast as possible to touch test points of the EUT.

Discharge happens before the contact. This procedure is repeated ten times on one selected location.

#### 4.6 Test Method

According to IEC 61000-4-2

## 4.7 Test Result

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : **MPSM-5500V** HUMIDITY : <u>65</u>%

Item	Amount of discharge	Voltage	Results
Contact discharge	500	+2KV -2KV	Pass Pass
Contact discharge	500	+4KV -4KV	Pass Pass
Contact discharge	500	+6KV -6KV	Pass Pass
Air discharge	500	+2KV -2KV	Pass Pass
Air discharge	500	+4KV -4KV	Pass Pass
Air discharge	500	+6KV -6KV	Pass Pass
Air discharge	500	+8KV -8KV	Pass Pass

<sup>%</sup>Input Voltage / Frequency : 230Vac/50Hz


## 5. Radiated Susceptibility Measurement

#### 5.1 Test Equipment

The following test equipment's are used during the RS test:

Instrument	Manufacture	Type No:	Last Calibration
Signal generator	H.P	8657A	Dec.,2013
Power amplifier	A&R	100A100	Dec.,2013
Field strength meter	A&R	FM2000	Oct.,2013
Field strength sensor	A&R	EP2000	Oct.,2013
Power antenna	A&R	AT1080	Oct.,2013

#### 5.2 Block Diagram of Test Setup

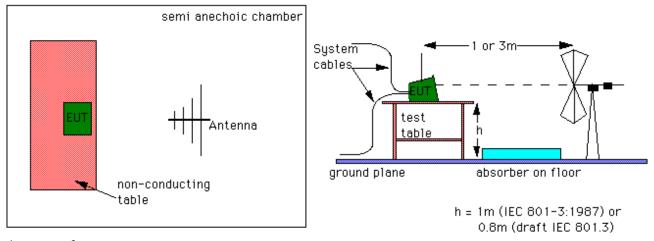

Antennas-layout

For the upper frequency range of 200 to 2500 MHz, antennas are the normal method of producing the required field strength. This is also carried out in an anechoic chamber or a screened room. If a screened room is used it must be damped. The anechoic chamber should be used for compliance testing, the screened room may be used for precompliance testing. The fields in the screened room will not be as uniform as those obtainable in an anechoic chamber and will also not be as repeatable. The EUT is placed on a non-conductive table, 0.8 m above the reference ground plane, which in many cases will be the floor of a screened room. According to the standards, the EUT should be oriented so that its most sensitive side is facing the antenna. In practice it can be difficult to decide beforehand which is the most sensitive side, and in most cases, a series of tests will be required with the EUT in several orientations.

#### 5.3 Severity Levels

LEVEL	FIELD STRENGTH V/M
1	1
2	3
3	10
X	SPECIAL

#### 5.4 EUT Operating Condition

Same as section 4.4.

#### 5.5 Test Procedure

The EUT and load are placed on a table which is 0.8 meter above ground. The field sensor is also placed on the same table to monitor field strength from transmitting antenna.

EUT is set 1 meter away from the transmitting antenna which is mounted on an antenna each time.

The antenna is fixed 1 meter above ground. Both horizontal and vertical polarization of the antenna are set on measurement. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows:

Condition of Test Remarks

1. Field Strength 3 V/M Level 2

2. Radiated Signal 80% Amplitude Modulated with a 1KHz Tone

3. Scanning Frequency
4. Sweep Time of Radiated
80 MHz-2.5 GHz
0.0015 Decade/s

#### 5.6 Test Method

According to IEC 61000-4-3

## 5.7 Test Result

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : MPSM-5500V HUMIDITY : 65%

Frequency Range (MHz)	Position (Angle)	Polarity (HorV)	Field Strength (V/M)	Results
80-2500	0° (Front)	Н	3	Pass
80-2500	90° (Right)	Н	3	Pass
80-2500	180° (Back)	Н	3	Pass
80-2500	270° (Left)	Н	3	Pass
80-2500	0° (Front)	V	3	Pass
80-2500	90° (Right)	V	3	Pass
80-2500	180° (Back)	V	3	Pass
80-2500	270° (Left)	V	3	Pass

Test Result: Criteria A


## 6. Electrical Fast Transient / Burst Measurement

## 6.1 Test Equipment

The following test equipment's are used during the EFT tests:

Instrument	Manufacturer	Type No.	Last Calibration
Fast Transient / Burst enerator	Keytek	EMCpro	May.,2014

## 6.2 Block Diagram of Test Setup

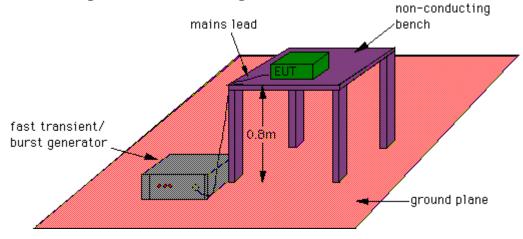

## 6.3 Severity Levels

	Open Circuit Output Test Voltage +/- 10%					
Level On power supply lines						
1	0.5KV					
2	1KV					
3	2KV					
4	4KV					
X	SPECIAL					

## 6.4 EUT Operation Condition

Same as section 4.4.

#### 6.5 Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m\*1m min. And 0.65 mm thick min. And projected beyond the EUT by at least 0.1m on all sides.

The EUT is away from the walls of the test AC power line test is as follows:

For Ac power line test:

The EUT is connected to the power mains through a coupling device that directly couples the EFT interference signal.

Each of the Line and Neutral conductor is impressed with burst noise for 1 min.

#### 6.6 Test Method

According to IEC 61000-4-4.

## 6.7 Test Result

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : **MPSM-5500V** HUMIDITY : <u>65</u>%

Inject Line	Voltage KV	Inject time (sec) Inject Method		Result
L1	+/-1	60	Direct	Pass
L2	+/-1	60	Direct	
PE	+/-1	60	Direct	Pass
L1-L2	+/-1	60	Direct	Pass
L1-PE	+/-1	60	Direct	Pass
L2-PE	+/-1	60	Direct	Pass
L1,L2-PE	+/-1	60	Direct	Pass

%Input Voltage / Frequency : 230Vac/50Hz

## 7. Harmonic Current Test

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C


TEST MODE : MPSM-5500V HUMIDITY : 65%

Item	Reading	g Leve A	Item	Readin	Reading Leve A		
Helli	A	Limites	Item	A	Limites		
1	2.566						
3	0.279	1.988					
5	0.044	1.111					
7	0.058	0.585					
9	0.010	0.292					
11	0.041	0.205					
13	0.037	0.173					
15	0.017	0.150					
17	0.012	0.132					
19	0.011	0.118					
21	0.015	0.107					
23	0.012	0.098					
25	0.007	0.090					
27	0.006	0.083					
29	0.003	0.078					
31	0.005	0.073					
33	0.004	0.068					
35	0.003	0.064					
37	0.002	0.061					
39	0.001	0.058					

MODEL: MPSM-5500V

## Chroma

#### ANALYZER 6630

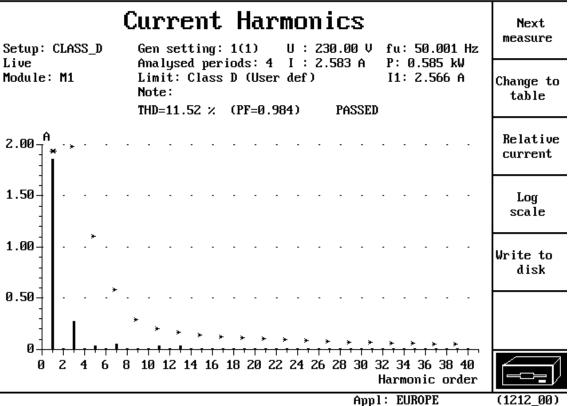

## Chroma

#### ANALYZER 6630

<u> </u>	<u>oma</u>			ANAI	LYZER 663	0			
Setup: CL	.ASS_D	Gen :	setti	ng: 1(1		230.0	0 V fu	: 50.001 Hz	<b>N</b> ext measure
Live Module: M	11	Limii <b>N</b> ote	t: C1 :		Jser def)			0.585 k₩ : 2.566 A	Change to bar graph
No	A	Lim A	No	A	Lim A	No	A	Lim A	Relative current
1 2	.566		15	0.017	0.150	29	0.003	0.078	
	.002		16	0.000		30	0.000		
3 0	.279	1.988	17	0.012	0.132	31	0.005	0.073	
	.000		18	0.000		32	0.000		
5 0	.044	1.111	19	0.011	0.118	33	0.004	0.068	
60	.000		20	0.000		34	0.000		Write to
	.058	0.585	21	0.015	0.107	35	0.003	0.064	disk
	.000		22	0.000		36	0.000		4135
	.010	0.292	23	0.012	0.098	37	0.002	0.061	
	.000		24	0.000		38	0.000		
	.041	0.205	25	0.007	0.090	39	0.001	0.058	
	.000		26	0.000		40	0.000		1
	.037	0.173	27	0.006	0.083				
	.000		28	0.000					
Current r	`ange :	10 Ap							

Appl: EUROPE

(1212\_01)

## 8. Voltage Fluctuation And Flicker Test

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : MPSM-5500V HUMIDITY : 65%

Item	Reading	Limit	Result
Pst	0.000	1.00	Pass
P1t	0.000	0.65	Pass
Dc (%)	0.000	3.00	Pass
Dmax (%)	0.000	4.00	Pass
Dt (%)	0.000	0.20	Pass

## 9. Surge Immunity Test

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : MPSM-5500V HUMIDITY : 65%

Waveform	Voltage	Output:LC	Phs Ref	Phs Ang	Tests	Delay	Result
12 Ohm	-2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	270 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec	Pass

## 10. Conducted Immunity Test

EUT : SWITCH POWER SUPPLY TEMPERATURE : 26°C

TEST MODE : MPSM-5500V HUMIDITY : 65%

Test frequency Range: 150kHz ~ 80MHz

Frequency Step: 1% of the momentary frequency Dwell Time: Minimum 3 sec. per frequency

Modulation: 1kHz Sine Wave with 80% Amplitude Modulation

Frequency Range	Polarity	Field Strength	Perfor	mance	Result
(MHz)	(HorV)	(V/M)	Required	Observation	Result
0.15-80	Н	3	A	A	Pass

## 11. Voltage Dip, Interruptions Immiunity Test

EUT : SWITCH POWER SUPPLY TEMPERATURE :  $26^{\circ}$ C

TEST MODE : MPSM-5500V HUMIDITY : 65%

Test Voltage	Reduction	Duration	Performance	Results	
Test voltage	%	(Periods)	Required	Results	
	100	0.5	A	Pass	
	100	1	В	Pass	
AC 115V	60	5	В	Pass	
	30	25	С	Pass	
	100	250	С	Pass	
	100	0.5	A	Pass	
	100	1	В	Pass	
AC 230V	60	5	В	Pass	
	30	25	С	Pass	
	100	250	С	Pass	

## 12. Power Frequency Magnetic Field (PFM) Immunity Test

EUT : <u>SWITCH POWER SUPPLY</u> TEMPERATURE : <u>26°C</u>

TEST MODE : **MPSM-5500V** HUMIDITY : <u>65</u>%

Magnetic Field	Magnetic Field	Perfor	Result	
Orientation	(A/m)	Required	Observation	Result
X-axis	1A	A	A	Pass
Y-axis	1A	A	A	Pass
Z-axis	1A	A	A	Pass


## MODEL: MPSM-5500V


- **13. Photographs**1.Front view of Power Supply
  2.Back view of Power Supply



## MODEL: MPSM-5500V

- 3.Component side of Mainboard
- 4.Solder side of Mainboard

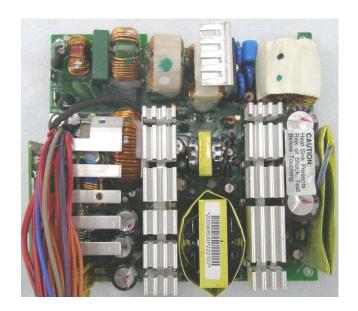

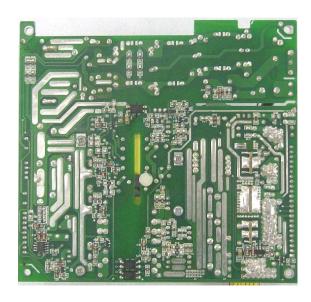

5.Inside view of Power Supply 6.Inside view of Power Supply





## MODEL: MPSM-5500V

## 7.Test view



## 14. EMI Reduction Method During Compliance Testing

1.No modification was made during test.