

ZIPPY EMC LAB

conduction test


EUT: H1U-6250P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (10 17 0.2 0.5 9 2)
 L110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

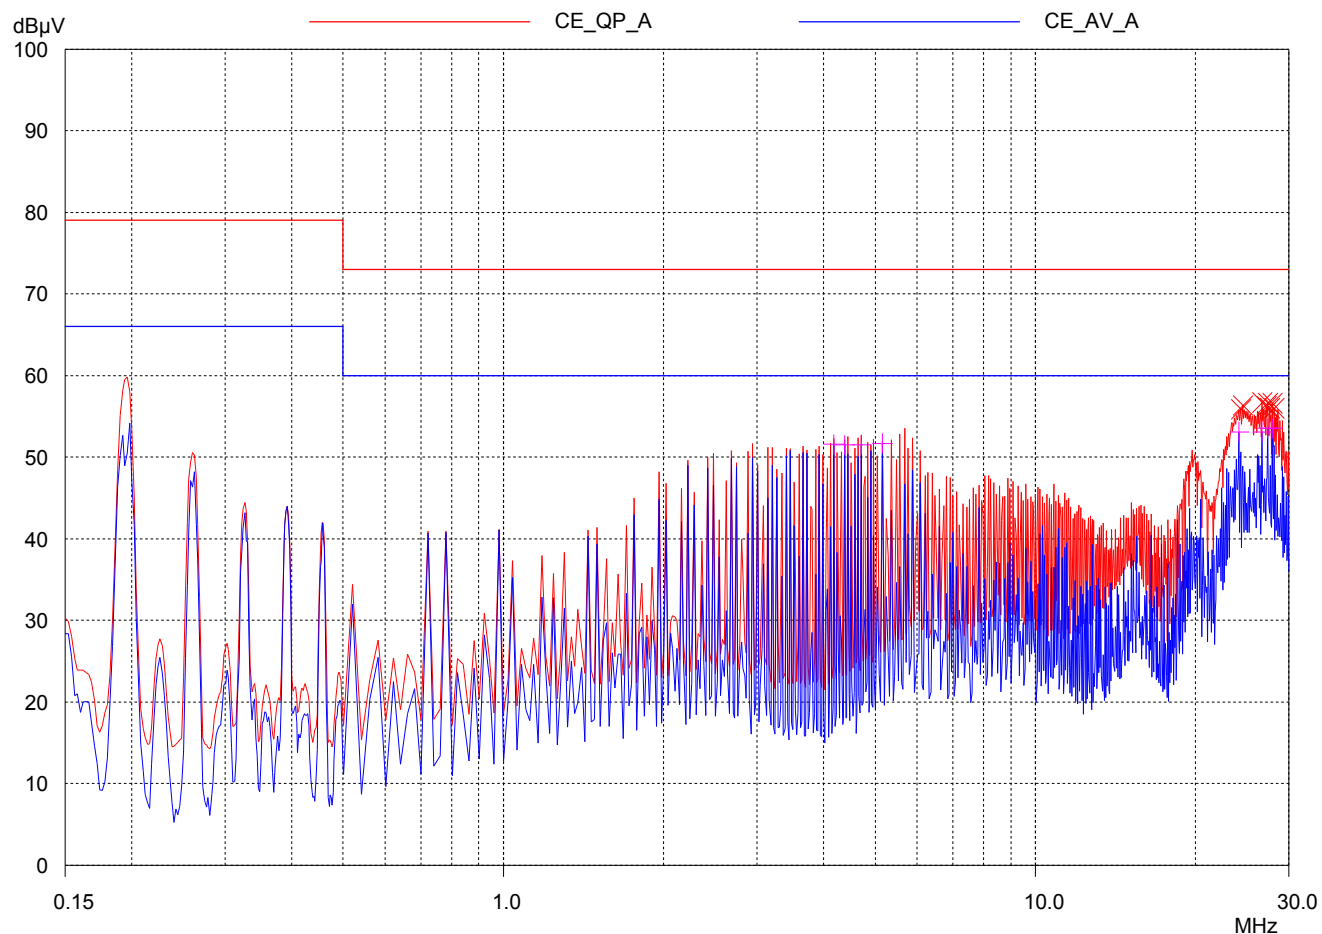

ZIPPY EMC LAB

conduction test

EUT: H1U-6250P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (10 17 0.2 0.5 9 2)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
24.36	55.85	73.00	17.15	N	gnd
24.56	56.33	73.00	16.67	N	gnd
26.64	56.67	73.00	16.33	N	gnd
27.16	56.20	73.00	16.80	N	gnd
27.36	56.61	73.00	16.39	N	gnd
27.56	55.97	73.00	17.03	N	gnd
27.88	56.59	73.00	16.41	N	gnd
28.08	55.96	73.00	17.04	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
4.18	51.56	60.00	8.44	N	gnd
4.38	51.46	60.00	8.54	N	gnd
4.7	51.51	60.00	8.49	N	gnd
5.16	51.67	60.00	8.33	N	gnd
24.16	53.07	60.00	6.93	N	gnd
26.64	53.09	60.00	6.91	N	gnd
27.36	53.50	60.00	6.50	N	gnd
27.88	53.50	60.00	6.50	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB


conduction test

EUT: H1U-6250P SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class A
Comment: Load Condition (10 17 0.2 0.5 9 2)
N110V

Scan Settings			(3 Ranges)		Receiver Settings			
Frequencies								
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

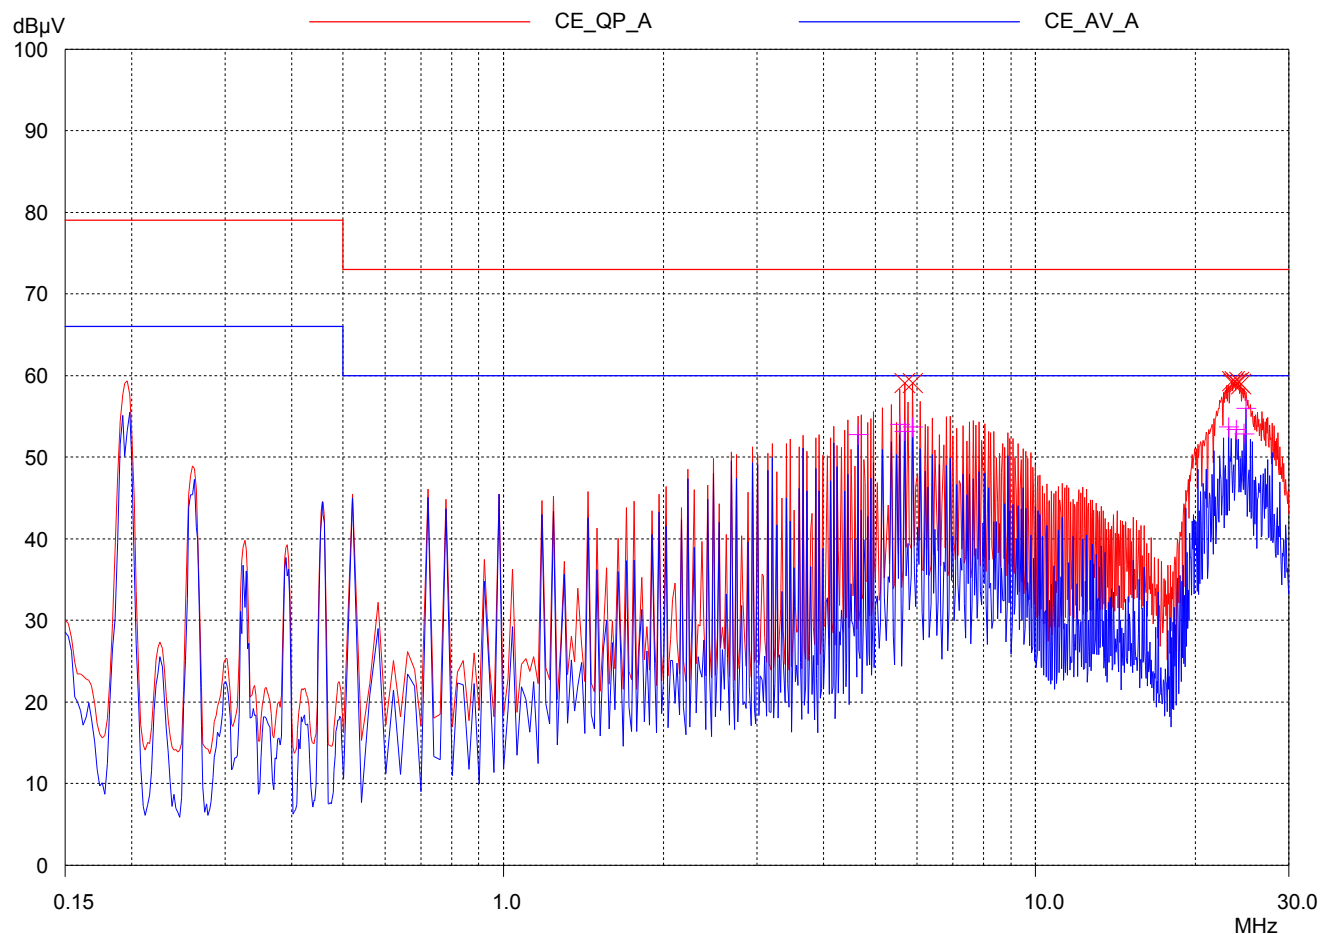

ZIPPY EMC LAB

conduction test

EUT: H1U-6250P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (10 17 0.2 0.5 9 2)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
5.68	59.04	73.00	13.96	N	gnd
5.88	59.07	73.00	13.93	N	gnd
23.44	59.31	73.00	13.69	N	gnd
23.52	58.93	73.00	14.07	N	gnd
23.64	59.26	73.00	13.74	N	gnd
23.84	59.08	73.00	13.92	N	gnd
24.16	59.18	73.00	13.82	N	gnd
24.36	58.94	73.00	14.06	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
4.64	52.73	60.00	7.27	N	gnd
5.56	53.99	60.00	6.01	N	gnd
5.68	53.17	60.00	6.83	N	gnd
5.88	53.66	60.00	6.34	N	gnd
23.08	53.68	60.00	6.32	N	gnd
23.84	53.35	60.00	6.65	N	gnd
24.68	52.84	60.00	7.16	N	gnd
24.88	55.96	60.00	4.04	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission