

ZIPPY EMC LAB

18 Jun 2001 12:12


conduction test

EUT: P2U-6300P SPS
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition (12 16 0.5 1 17 1.2)
 L110V

Scan Settings		(2 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

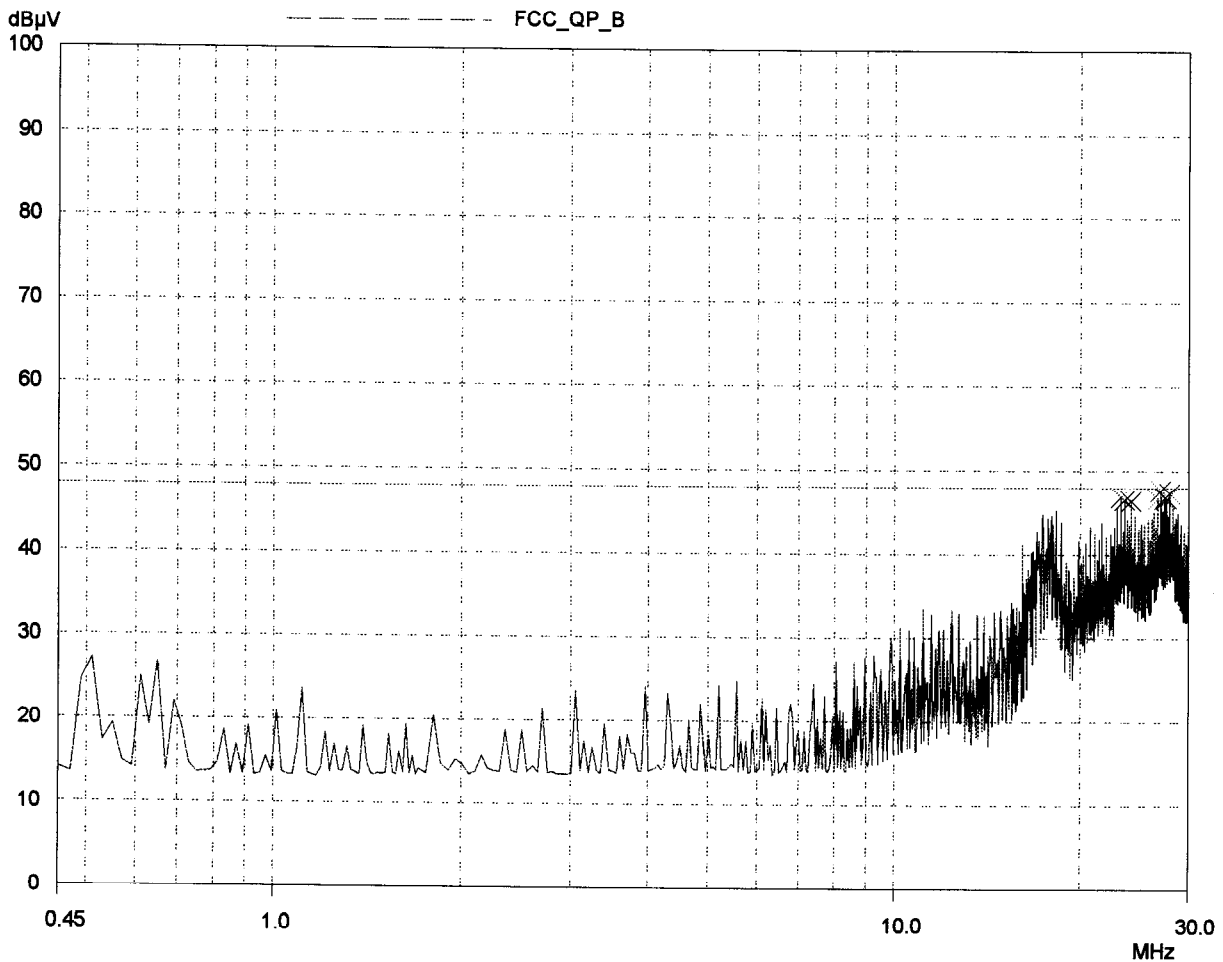

ZIPPY EMC LAB

18 Jun 2001 12:12

conduction test

EUT: P2U-6300P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition (12 16 0.5 1 17 1.2)
 L110V

Scan Settings		(2 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
23.255	46.88	48.00	1.12	N	gnd
23.605	46.58	48.00	1.42	N	gnd
24.155	46.45	48.00	1.55	N	gnd
26.655	46.72	48.00	1.28	N	gnd
27.005	47.70	48.00	0.30	N	gnd
27.355	46.78	48.00	1.22	N	gnd
27.555	46.76	48.00	1.24	N	gnd
27.905	47.35	48.00	0.65	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

18 Jun 2001 11:52


conduction test

EUT: P2U-6300P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition (12 16 0.5 1 17 1.2)
 N110V

Scan Settings		(2 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

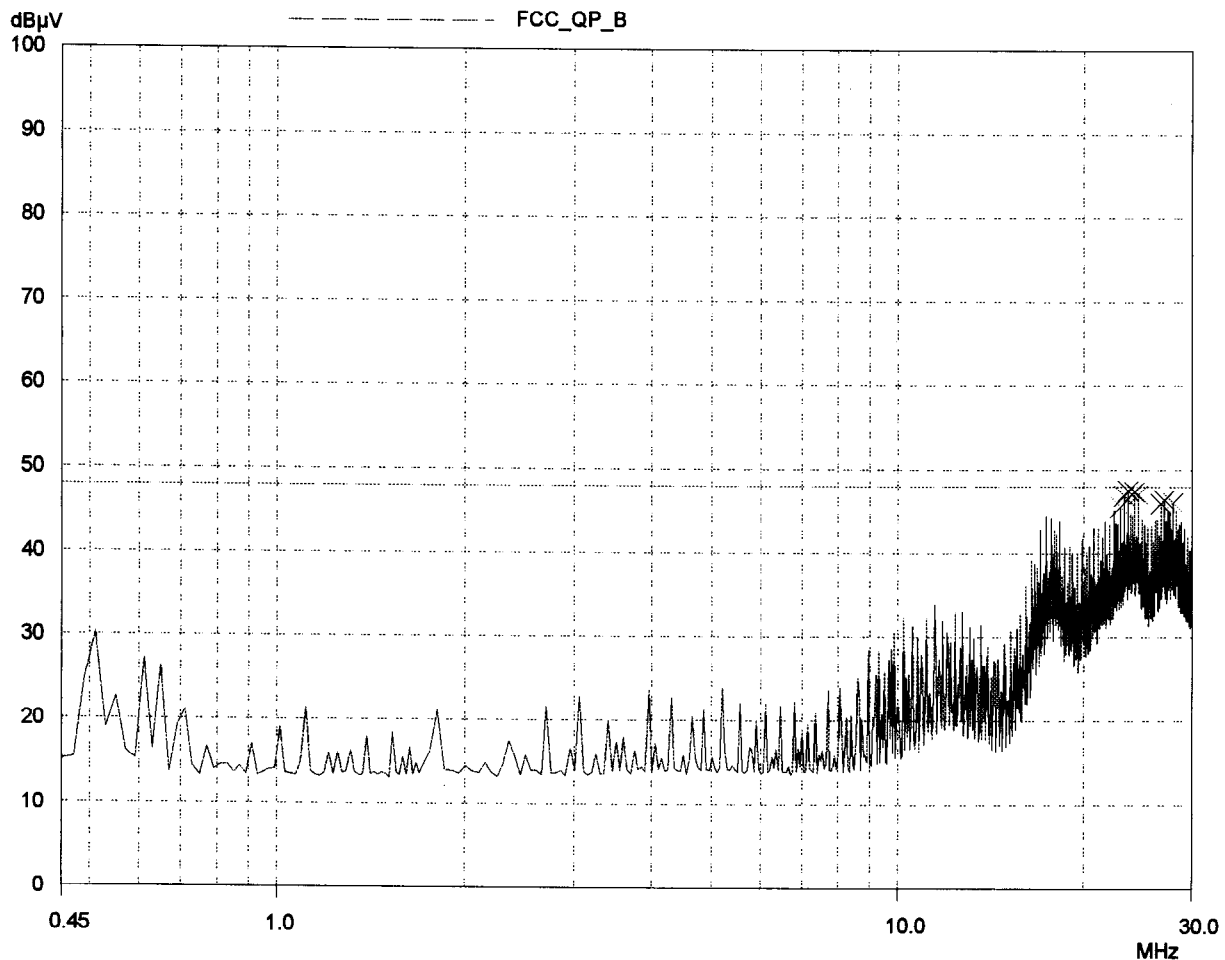

ZIPPY EMC LAB

18 Jun 2001 11:52

conduction test

EUT: P2U-6300P SPS
Manuf: ZIPPY TECH CO.,LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC – Class B
Comment: Load Condition (12 16 0.5 1 17 1.2)
N110V

Scan Settings		(2 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
22.905	45.63	48.00	2.37	N	gnd
23.255	46.94	48.00	1.06	N	gnd
23.605	47.55	48.00	0.45	N	gnd
24.155	47.40	48.00	0.60	N	gnd
24.505	47.08	48.00	0.92	N	gnd
26.655	45.99	48.00	2.01	N	gnd
27.005	46.46	48.00	1.54	N	gnd
27.905	46.11	48.00	1.89	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission