

ZIPPY EMC LAB

17 May 2002 13:50


conduction test

EUT: P2U-6320P SPS
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC - Class B
 Comment: Load Condition (12 23 0.5 1 12 1.2)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

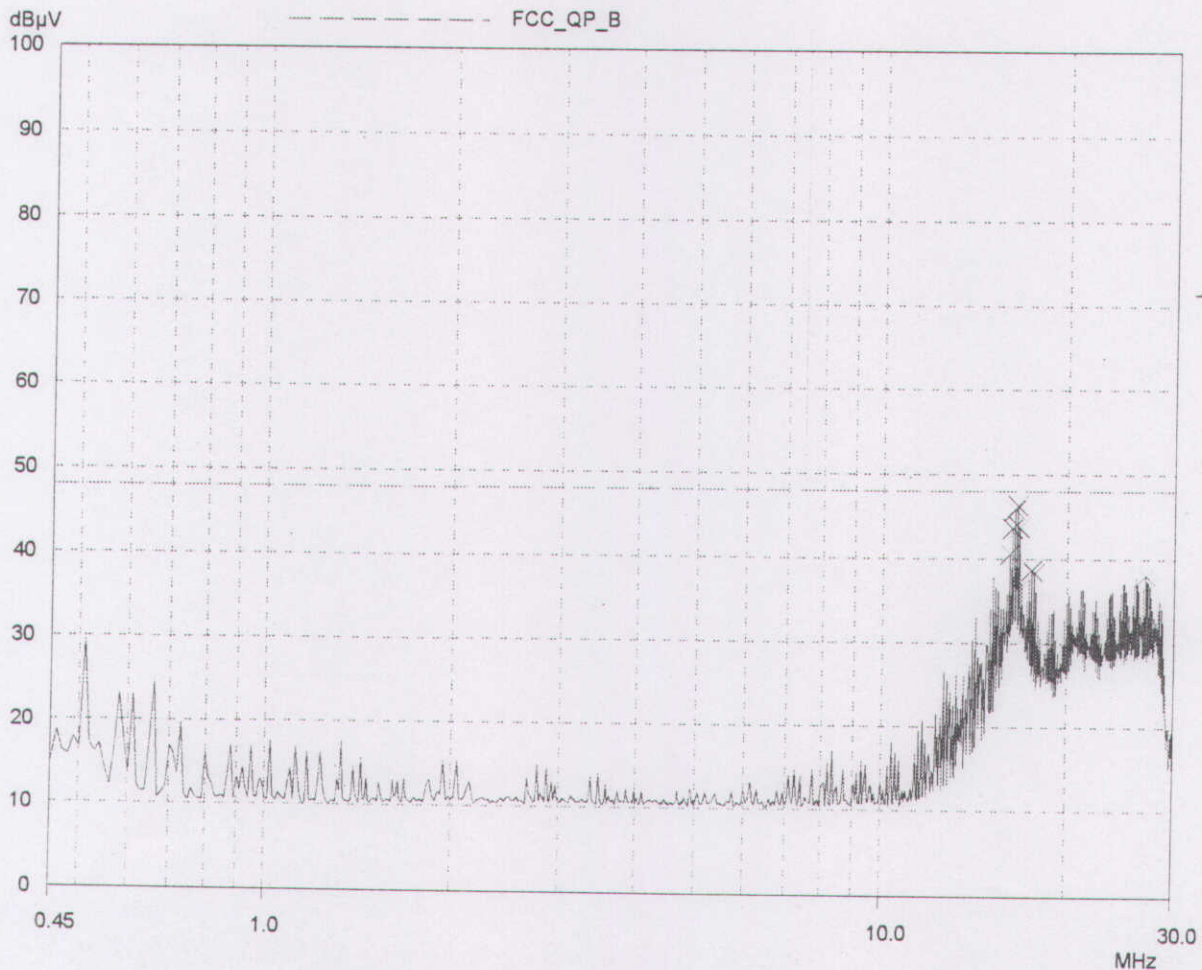

ZIPPY EMC LAB

17 May 2002 13:50

conduction test

EUT: P2U-6320P SPS
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC – Class B
 Comment: Load Condition (12 23 0.5 1 12 1.2)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase	PE
16.05	40.61	48.00	7.39	N	gnd
16.2	43.62	48.00	4.38	N	gnd
16.35	45.84	48.00	2.16	N	gnd
16.5	46.32	48.00	1.68	N	gnd
16.65	43.72	48.00	4.28	N	gnd
17.45	38.74	48.00	9.26	N	gnd
17.6	38.33	48.00	9.67	N	gnd
26.85	38.13	48.00	9.87	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

17 May 2002 14:01


conduction test

EUT: P2U-6320P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition (12 23 0.5 1 12 1.2)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

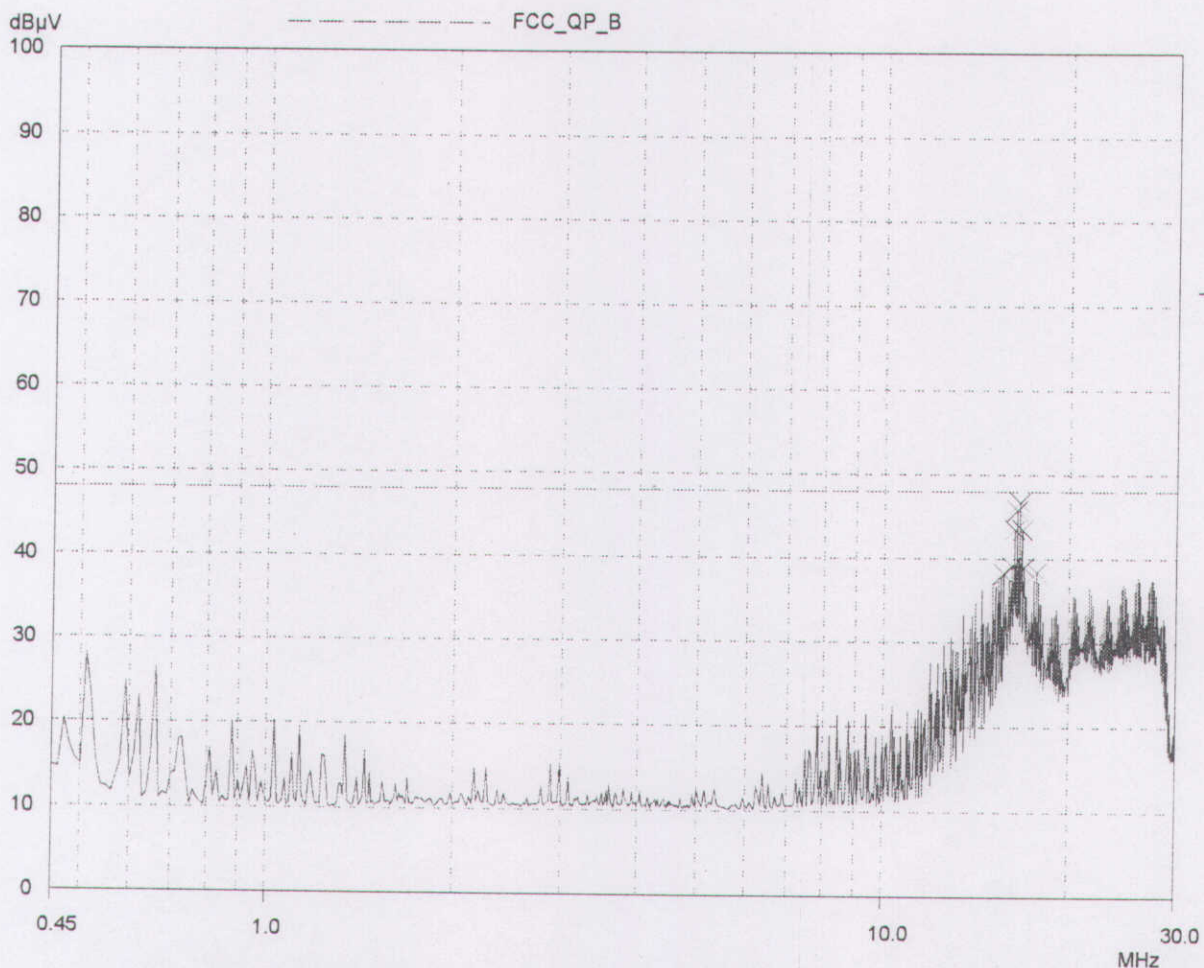

ZIPPY EMC LAB

17 May 2002 14:01

conduction test

EUT: P2U-6320P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC - Class B
 Comment: Load Condition (12 23 0.5 1 12 1.2)
 L110V

Scan Settings (3 Ranges)

Frequencies					Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase	PE
15.6	38.23	48.00	9.77	N	gnd
16.1	39.08	48.00	8.92	N	gnd
16.25	43.52	48.00	4.48	N	gnd
16.4	45.82	48.00	2.18	N	gnd
16.55	46.75	48.00	1.25	N	gnd
16.7	43.51	48.00	4.49	N	gnd
16.85	39.00	48.00	9.00	N	gnd
17.65	38.41	48.00	9.59	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission