

ZIPPY EMC LAB

conduction test

20 May 2002 14:34

EUT: R3G-6650P SPS (2U)
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC - Class B
 Comment: Load Condition (27 39 1 1 30 2.5)
 N110V

Scan Settings

(3 Ranges)

Frequencies


Start	Stop	Step	IF BW	Detector
450kHz	1.705MHz	10kHz	10kHz	QP
1.705MHz	5MHz	20kHz	10kHz	QP
5MHz	30MHz	50kHz	10kHz	QP

Receiver Settings

M-Time	Atten	Preamp	OpRge
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

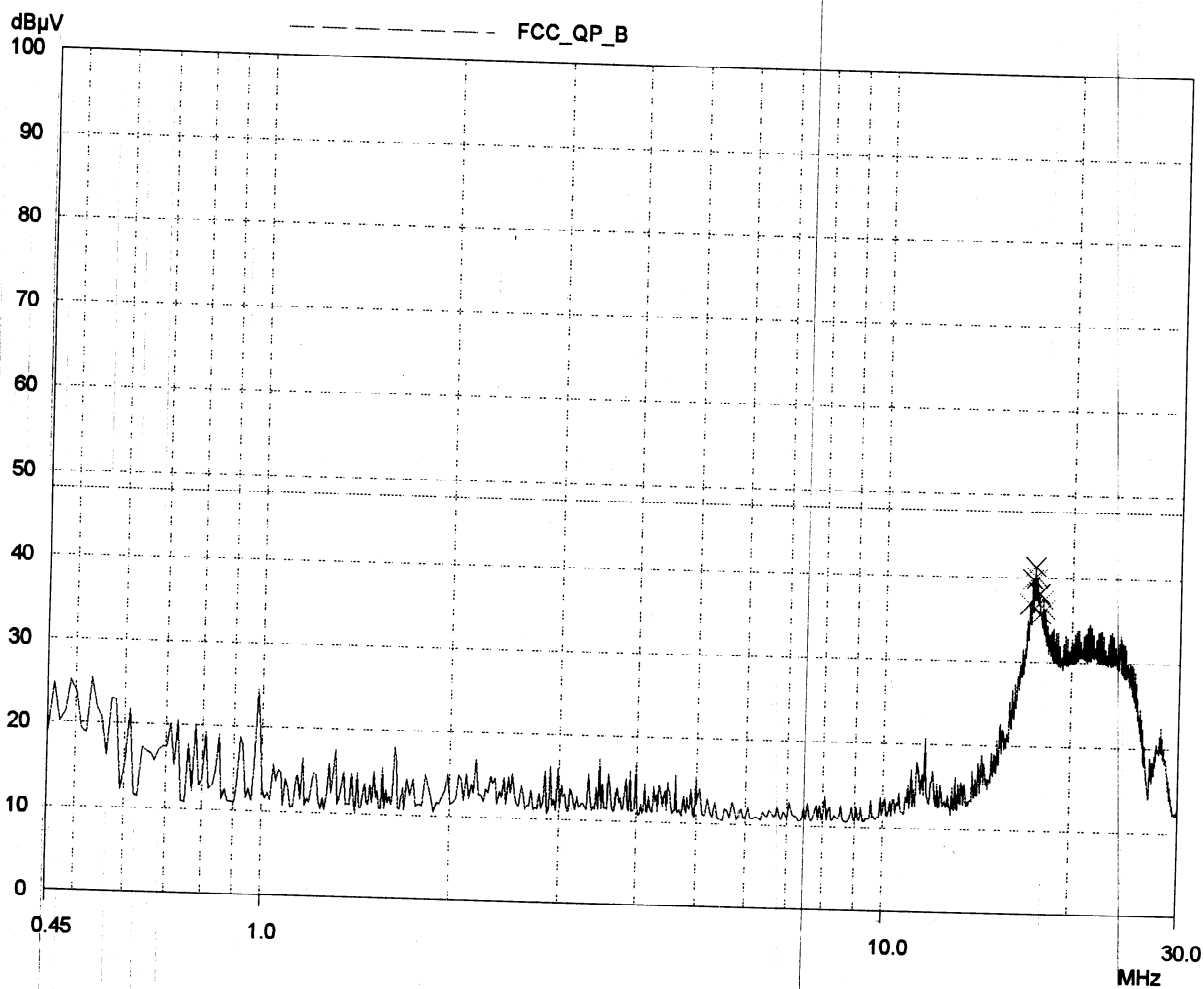

ZIPPY EMC LAB

conduction test

20 May 2002 14:34

EUT: R3G-6650P SPS (2U)
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC - Class B
 Comment: Load Condition (27 39 1 1 30 2.5)
 N110V

Scan Settings

(3 Ranges)

Frequencies

Start	Stop	Step	IF BW	Detector
450kHz	1.705MHz	10kHz	10kHz	QP
1.705MHz	5MHz	20kHz	10kHz	QP
5MHz	30MHz	50kHz	10kHz	QP

Receiver Settings

M-Time	Atten	Preamp	OpRge
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
17.05	36.91	48.00	11.09	N	-
17.2	39.87	48.00	8.13	N	gnd
17.35	41.39	48.00	6.61	N	gnd
17.5	40.03	48.00	7.97	N	gnd
17.65	38.16	48.00	9.84	N	gnd
17.75	35.77	48.00	12.23	N	gnd
17.9	37.43	48.00	10.57	N	gnd
18.05	36.28	48.00	11.72	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test

20 May 2002 15:01

EUT: R3G-6650P SPS (2U)
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC – Class B
 Comment: Load Condition (27 39 1 1 30 2.5)
 L110V

Scan Settings

(3 Ranges)


Frequencies			IF BW	Detector
Start	Stop	Step		
450kHz	1.705MHz	10kHz	10kHz	QP
1.705MHz	5MHz	20kHz	10kHz	QP
5MHz	30MHz	50kHz	10kHz	QP

Receiver Settings

M-Time	Atten	Preamp	OpRge
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

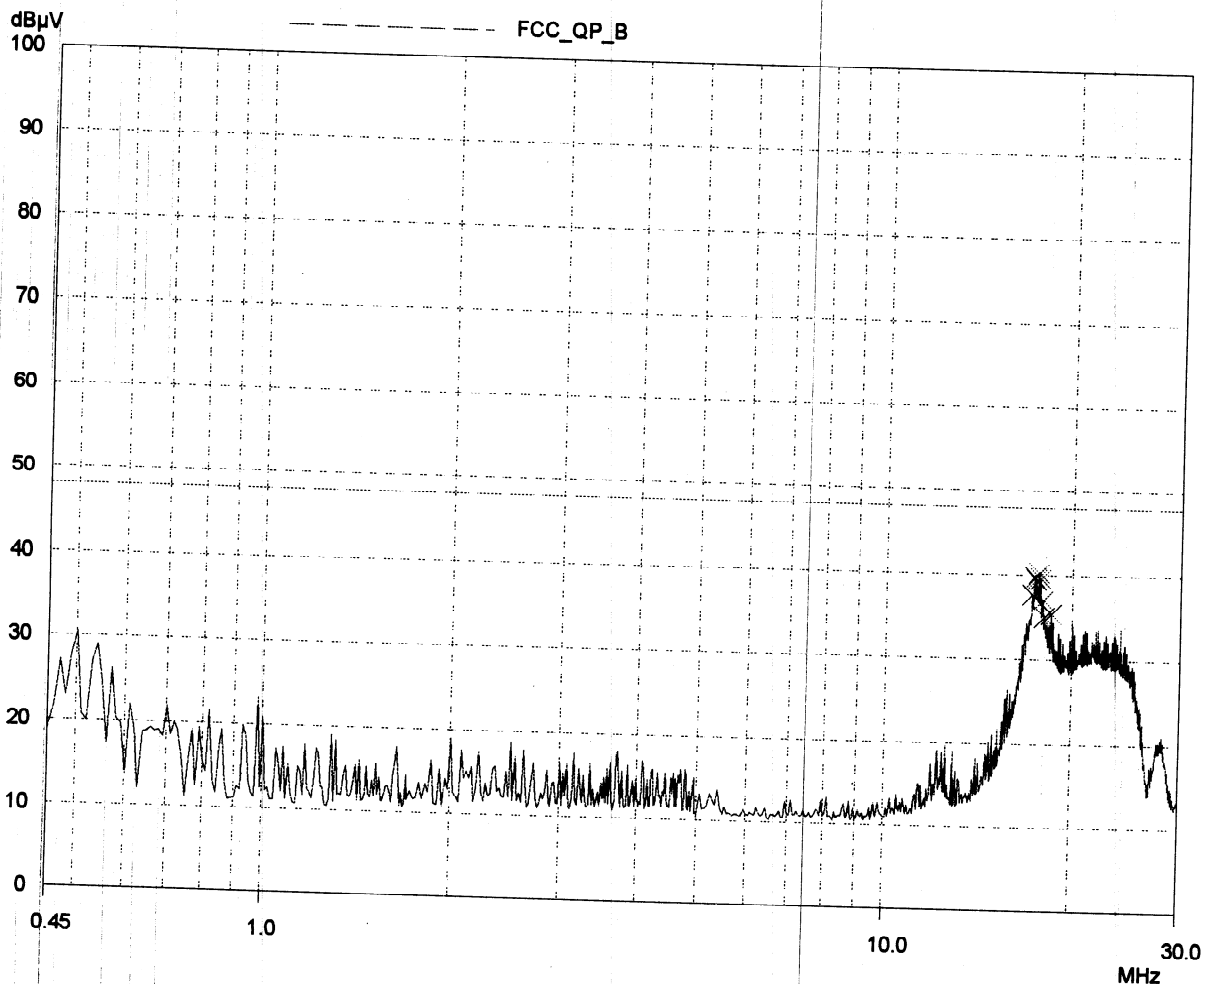

ZIPPY EMC LAB

conduction test

20 May 2002 15:01

EUT: R3G-6650P SPS (2U)
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC - Class B
 Comment: Load Condition (27 39 1 1 30 2.5)
 L110V

Scan Settings

(3 Ranges)

Frequencies

Start	Stop	Step	IF BW	Detector
450kHz	1.705MHz	10kHz	10kHz	QP
1.705MHz	5MHz	20kHz	10kHz	QP
5MHz	30MHz	50kHz	10kHz	QP

Receiver Settings

M-Time	Atten	Preamp	OpRge
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB
1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
17.2	37.67	48.00	10.33	N	
17.35	39.69	48.00	8.31	N	gnd
17.45	39.47	48.00	8.53	N	gnd
17.6	40.25	48.00	7.75	N	gnd
17.75	39.57	48.00	8.43	N	gnd
17.9	37.05	48.00	10.95	N	gnd
18.0	35.03	48.00	12.97	N	gnd
18.45	35.47	48.00	12.53	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission