

ZIPPY EMC LAB

conduction test


EUT: H1U-6200P SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class A
Comment: Load Condition (7 14 0.2 0.5 10 2)
L110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

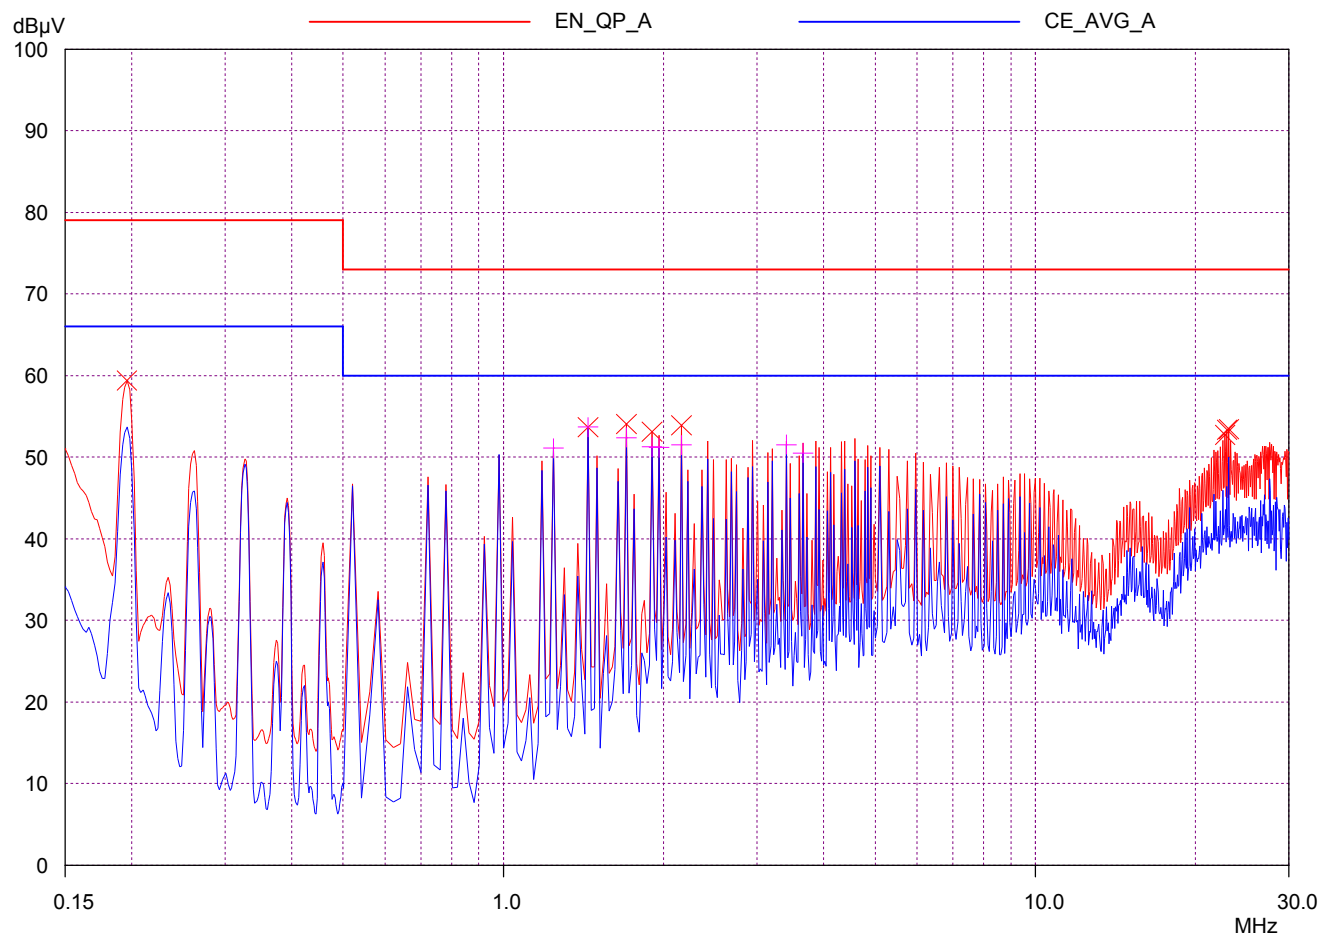

ZIPPY EMC LAB

conduction test

EUT: H1U-6200P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (7 14 0.2 0.5 10 2)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.196	59.36	79.00	19.64	N	gnd
1.44	53.66	73.00	19.34	N	gnd
1.7	54.06	73.00	18.94	N	gnd
1.9	53.07	73.00	19.93	N	gnd
2.16	53.90	73.00	19.10	N	gnd
22.7	52.71	73.00	20.29	N	gnd
22.9	53.31	73.00	19.69	N	gnd
23.1	53.42	73.00	19.58	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
1.24	51.07	60.00	8.93	N	gnd
1.44	53.67	60.00	6.33	N	gnd
1.7	52.38	60.00	7.62	N	gnd
1.9	51.22	60.00	8.78	N	gnd
1.96	51.16	60.00	8.84	N	gnd
2.16	51.47	60.00	8.53	N	gnd
3.4	51.50	60.00	8.50	N	gnd
3.66	50.50	60.00	9.50	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test


EUT: H1U-6200P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (7 14 0.2 0.5 10 2)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

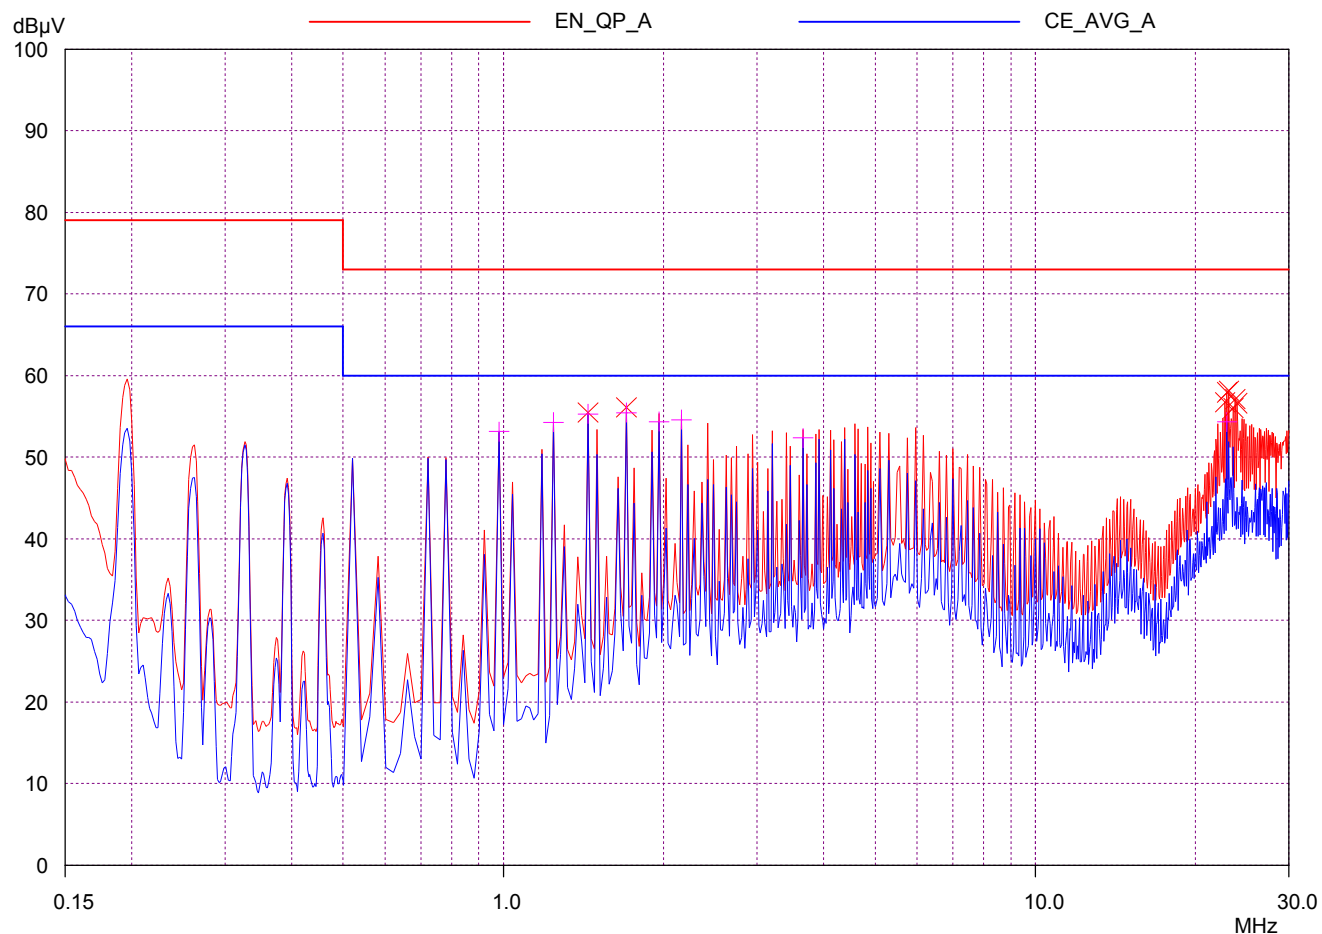

ZIPPY EMC LAB

conduction test

EUT: H1U-6200P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (7 14 0.2 0.5 10 2)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
1.44	55.46	73.00	17.54	N	gnd
1.7	56.10	73.00	16.90	N	gnd
22.7	56.72	73.00	16.28	N	gnd
22.9	57.93	73.00	15.07	N	gnd
23.1	58.13	73.00	14.87	N	gnd
23.55	56.03	73.00	16.97	N	gnd
23.75	57.08	73.00	15.92	N	gnd
23.95	56.58	73.00	16.42	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.98	53.12	60.00	6.88	N	gnd
1.24	54.26	60.00	5.74	N	gnd
1.44	55.30	60.00	4.70	N	gnd
1.7	55.43	60.00	4.57	N	gnd
1.96	54.35	60.00	5.65	N	gnd
2.16	54.58	60.00	5.42	N	gnd
3.66	52.34	60.00	7.66	N	gnd
22.9	54.28	60.00	5.72	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission