

ZIPPY EMC LAB


conduction test

EUT: P2G-5600G SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (36 18 0.5 18 3)
 L110V

Scan Settings			(3 Ranges)						Receiver Settings			
Frequencies												
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge				
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB				
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB				
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB				

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

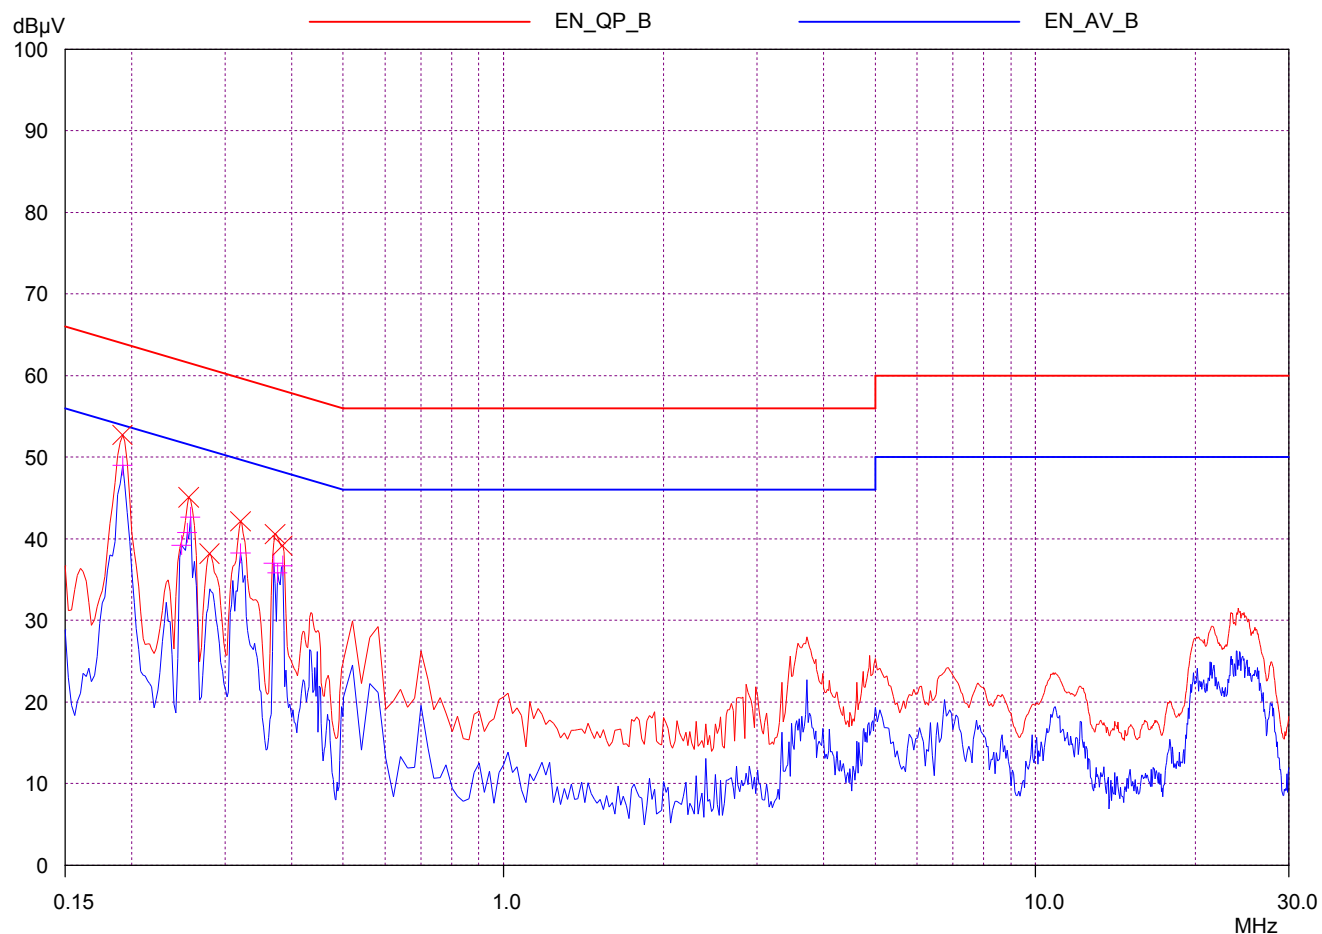

ZIPPY EMC LAB

conduction test

EUT: P2G-5600G SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (36 18 0.5 18 3)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.192	52.68	63.95	11.27	N	gnd
0.256	45.06	61.56	16.50	N	gnd
0.28	38.16	60.82	22.66	N	gnd
0.32	42.10	59.71	17.61	N	gnd
0.372	40.57	58.46	17.89	N	gnd
0.384	39.17	58.19	19.02	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.192	48.95	53.95	5.00	N	gnd
0.248	39.22	51.82	12.60	N	gnd
0.254	40.72	51.63	10.91	N	gnd
0.258	42.63	51.50	8.87	N	gnd
0.32	38.21	49.71	11.50	N	gnd
0.37	36.98	48.50	11.52	N	gnd
0.376	35.76	48.37	12.61	N	gnd
0.384	36.67	48.19	11.52	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB


conduction test

EUT: P2G-5600G SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (36 18 0.5 18 3)
 N110V

Scan Settings			(3 Ranges)		Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

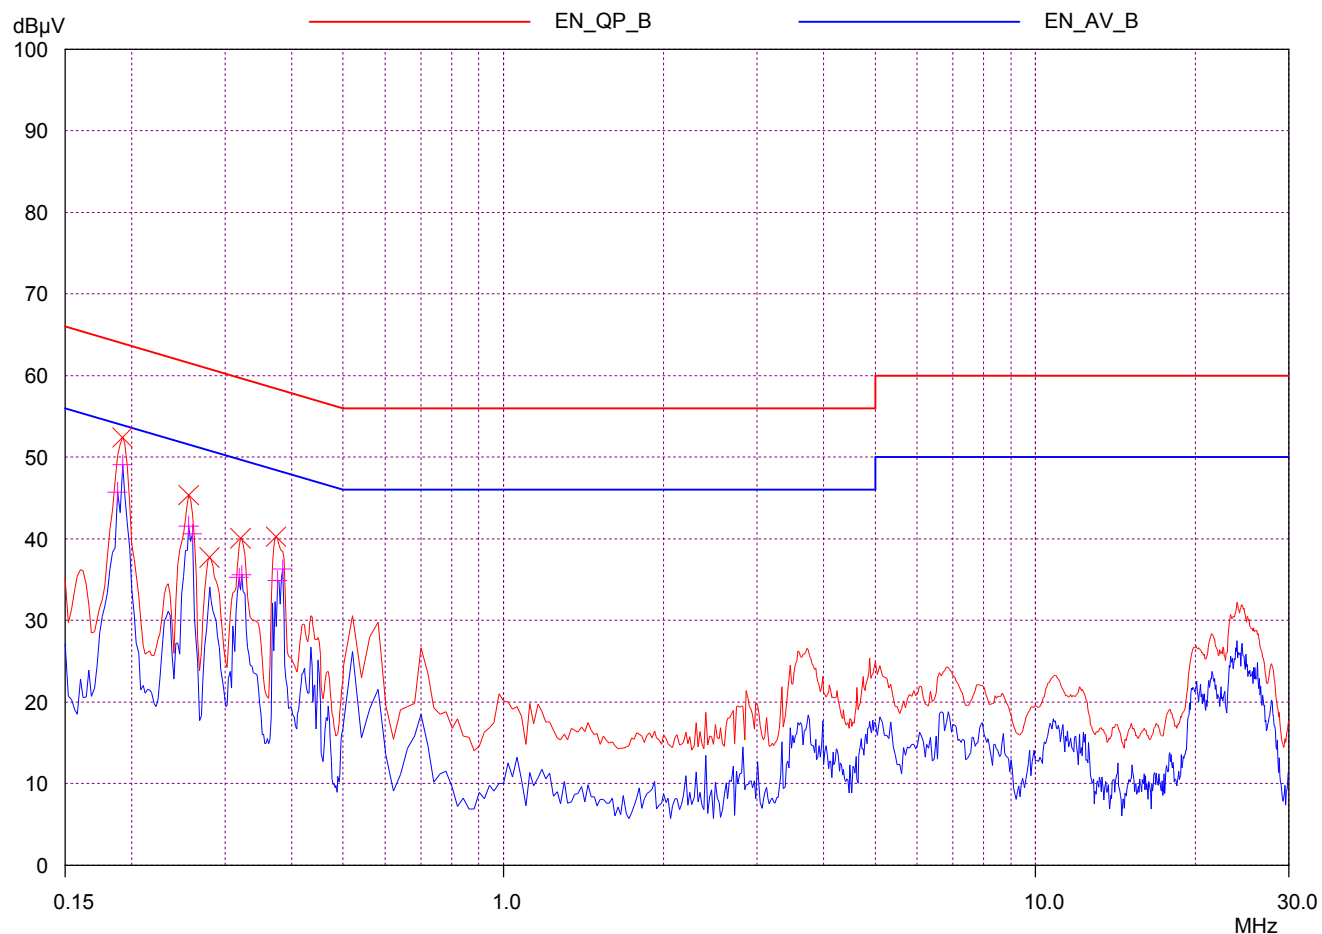

ZIPPY EMC LAB

conduction test

EUT: P2G-5600G SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (36 18 0.5 18 3)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.192	52.41	63.95	11.54	N	gnd
0.256	45.32	61.56	16.24	N	gnd
0.28	37.68	60.82	23.14	N	gnd
0.32	40.04	59.71	19.67	N	gnd
0.374	40.23	58.41	18.18	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.188	45.72	54.12	8.40	N	gnd
0.192	49.08	53.95	4.87	N	gnd
0.256	41.54	51.56	10.02	N	gnd
0.26	40.55	51.43	10.88	N	gnd
0.318	35.25	49.76	14.51	N	gnd
0.322	35.56	49.66	14.10	N	gnd
0.376	34.91	48.37	13.46	N	gnd
0.384	36.25	48.19	11.94	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission