

ZIPPY EMC LAB

conduction test


EUT: RHH-6400P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (19 20 0.8 1 14 2)
 L110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

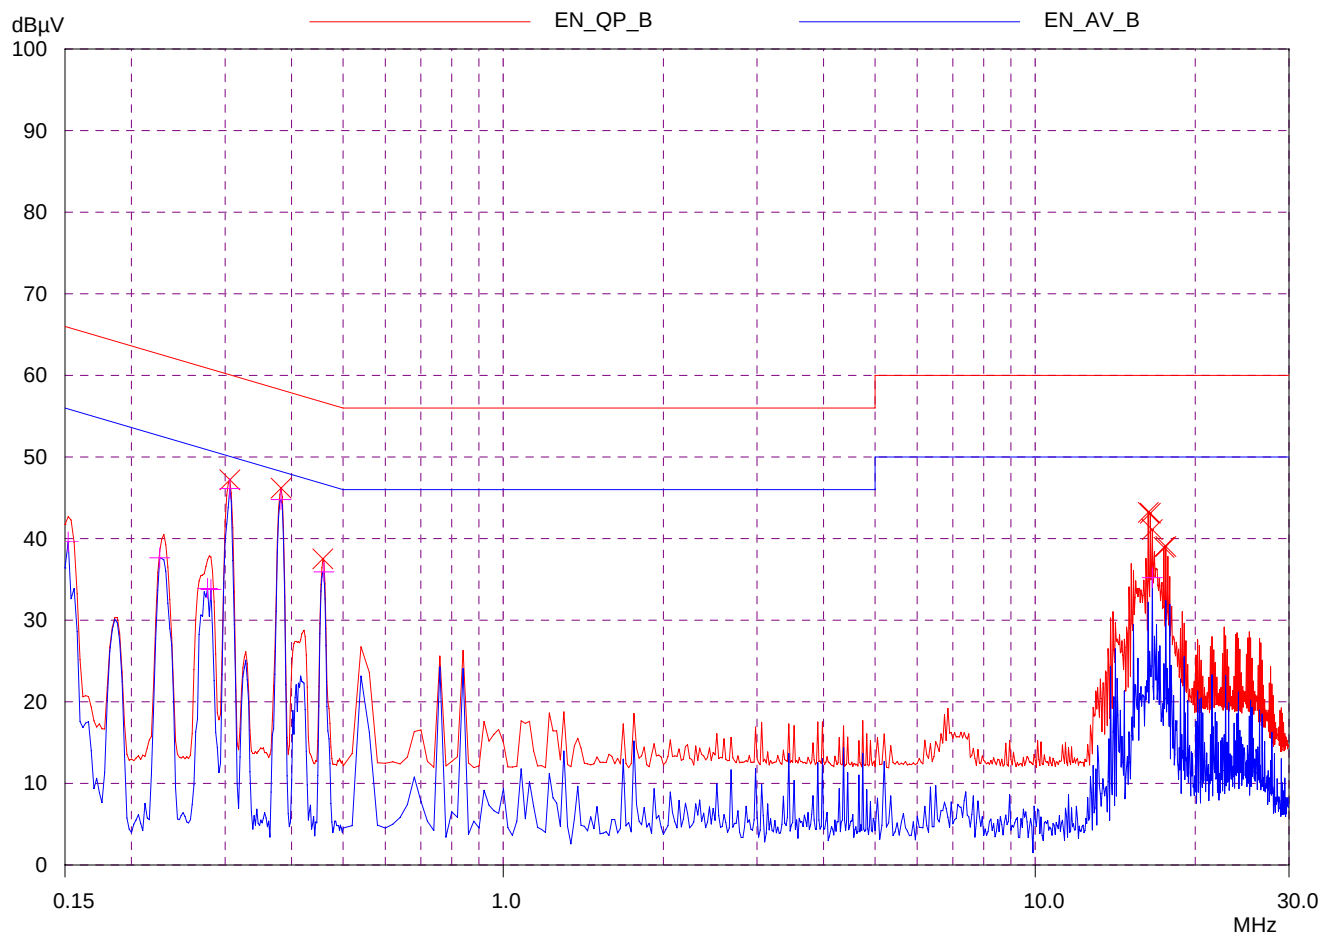

ZIPPY EMC LAB

conduction test

EUT: RHH-6400P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (19 20 0.8 1 14 2)
 L110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -	PE -
0.306	47.20	60.08	12.88	N	gnd
0.382	46.19	58.24	12.05	N	gnd
0.458	37.52	56.73	19.21	N	gnd
16.3	43.21	60.00	16.79	N	gnd
16.45	43.11	60.00	16.89	N	gnd
16.6	41.11	60.00	18.89	N	gnd
17.45	38.93	60.00	21.07	N	gnd
17.6	39.03	60.00	20.97	N	gnd

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -	PE -
0.152	39.60	55.89	16.29	N	gnd
0.226	37.64	52.60	14.96	N	gnd
0.278	33.89	50.88	16.99	N	gnd
0.282	33.76	50.76	17.00	N	gnd
0.306	46.14	50.08	3.94	N	gnd
0.382	44.79	48.24	3.45	N	gnd
0.46	35.91	46.69	10.78	N	gnd
16.6	35.21	50.00	14.79	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test


EUT: RHH-6400P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (19 20 0.8 1 14 2)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

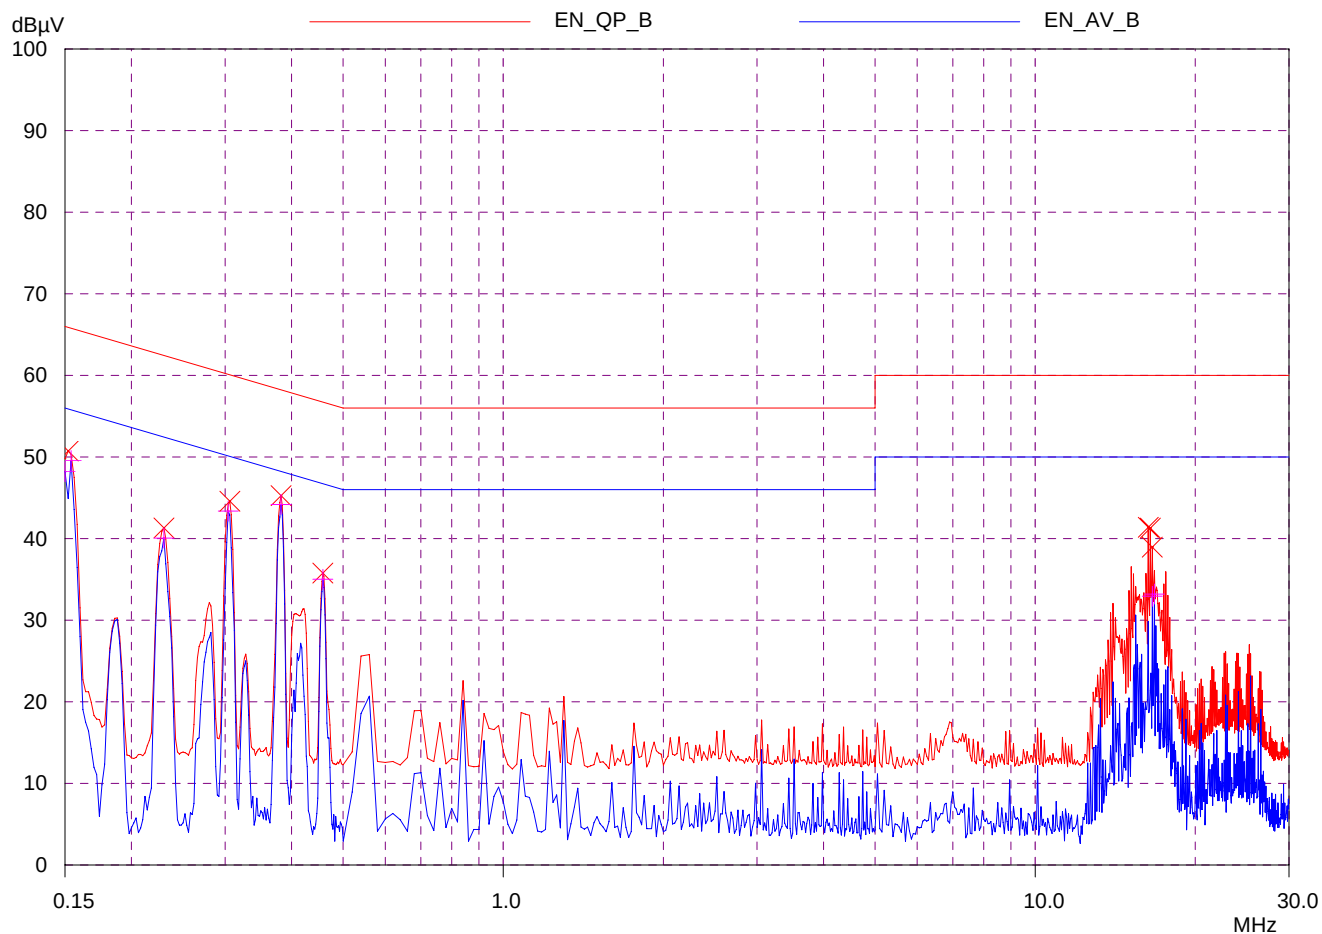

ZIPPY EMC LAB

conduction test

EUT: RHH-6400P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (19 20 0.8 1 14 2)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -	PE -
0.152	50.73	65.89	15.16	N	gnd
0.23	41.31	62.45	21.14	N	gnd
0.306	44.58	60.08	15.50	N	gnd
0.382	45.26	58.24	12.98	N	gnd
0.458	35.79	56.73	20.94	N	gnd
16.3	41.39	60.00	18.61	N	gnd
16.45	41.29	60.00	18.71	N	gnd
16.6	38.95	60.00	21.05	N	gnd

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB	Phase -	PE -
0.15	48.20	56.00	7.80	N	gnd
0.154	49.56	55.78	6.22	N	gnd
0.23	40.07	52.45	12.38	N	gnd
0.304	43.37	50.13	6.76	N	gnd
0.382	44.18	48.24	4.06	N	gnd
0.458	35.01	46.73	11.72	N	gnd
16.6	32.94	50.00	17.06	N	gnd
16.75	33.21	50.00	16.79	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission