

ZIPPY EMC LAB


conduction test

EUT: PSS-2A00V SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class A
Comment: Load Condition (82 4)
L110V

Scan Settings			(3 Ranges)			Receiver Settings			
Frequencies									
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB	
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB	
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB	

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

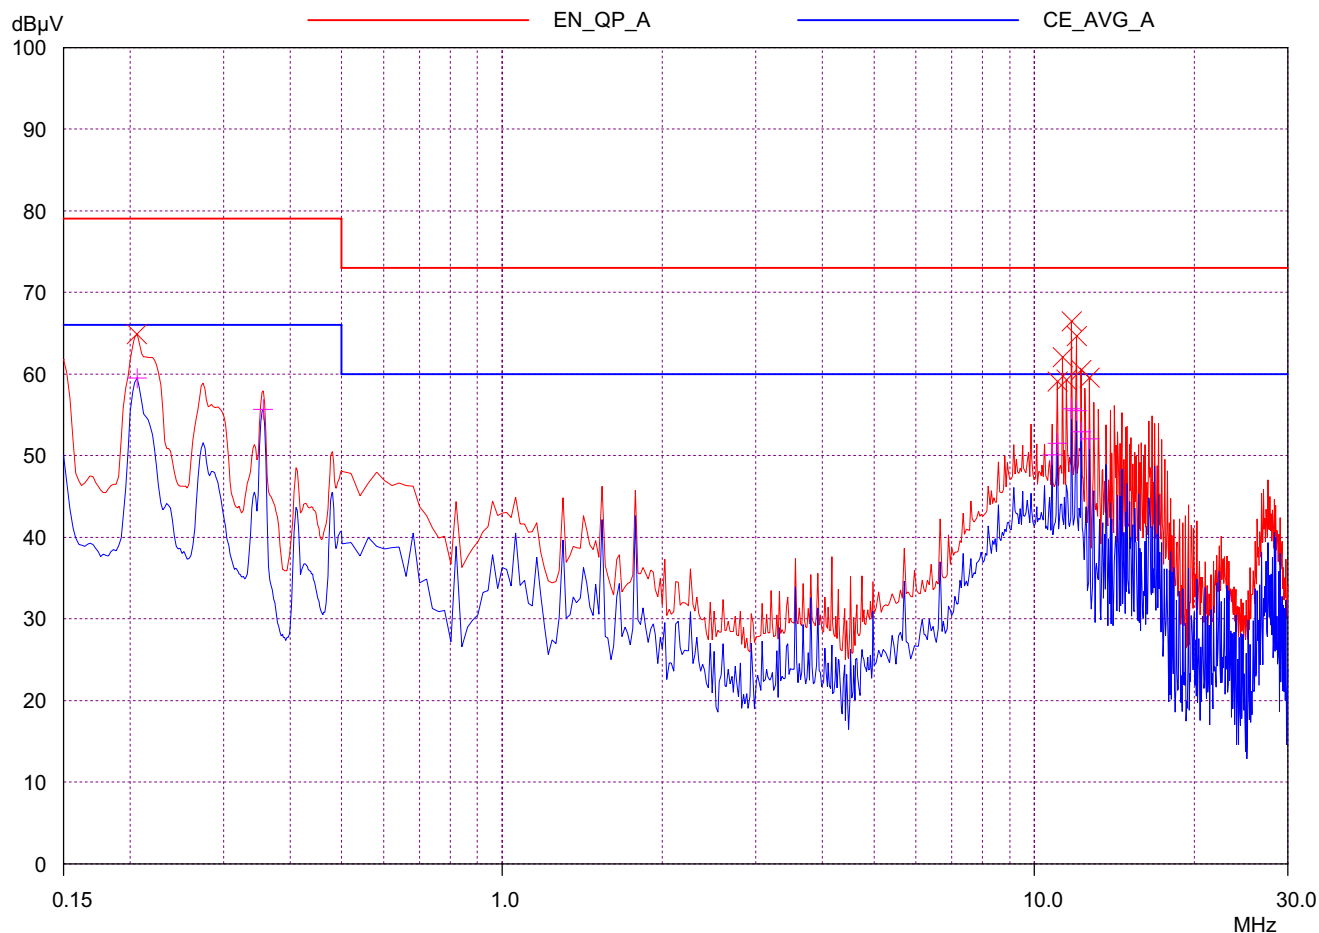

ZIPPY EMC LAB

conduction test

EUT: PSS-2A00V SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (82 4)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.206	64.83	79.00	14.17	N	gnd
11.05	59.08	73.00	13.92	N	gnd
11.3	62.05	73.00	10.95	N	gnd
11.5	59.25	73.00	13.75	N	gnd
11.75	66.40	73.00	6.60	N	gnd
12.0	64.63	73.00	8.37	N	gnd
12.25	60.46	73.00	12.54	N	gnd
12.7	59.55	73.00	13.45	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.206	59.47	66.00	6.53	N	gnd
0.356	55.65	66.00	10.35	N	gnd
10.8	50.07	60.00	9.93	N	gnd
11.05	51.52	60.00	8.48	N	gnd
11.75	55.72	60.00	4.28	N	gnd
12.0	55.45	60.00	4.55	N	gnd
12.25	52.94	60.00	7.06	N	gnd
12.7	52.05	60.00	7.95	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test


EUT: PSS-2A00V SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class A
Comment: Load Condition (82 4)
N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

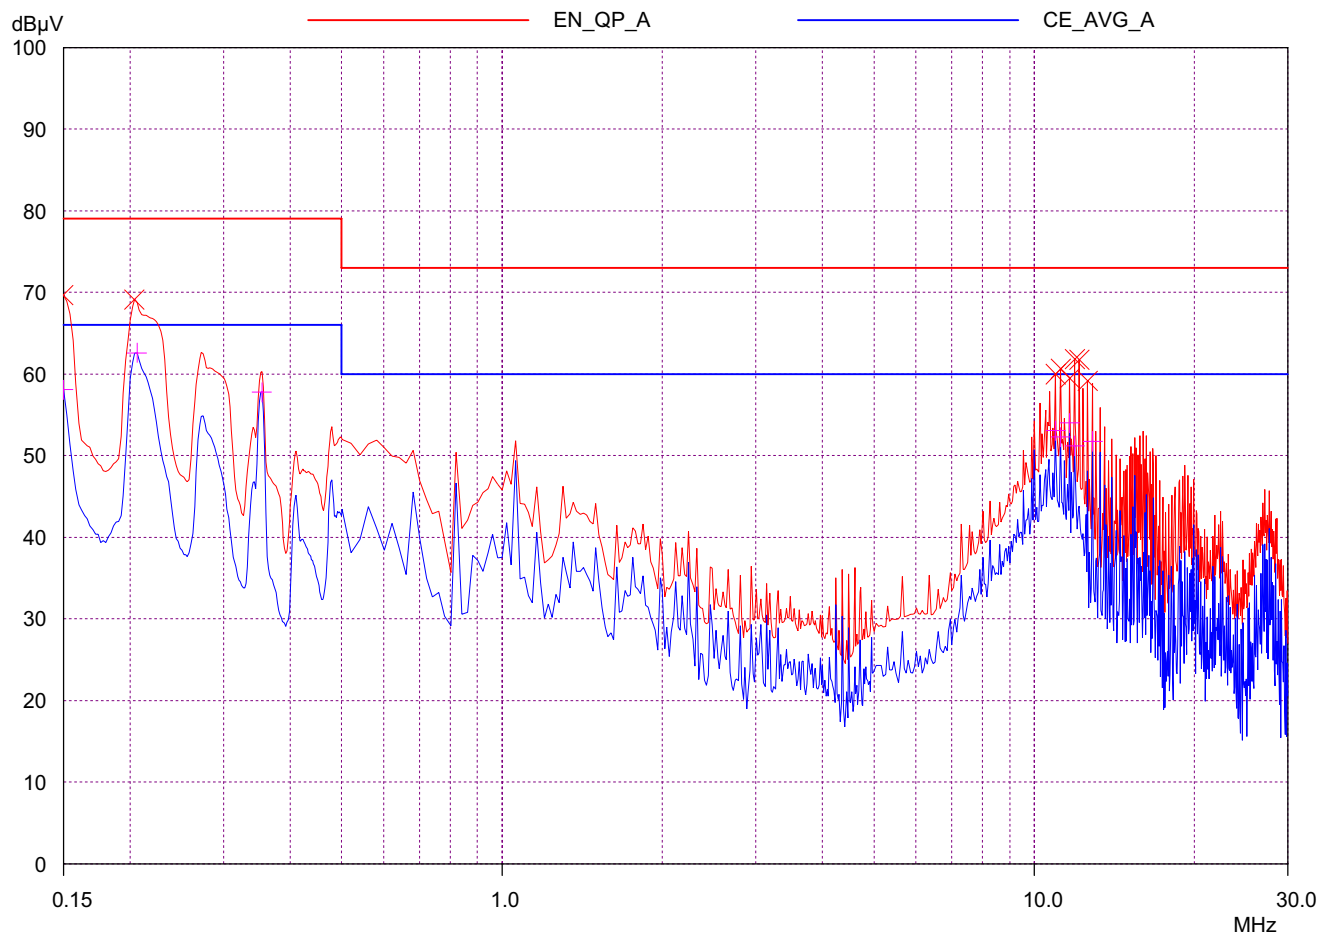

ZIPPY EMC LAB

conduction test

EUT: PSS-2A00V SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition (82 4)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	50msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.15	69.64	79.00	9.36	N	gnd
0.204	69.12	79.00	9.88	N	gnd
10.95	59.97	73.00	13.03	N	gnd
11.2	60.62	73.00	12.38	N	gnd
11.65	59.46	73.00	13.54	N	gnd
11.9	61.78	73.00	11.22	N	gnd
12.15	61.73	73.00	11.27	N	gnd
12.6	59.12	73.00	13.88	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.15	58.05	66.00	7.95	N	gnd
0.206	62.58	66.00	3.42	N	gnd
0.354	57.74	66.00	8.26	N	gnd
10.95	53.02	60.00	6.98	N	gnd
11.2	52.25	60.00	7.75	N	gnd
11.65	53.99	60.00	6.01	N	gnd
11.9	51.18	60.00	8.82	N	gnd
12.85	51.73	60.00	8.27	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission