

ZIPPY EMC LAB


conduction test

EUT: R1T2-5120V0H SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class B
Comment: Load Condition (5 5 0.3 5 3)
L110V

Scan Settings			(3 Ranges)						Receiver Settings		
Frequencies											
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge			
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB			
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB			
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB			

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

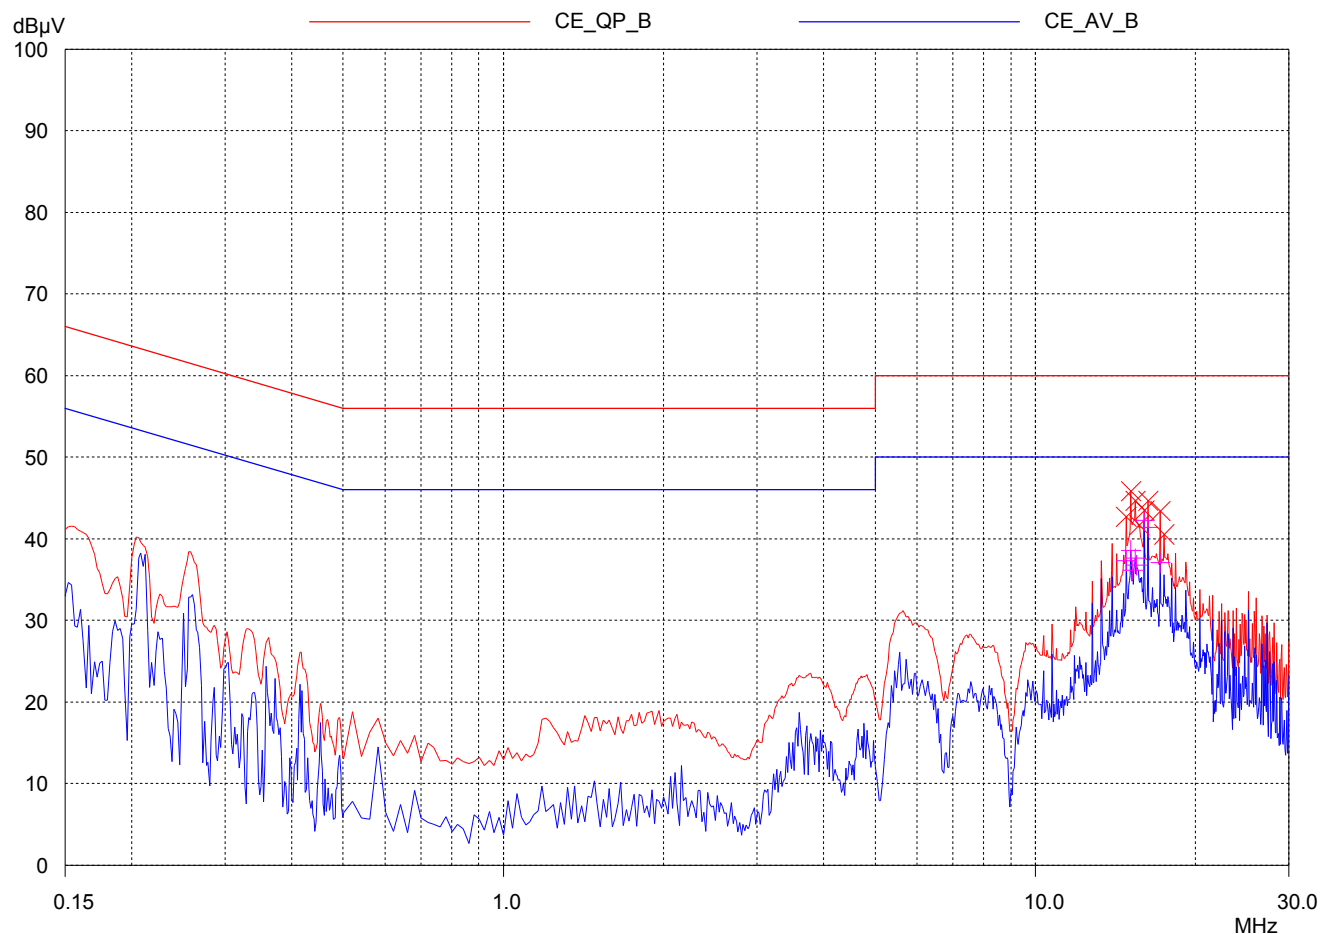

ZIPPY EMC LAB

conduction test

EUT: R1T2-5120V0H SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (5 5 0.3 5 3)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
14.84	42.70	60.00	17.30	N	gnd
15.12	45.82	60.00	14.18	N	gnd
15.4	44.62	60.00	15.38	N	gnd
15.68	41.65	60.00	18.35	N	gnd
16.0	43.45	60.00	16.55	N	gnd
16.28	44.64	60.00	15.36	N	gnd
17.16	43.38	60.00	16.62	N	gnd
17.44	40.51	60.00	19.49	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
14.8	37.30	50.00	12.70	N	gnd
15.12	38.57	50.00	11.43	N	gnd
15.24	36.12	50.00	13.88	N	gnd
15.4	37.59	50.00	12.41	N	gnd
15.48	36.75	50.00	13.25	N	gnd
16.0	42.23	50.00	7.77	N	gnd
16.28	41.37	50.00	8.63	N	gnd
17.16	37.02	50.00	12.98	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test


EUT: R1T2-5120V0H SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (5 5 0.3 5 3)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

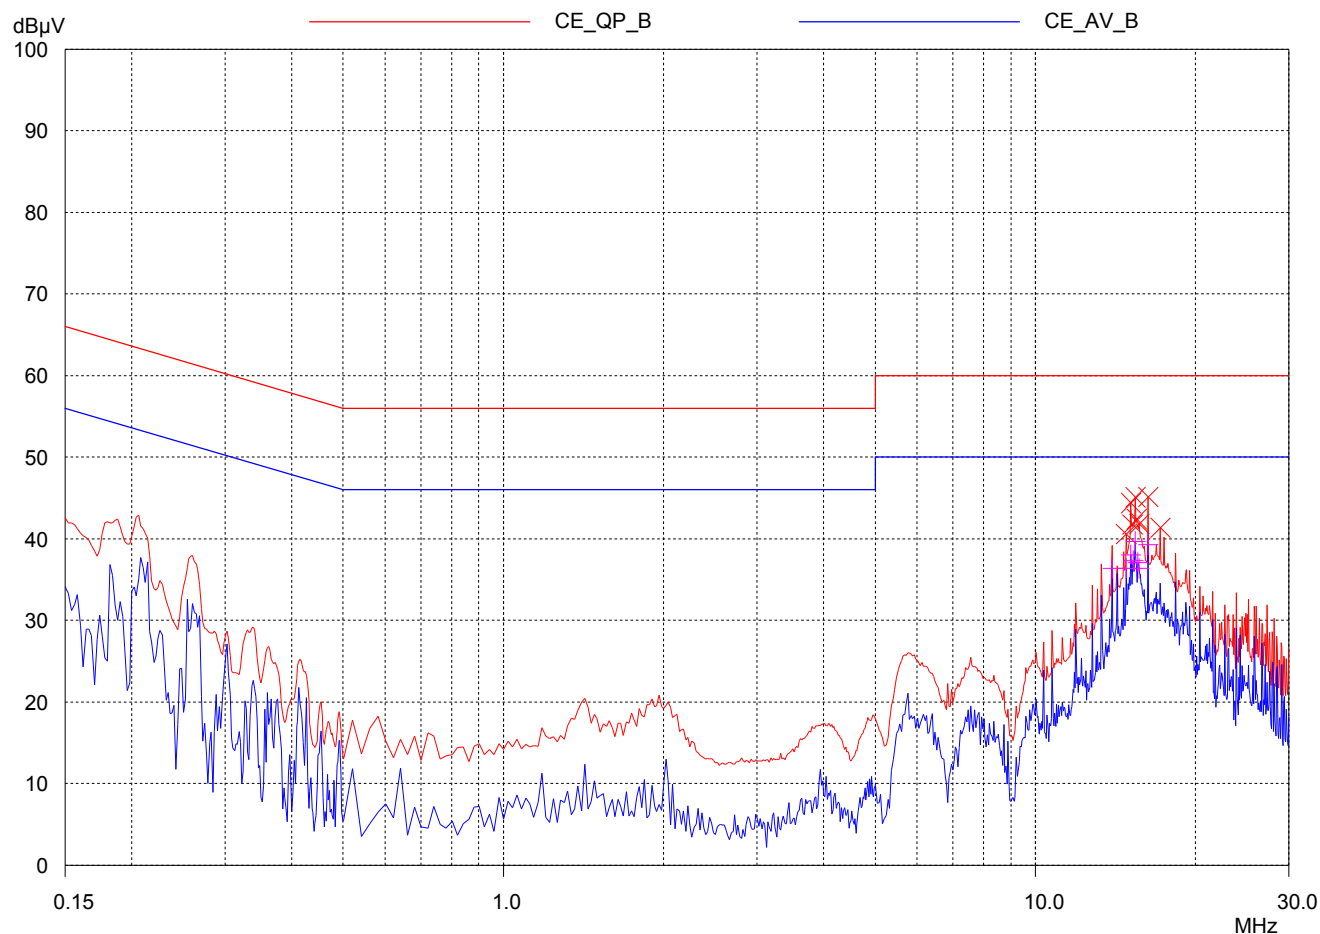

ZIPPY EMC LAB

conduction test

EUT: R1T2-5120V0H SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class B
 Comment: Load Condition (5 5 0.3 5 3)
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
14.8	40.57	60.00	19.43	N	gnd
15.12	44.37	60.00	15.63	N	gnd
15.24	41.70	60.00	18.30	N	gnd
15.4	45.06	60.00	14.94	N	gnd
15.48	42.40	60.00	17.60	N	gnd
15.68	41.81	60.00	18.19	N	gnd
16.28	45.08	60.00	14.92	N	gnd
17.16	41.33	60.00	18.67	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
13.96	36.34	50.00	13.66	N	gnd
14.8	36.37	50.00	13.63	N	gnd
15.12	38.02	50.00	11.98	N	gnd
15.28	37.32	50.00	12.68	N	gnd
15.4	39.64	50.00	10.36	N	gnd
15.56	37.07	50.00	12.93	N	gnd
15.68	36.35	50.00	13.65	N	gnd
16.28	39.27	50.00	10.73	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission