

ZIPPY EMC LAB

26 Sep 2001 11:37


conduction test

EUT: RHD-6400P SPS (1 unit) Red
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition(13 30 0.8 1 20 2)
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

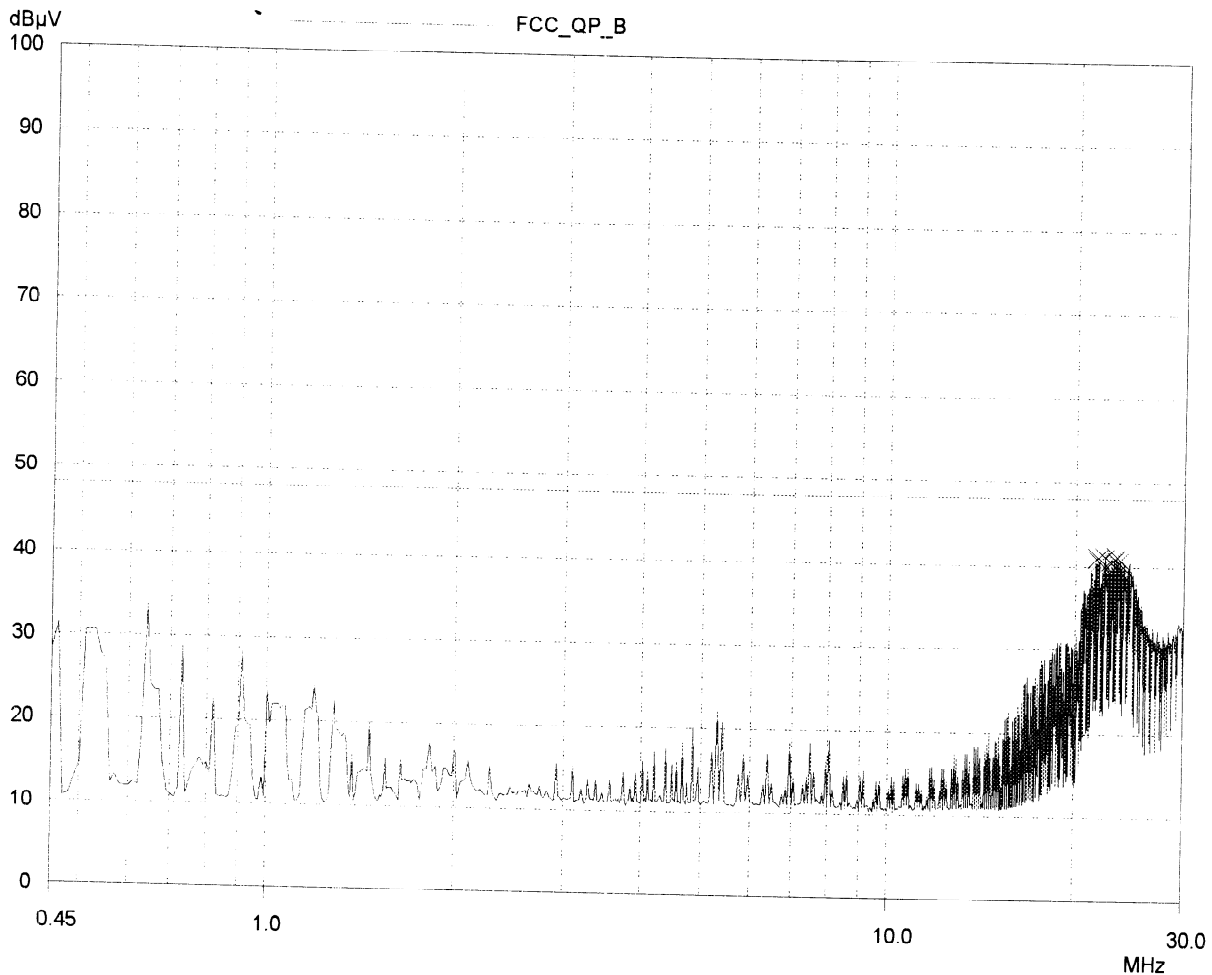

ZIPPY EMC LAB

26 Sep 2001 11:37

conduction test

EUT: RHD-6400P SPS (1 unit) Red
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition(13 30 0.8 1 20 2)
 L110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -	PE -
21.7	41.08	48.00	6.92	N	gnd
21.8	40.60	48.00	7.40	N	gnd
22.25	41.15	48.00	6.85	N	gnd
22.8	40.81	48.00	7.19	N	gnd
23.05	40.81	48.00	7.19	N	gnd
23.25	41.22	48.00	6.78	N	gnd
23.35	40.54	48.00	7.46	N	gnd
23.6	40.76	48.00	7.24	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

26 Sep 2001 11:25

conduction test


EUT: RHD-6400P SPS (1 unit) Red
Manuf: ZIPPY TECH CO. LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC -- Class B
Comment: Load Condition(13 30 0.8 1 20 2)
N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

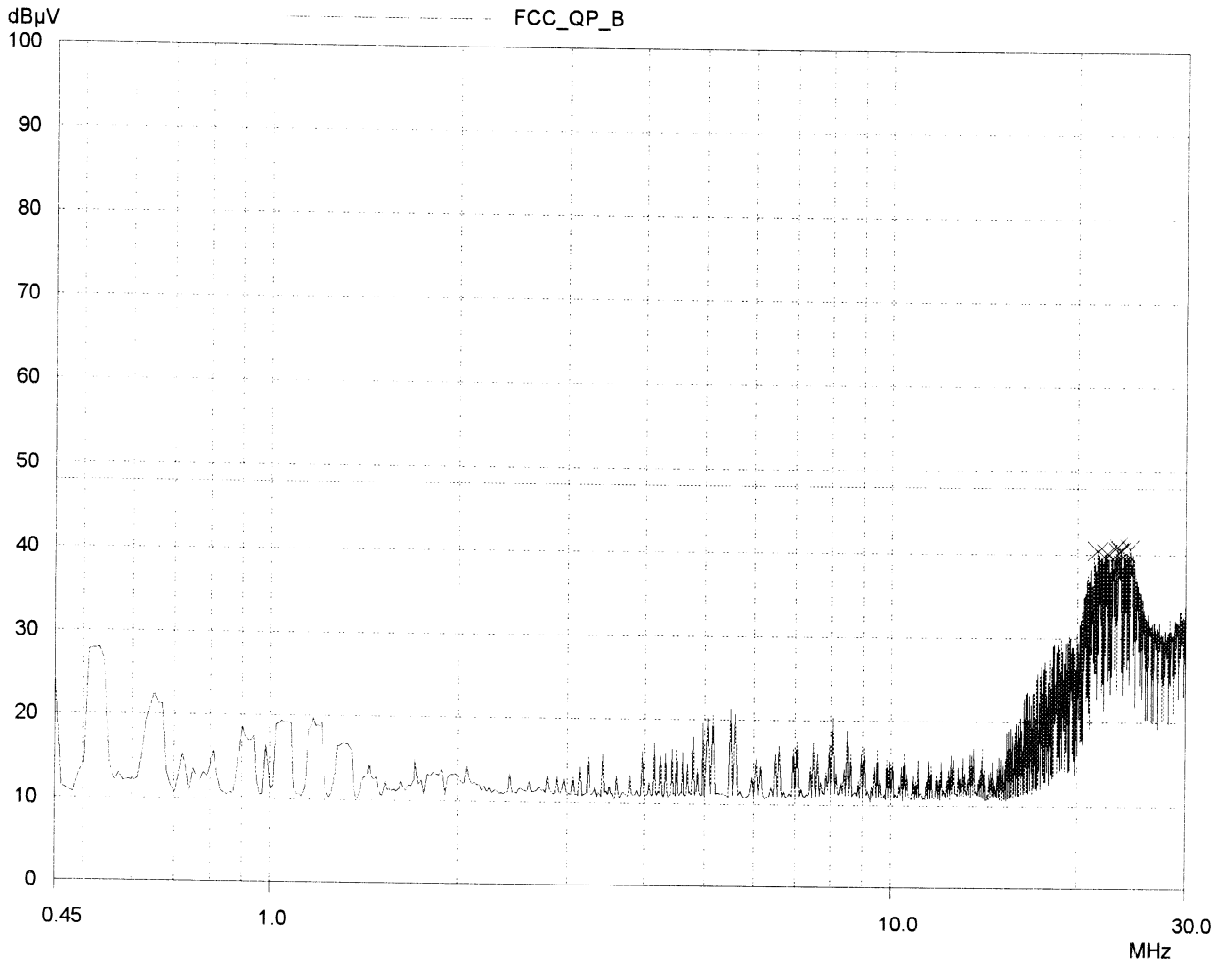

ZIPPY EMC LAB

26 Sep 2001 11:25

conduction test

EUT: RHD-6400P SPS (1 unit) Red
 Manuf: ZIPPY TECH CO.,LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC -- Class B
 Comment: Load Condition(13 30 0.8 1 20 2)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450kHz	1.705MHz	10kHz	10kHz	QP	1msec	Auto	OFF	60dB
1.705MHz	5MHz	20kHz	10kHz	QP	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	2	450kHz	30MHz	FCCB

Prescan Measurement: Detector: X QP
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB	Phase -	PE -
21.55	40.48	48.00	7.52	N	gnd
22.35	40.14	48.00	7.86	N	gnd
23.2	41.04	48.00	6.96	N	gnd
23.3	40.30	48.00	7.70	N	gnd
23.45	40.74	48.00	7.26	N	gnd
23.55	40.52	48.00	7.48	N	gnd
24.0	40.12	48.00	7.88	N	gnd
24.3	40.81	48.00	7.19	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission