

ZIPPY EMC LAB


conduction test

EUT: R1V-2275V SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class A
Comment: Load Condition
L110V

Scan Settings			(3 Ranges)						Receiver Settings			
Frequencies												
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge				
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB				
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB				
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB				

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

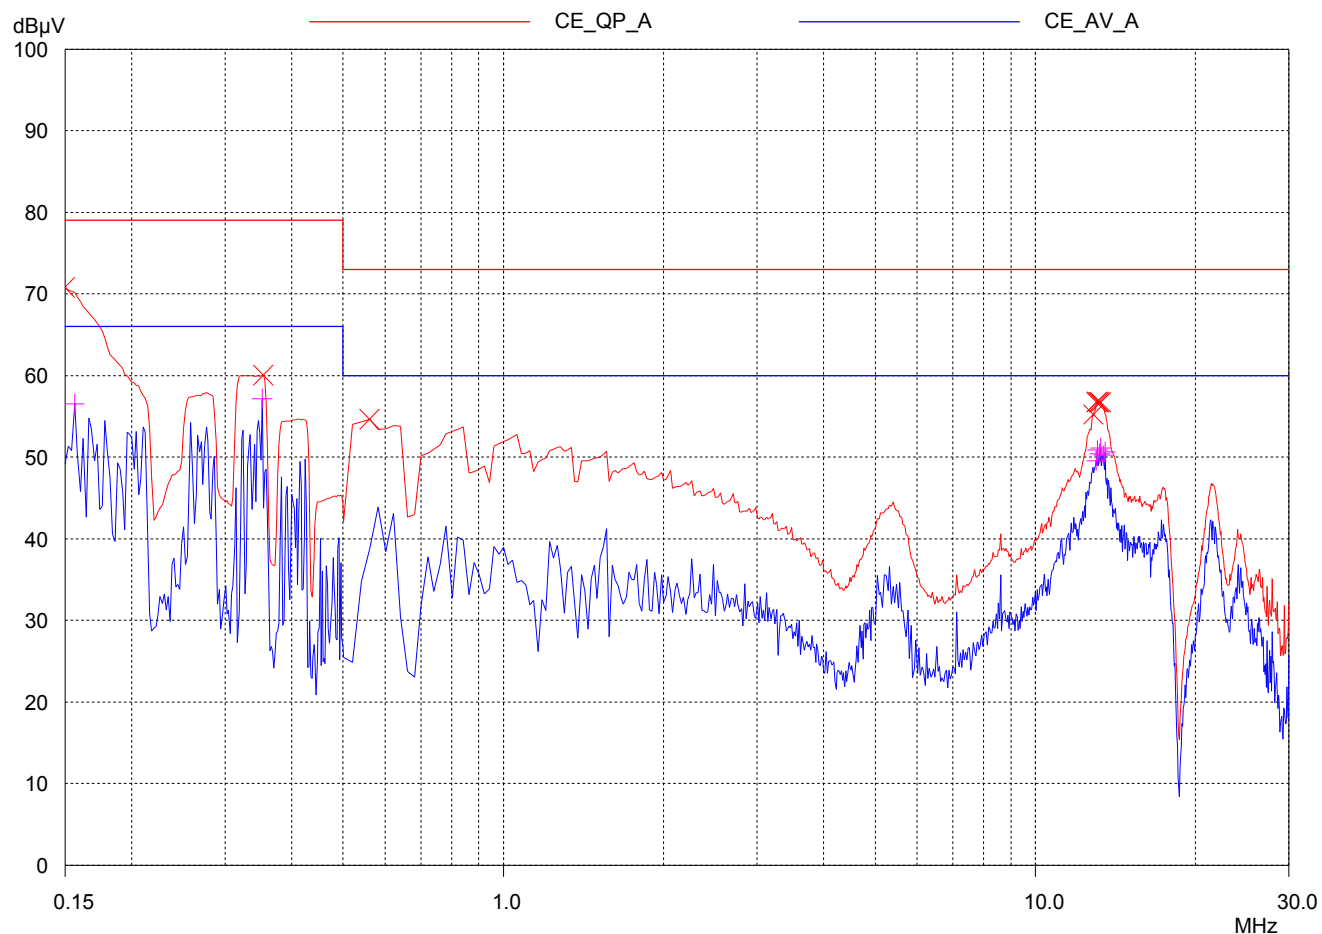

ZIPPY EMC LAB

conduction test

EUT: R1V-2275V SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition
 L110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.15	70.78	79.00	8.22	N	gnd
0.354	60.04	79.00	18.96	N	gnd
0.56	54.63	73.00	18.37	N	gnd
12.84	55.22	73.00	17.78	N	gnd
13.0	56.71	73.00	16.29	N	gnd
13.08	56.79	73.00	16.21	N	gnd
13.16	56.73	73.00	16.27	N	gnd
13.28	56.72	73.00	16.28	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.156	56.51	66.00	9.49	N	gnd
0.352	57.15	66.00	8.85	N	gnd
13.0	49.55	60.00	10.45	N	gnd
13.08	50.83	60.00	9.17	N	gnd
13.2	50.42	60.00	9.58	N	gnd
13.28	51.11	60.00	8.89	N	gnd
13.4	50.22	60.00	9.78	N	gnd
13.52	50.62	60.00	9.38	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB


conduction test

EUT: R1V-2275V SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: FCC Part 15-- Class A
Comment: Load Condition
N110V

Scan Settings			(3 Ranges)		Receiver Settings			
Frequencies								
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

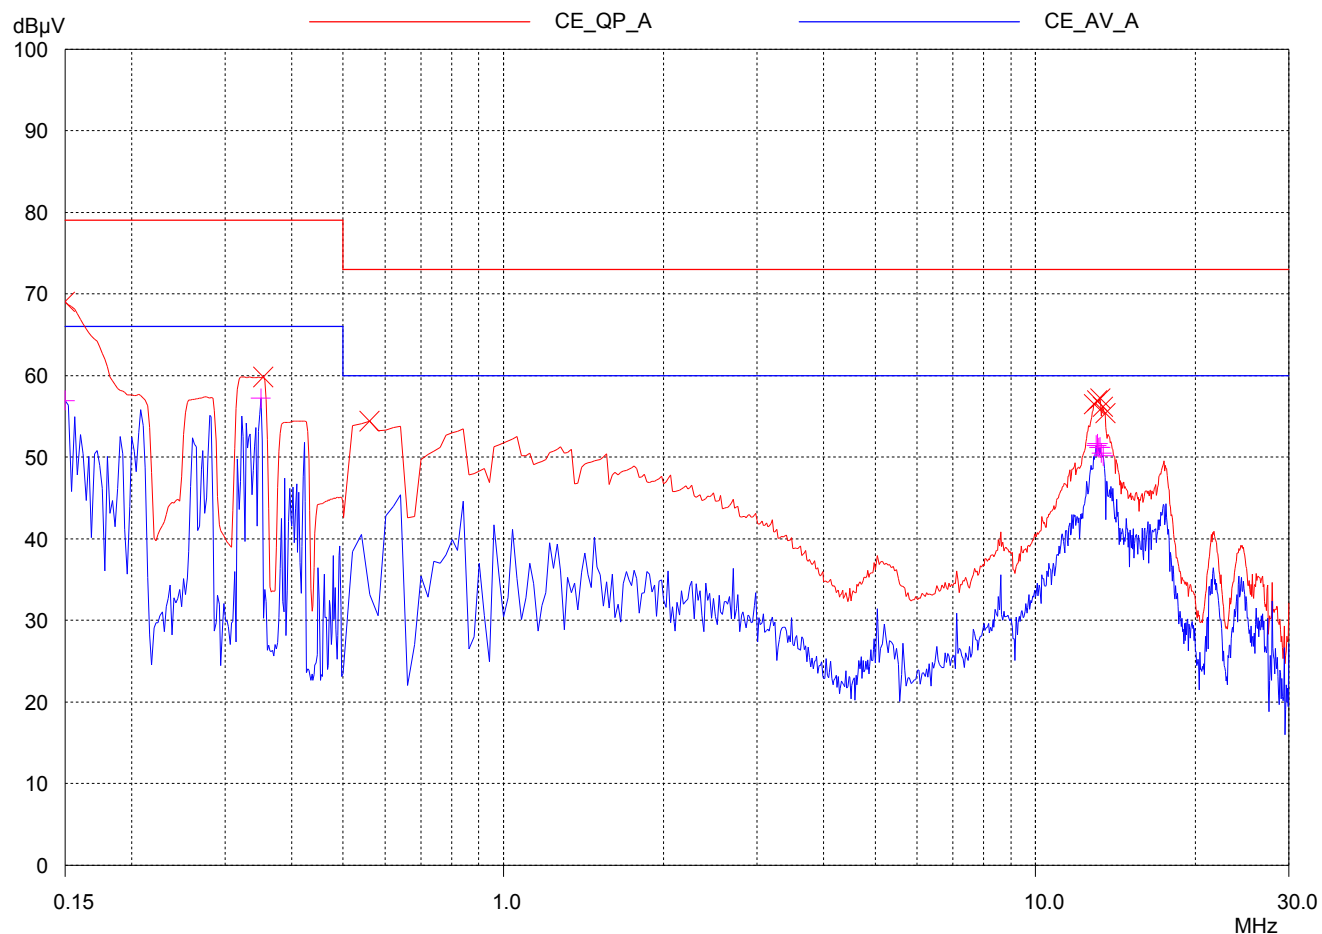

ZIPPY EMC LAB

conduction test

EUT: R1V-2275V SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: FCC Part 15-- Class A
 Comment: Load Condition
 N110V

Scan Settings		(3 Ranges)			Receiver Settings			
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	40kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.15	69.00	79.00	10.00	N	gnd
0.354	59.81	79.00	19.19	N	gnd
0.56	54.39	73.00	18.61	N	gnd
12.92	56.49	73.00	16.51	N	gnd
13.04	56.91	73.00	16.09	N	gnd
13.24	57.16	73.00	15.84	N	gnd
13.36	56.18	73.00	16.82	N	gnd
13.52	55.40	73.00	17.60	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.15	56.92	66.00	9.08	N	gnd
0.35	57.20	66.00	8.80	N	gnd
13.0	51.40	60.00	8.60	N	gnd
13.08	51.64	60.00	8.36	N	gnd
13.16	51.14	60.00	8.86	N	gnd
13.24	51.18	60.00	8.82	N	gnd
13.32	50.50	60.00	9.50	N	gnd
13.4	50.14	60.00	9.86	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission