




ZIPPY TECH CO.,LTD

ZIPPY EMC LAB

MODEL NAME : MRG-6500P TEST MODE : LINE-110V
TEST SPEC. : FCC Part 15-CLASS B LOAD CONDITION : 24 24 0.8 1 20 2.5

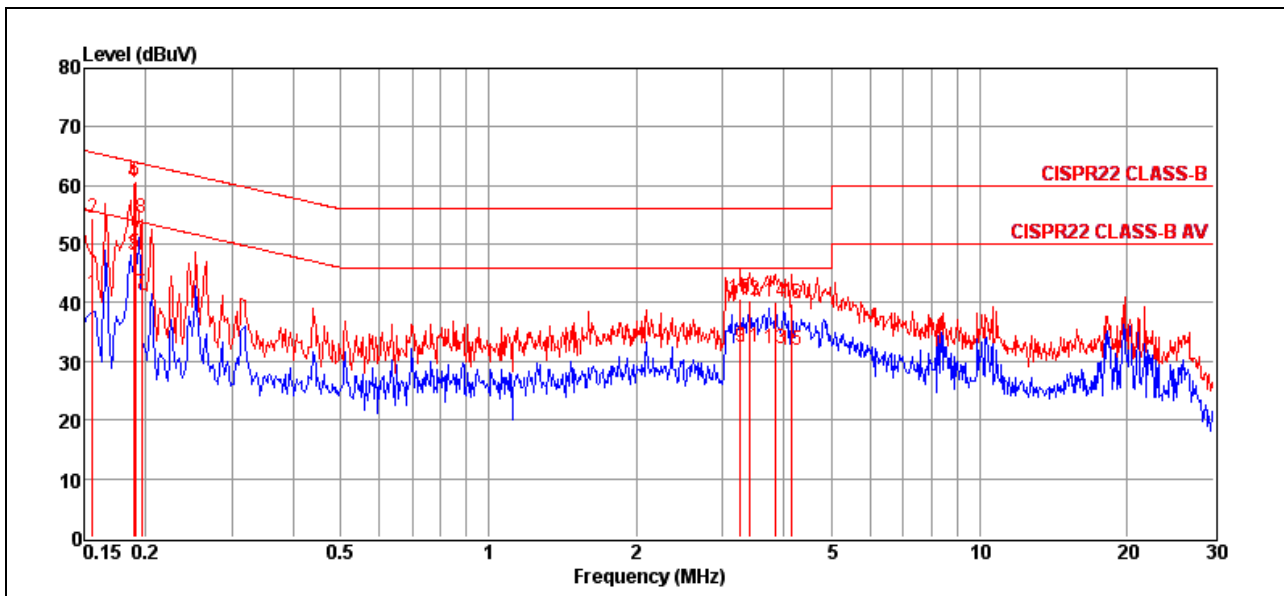


Freq	Reading	Reading	Factor	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV	QP	AV
MHz	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.16		20.32	21.12		41.44		55.66		14.22
0.16	33.36		21.12	54.48		65.66		11.18	
0.19		27.03	21.01		48.04		54.07		6.03
0.19	39.37		21.01	60.38		64.07		3.69	
0.19		27.44	21.01		48.45		54.01		5.56
0.19	39.65		21.01	60.66		64.01		3.35	
0.20		20.56	21.02		41.58		53.75		12.17
0.20	33.49		21.02	54.51		63.75		9.24	
3.26		11.94	20.52		32.46		46.00		13.54
3.26	20.20		20.52	40.72		56.00		15.28	
3.40		11.77	20.79		32.56		46.00		13.44
3.40	19.69		20.79	40.48		56.00		15.52	
3.85		10.69	21.60		32.29		46.00		13.71
3.85	18.48		21.60	40.08		56.00		15.92	
4.14		9.86	21.96		31.82		46.00		14.18
4.14	18.02		21.96	39.98		56.00		16.02	



ZIPPY TECH CO..LTD

ZIPPY EMC LAB

MODEL NAME : MRG-6500P TEST MODE : NEUTRAL-110V
TEST SPEC. : FCC Part 15-CLASS B LOAD CONDITION : 24 24 0.8 1 20 2.5

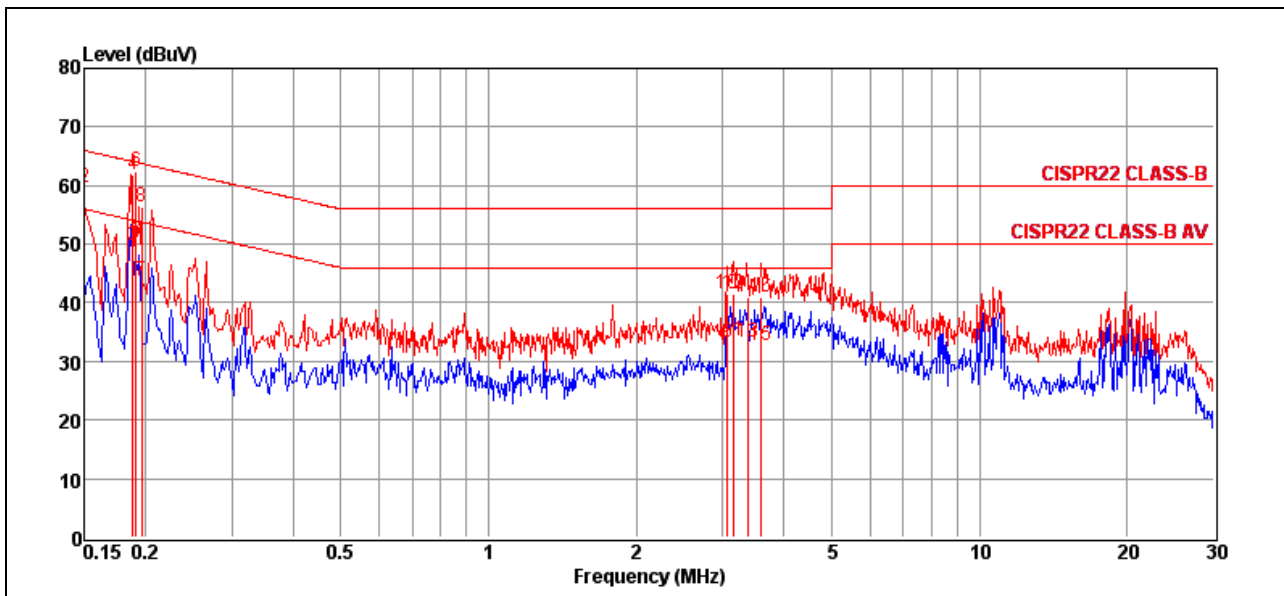

Freq	Reading	Reading	Factor	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV	QP	AV
MHz	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.15		22.35	21.94		44.29		56.00		11.71
0.15	37.67		21.94	59.61		66.00		6.39	
0.19		26.94	22.88		49.82		54.10		4.28
0.19	38.93		22.88	60.81		64.10		3.29	
0.19		27.70	22.89		50.59		53.98		3.39
0.19	39.47		22.89	60.36		63.98		3.62	
0.20		21.00	22.79		43.79		53.76		9.97
0.20	33.56		22.79	56.35		63.76		7.41	
3.07		12.21	21.11		33.32		46.00		12.68
3.07	20.45		21.11	41.56		56.00		14.44	
3.16		12.35	21.13		33.48		46.00		12.52
3.16	20.41		21.13	41.54		56.00		14.46	
3.37		12.01	21.23		33.24		46.00		12.76
3.37	19.86		21.23	41.09		56.00		14.91	
3.58		11.40	21.31		32.71		46.00		13.29
3.58	19.72		21.31	41.03		56.00		14.97	