




ZIPPY TECH CO..LTD

ZIPPY EMC LAB

MODEL NAME : BB1U-6150V TEST MODE : LINE-24V
 TEST SPEC. : FCC Part 15-CLASS A LOAD CONDITION : 5 8 0.5 8 1.1

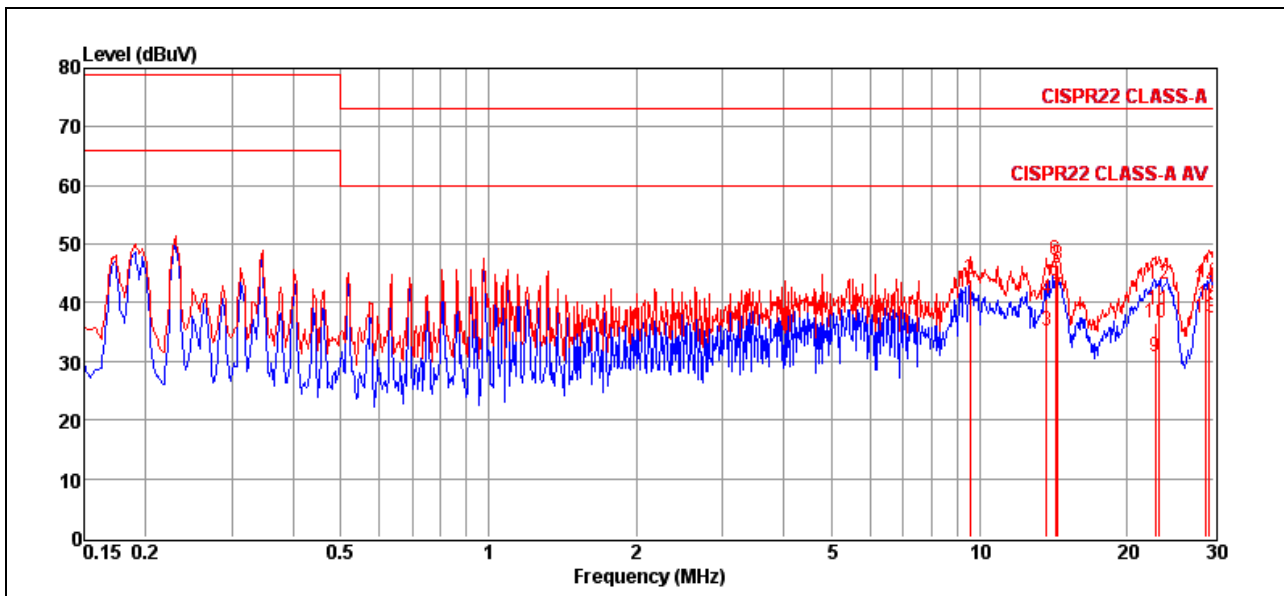

Freq	Reading	Reading	Factor	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV	QP	AV
MHz	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
9.55		23.35	19.05		42.40		60.00		17.60
9.55	25.02		19.05	44.07		73.00		28.93	
13.70		15.30	19.88		35.18		60.00		24.82
13.70	20.88		19.88	40.76		73.00		32.24	
14.28		23.70	20.08		43.78		60.00		16.22
14.28	27.16		20.08	47.24		73.00		25.76	
14.45		20.83	20.17		41.00		60.00		19.00
14.45	26.35		20.17	46.52		73.00		26.48	
22.78		10.76	20.07		30.83		60.00		29.17
22.78	16.41		20.07	36.48		73.00		36.52	
23.26		18.79	20.01		38.80		60.00		21.20
23.26	23.24		20.01	43.25		73.00		29.75	
28.90		20.37	17.11		37.48		60.00		22.52
28.90	25.44		17.11	42.55		73.00		30.45	
29.37		22.67	17.02		39.69		60.00		20.31
29.37	26.30		17.02	43.32		73.00		29.68	


Remarks : C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



ZIPPY TECH CO..LTD

ZIPPY EMC LAB

MODEL NAME : BB1U-6150V TEST MODE : NEUTRAL-24V
 TEST SPEC. : FCC Part 15-CLASS A LOAD CONDITION : 5 8 0.5 8 1.1

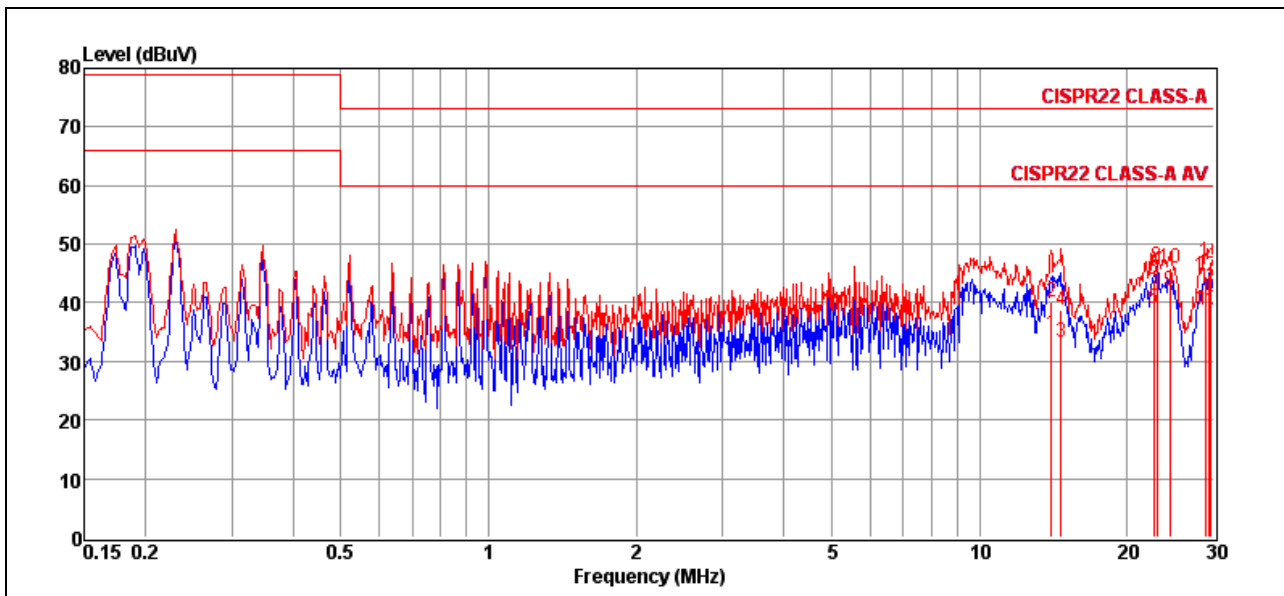

Freq	Reading	Reading	Factor	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV	QP	AV
MHz	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
14.00		14.40	20.36		34.76		60.00		25.24
14.00	19.76		20.36	40.12		73.00		32.88	
14.67		12.68	20.56		33.24		60.00		26.76
14.67	18.10		20.56	38.66		73.00		34.34	
22.66		18.65	20.49		39.14		60.00		20.86
22.66	23.62		20.49	44.11		73.00		28.89	
23.01		23.17	20.47		43.64		60.00		16.36
23.01	25.81		20.47	46.28		73.00		26.72	
24.39		21.80	20.38		42.18		60.00		17.82
24.39	25.62		20.38	46.00		73.00		27.00	
28.90		21.30	17.37		38.67		60.00		21.33
28.90	27.04		17.37	44.41		73.00		28.59	
29.22		21.42	17.26		38.68		60.00		21.32
29.22	27.65		17.26	44.91		73.00		28.09	
29.52		25.54	17.16		42.70		60.00		17.30
29.52	29.75		17.16	46.91		73.00		26.09	

Remarks : C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain