

conduction test

EUT: P2G-6510P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: EN 55022-- Class B
 Comment: Load Condition (25 25 0.8 1 18 2)
 L110V


Scan Settings

(3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	10kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

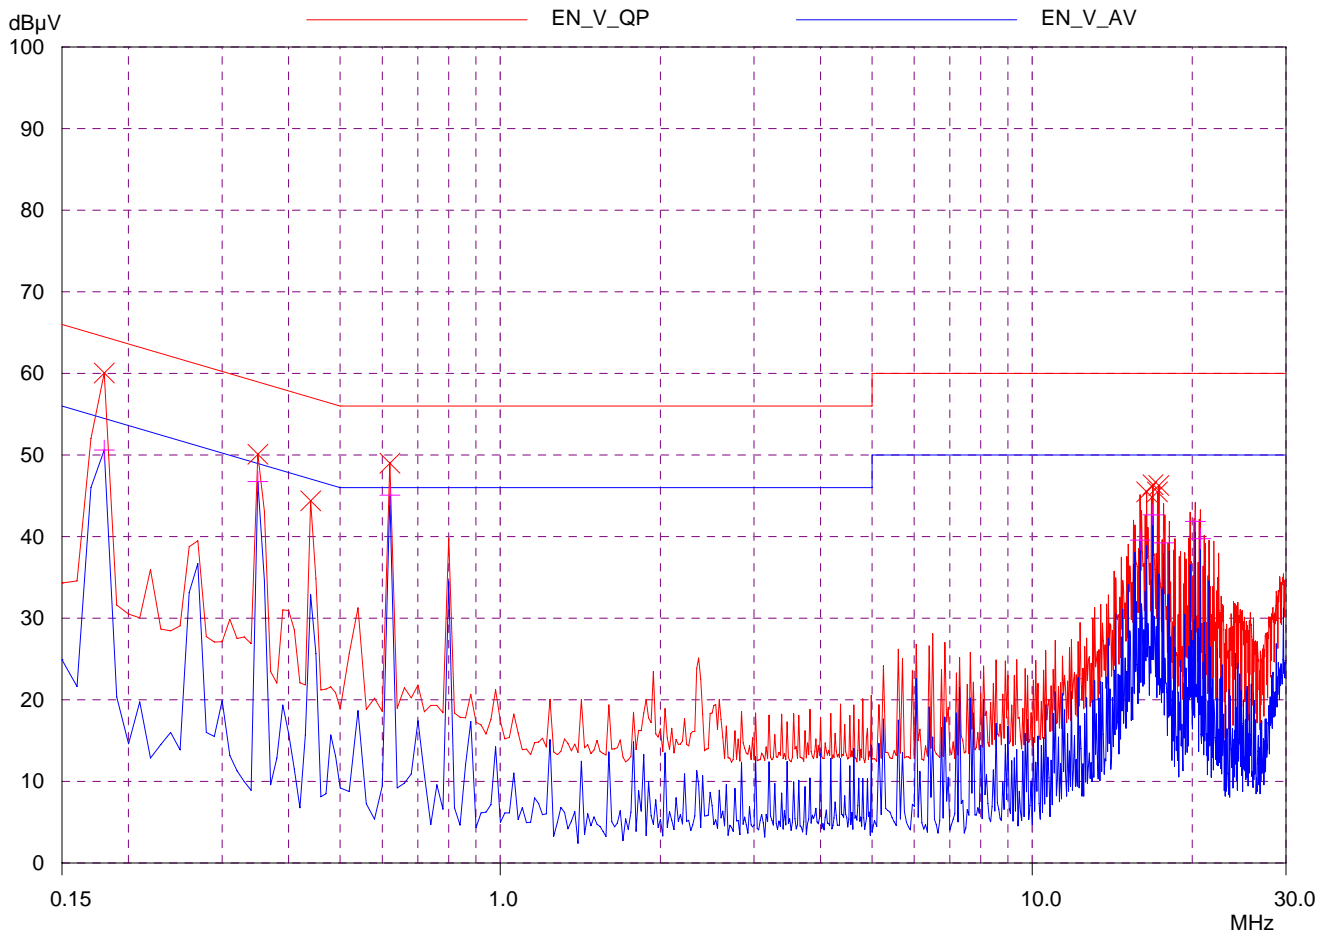

conduction test

EUT: P2G-6510P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: EN 55022-- Class B
 Comment: Load Condition (25 25 0.8 1 18 2)
 L110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	10kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.18	60.05	64.49	4.44	N	gnd
0.35	50.10	58.96	8.86	N	gnd
0.44	44.38	57.06	12.68	N	gnd
0.62	48.99	56.00	7.01	N	gnd
16.4	45.49	60.00	14.51	N	gnd
16.85	46.37	60.00	13.63	N	gnd
17.2	45.47	60.00	14.53	N	gnd
17.3	46.26	60.00	13.74	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.18	50.60	54.49	3.89	N	gnd
0.35	46.75	48.96	2.21	N	gnd
0.62	45.08	46.00	0.92	N	gnd
15.95	39.57	50.00	10.43	N	gnd
16.85	42.66	50.00	7.34	N	gnd
17.65	39.24	50.00	10.76	N	gnd
20.25	41.86	50.00	8.14	N	gnd
20.7	39.74	50.00	10.26	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

conduction test


EUT: P2G-6510P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: EN 55022-- Class B
 Comment: Load Condition (25 25 0.8 1 18 2)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	10kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

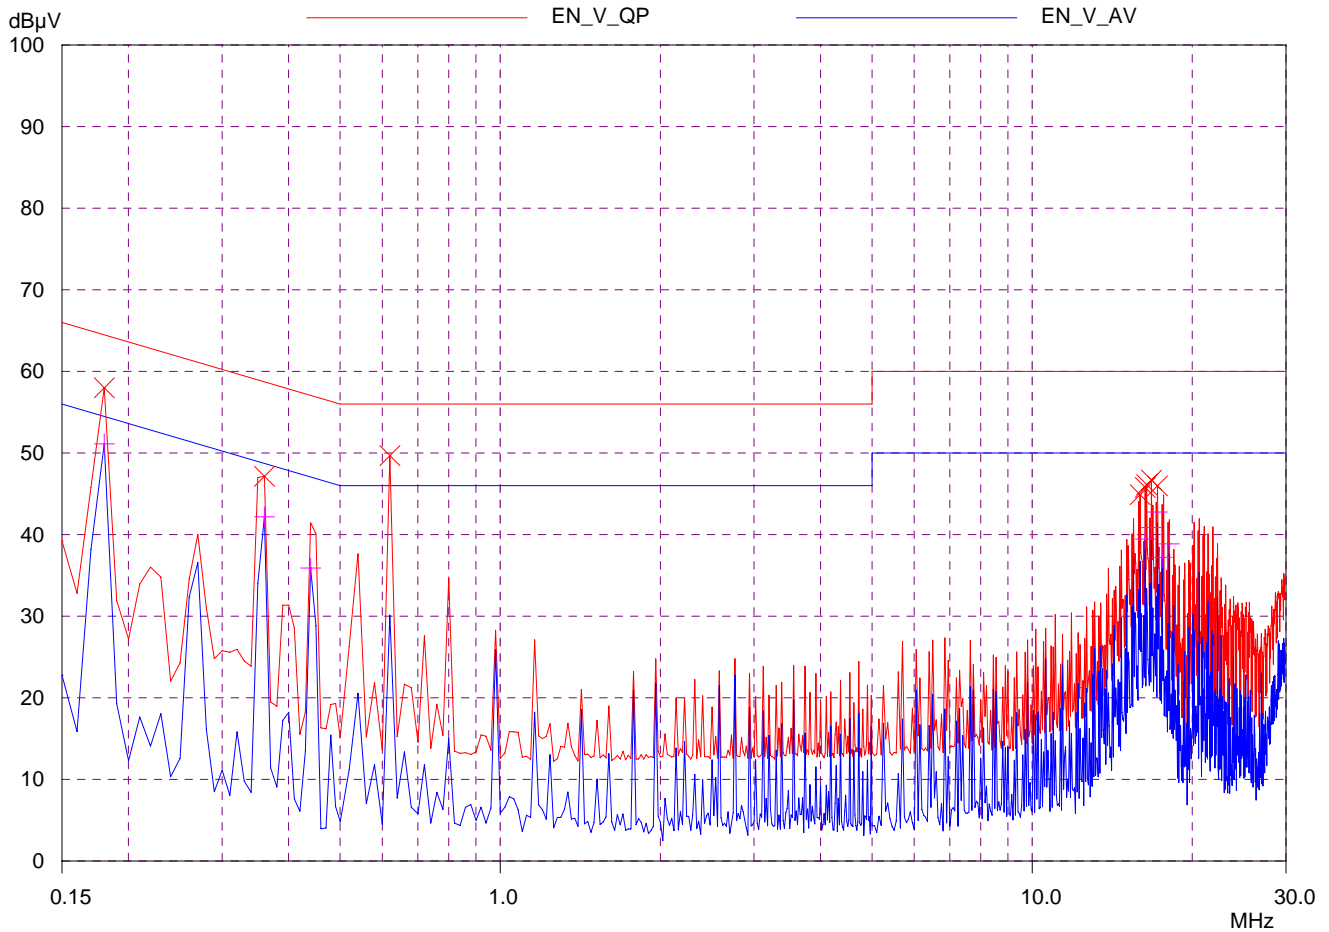

conduction test

EUT: P2G-6510P SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: EN 55022-- Class B
 Comment: Load Condition (25 25 0.8 1 18 2)
 N110V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	10kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase	PE
0.18	57.99	64.49	6.50	N	gnd
0.36	47.16	58.73	11.57	N	gnd
0.62	49.68	56.00	6.32	N	gnd
15.95	44.90	60.00	15.10	N	gnd
16.3	45.78	60.00	14.22	N	gnd
16.4	46.12	60.00	13.88	N	gnd
16.75	46.69	60.00	13.31	N	gnd
17.2	45.96	60.00	14.04	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase	PE
0.18	51.12	54.49	3.37	N	gnd
0.36	42.17	48.73	6.56	N	gnd
0.44	35.90	47.06	11.16	N	gnd
16.3	39.44	50.00	10.56	N	gnd
16.75	40.86	50.00	9.14	N	gnd
17.2	42.76	50.00	7.24	N	gnd
17.55	37.23	50.00	12.77	N	gnd
18.1	38.88	50.00	11.12	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission