

Declaration of Conformity

We, Manufacturer

ZIPPY TECHNOLOGY CORP.
10F, No.50, MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C.

declare that the product
(description of the apparatus, system, installation to which it refers)

SWITCHING POWER SUPPLY

MQ1G-1060V-12

is in conformity with
(reference to the specification under which conformity is declared)
in accordance with 2004/108/EC-EMC Directive

■ EN 55011 : 2007

Industrial, scientific and medical
radio-frequency equipment
-Radio disturbance characteristics
-Limits and methods of measurement

■ EN 60601-1-2 : 2007

Medical electrical equipment
-Immunity characteristics
-Limits and methods of measurement

■ EN 61000-4-2 : 2009 Criteria B

Electrostatic discharge
requirements "ESD"

■ EN 61000-4-3 : 2006+A1/2008 Criteria A

Radiated, radio frequency
electromagnetic field

■ EN 61000-4-4 : 2004 Criteria B

Electrical fast transient
requirements "EFT"

■ EN 61000-4-5 : 2006 Criteria B

Surge Immunity
requirements

■ EN 61000-4-6 : 2007 Criteria A

Conducted Immunity

■ EN 61000-4-8 : 1993+A1/2001 Criteria A

Power Frequency Magnetic
Field Immunity

■ EN 61000-4-11 : 2004

Dip Criteria B
Interruptions Criteria C
Voltage Dip, interruptions
Immunity requirements

■ EN 61000-3-2 : 2006

Harmonic current
requirements

■ EN 61000-3-3 : 2008

Voltage fluctuations
and flicker
requirements

Manufacturer

Date : OCT,13,2010

Signature: Melvin Lin

Name: ZIPPY

Test-Lab

Date : OCT,13,2010

Signature: Karen

Name: ZIPPY

APPLICATION FOR CERTIFICATION
ON Behalf Of
ZIPPY TECHNOLOGY CORP.
SWITCHING POWER SUPPLY

Model# : **MQ1G-1060V-12**

FCCID:N/A

PREPARED FOR :

ZIPPY TECHNOLOGY CORP.
10F,No.50,MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C

REPORT BY :

ZIPPY TECHNOLOGY CORP.
10F,No.50,MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C
TEL : (02)2918-8512
FAX : (02)2913-4969

TABLE OF CONTENTS

Description	Page
1. Test Report Certification.....	5
2. General Information.....	6
2.1 Production Description.....	6
2.2 Tested System Details.....	7
2.2.1 Resistor Load.....	7
2.3 Test Methodology.....	7
2.4 Test Facility.....	7
3. Electronic-Magnetic Interference Test.....	8
3.1. Conducted Power Line Test.....	8
3.1.1 Test Equipments.....	8
3.1.2 Block Diagram of Test Setup.....	8
3.1.3 Conducted Powerline Emission Limit.....	9
3.1.4 EUT Configuration on Measurement.....	9
3.1.5 EUT Exercise Software.....	9
3.1.6 Conducted Emission Data.....	9
3.2. Radiation Emission Test	11
3.2.1 Test Equipment	11
3.2.2 Test Setup	11
3.2.3 Radiated Emission Limited	12
3.2.4 EUT Configuration	13
3.2.5 Operating Condition of EUT	13
3.2.6 Radiated Emission Data	13
3.2.7 Test Photo and Setup	13
4. ESD Measurement.....	17
4.1 Test Equipments.....	17
4.2 Test Setup.....	17
4.2.1 Block Diagram of Connections between EUT and simulators.....	17
4.2.2 Test Setup of EUT.....	17
4.3 Severity Levels.....	18
4.4 EUT Operating Condition.....	18
4.5 Test Procedure.....	18
4.6 Test Method.....	18
4.7 Test Result.....	19

TABLE OF CONTENTS

Description	Page
5. Radiated Susceptibility Measurement	20
5.1 Test Equipment.....	20
5.2 Block Diagram of Test Setup.....	20
5.3 Severity Levels.....	21
5.4 EUT Operating Condition.....	21
5.5 Test procedure.....	21
5.6 Test Method.....	21
5.7 Test Result.....	22
6. Electrical Fast Transient/Burst Measurement	23
6.1 Test Equipment	23
6.2 Block Diagram of Test Setup.....	23
6.3 Severity Levels	23
6.4 EUT Operating Condition.....	24
6.5 Test procedure	24
6.6 Test Method.....	24
6.7 Test Result.....	25
7. Harmonic Current Requirements	26
8. Voltage Fluctuation and Filcker Test	29
9. Surge Immunity Test	30
10. Conducted Immunity Test	31
11. Voltage Dip, interruptions Immunity Test	32
12. Photographs	33
13. EMI Reduction method during compliance Testing	36
Appendix A Circuit diagram, block diagram, User Manual	
Appendix B Doc	

1. Test Report Certification

Applicant : ZIPPY TECHNOLOGY CORP.

Manufacturer : ZIPPY TECHNOLOGY CORP.

EUT Description : Switching Power Supply

(A) FCC ID : N/A

(B) Model No. : **MQ1G-1060V-12**

(C) Serial No. : N/A

(D) Power Supply : 115Vac/60Hz,230Vac/50Hz

MEASUREMENT PROCEDURE USED :

EN 55024 RULES

EN 55022 RULES

THE DEVICE DESCRIBED ABOVE WAS TESTED BY ZIPPY SHIN JIUH CORP. TO DETERMINE THE SEVERITY LEVELS THE DEVICE CAN ENDURE AND ITS PERFORMANCE CRITERION.

THE MEASUREMENT RESULTS ARE CONTAINED IN THIS TEST REPORT AND ZIPPY SHIN JIUH CORP. IS ASSUMED FULL RESPONSIBILITY FOR THE ACCURACY AND COMPLETENESS OF THESE MEASUREMENT.

ALSO, THIS REPORT SHOWS THAT THE EUT TO BE TECHNICALLY COMPLIANT WITH THE EN STANDARD.

Test Dated : OCT,13,2010

Test Engineer : Karen

Approve & Authorized Signer : Melvin Lim

2. General Information

2.1 Production Description

Description : Switching Power Supply

Model Number : **MQ1G-1060V-12**

Applicant : ZIPPY TECHNOLOGY CORP.

Address : 10F, No.50, MIN CHYUAN RD. SHIN-TIEN,
TAIPEI HSIEN TAIWAN, R.O.C

FCC ID : N/A

Data Cable : N/A

PowerCord : Non-Shielded, detachable, 1.5m

2.2 Tested System Details

The FCC IDs for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

2.2.1 Resistor Load

Model Number	: ELECTRONIC LOAD
Serial Number	: N/A
FCC ID	: N/A
Manufacturer	: ZIPPY
Power	: 60W

2.3 Test Methodology

EMI Test:

Both conducted and radiated testing were performed according to the procedures in EN 55022
Radiated testing was performed at an antenna to EUT distance of 10 meters.

EMS Test:

Performed according to procedures in EN 61000 series regulations.

2.4 Test Facility

ZIPPY TECHNOLOGY CORP.
10F, No. 50, MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C

3. Electronic-Magnetic Interference Test


3.1 Conducted Power Line Test

3.1.1 TEST Equipment's

The following test equipment's are used during the conducted power line tests:

Item	Instrument	Manufacture	Type No:	Last Calibration
1	TEST RECEIVER	ROHDE & SCHWARZ	ESHS10	Mar.,2010
2	LISN	ROHDE & SCHWARZ	ENV4200	Jan.,2010
3	COMPUTER	Acer	Power8000	N/A
4	PRINTER	EPSON	5700L	N/A
5	SHIELDED ROOM 4.0M*3.0M*3M			N/A

3.1.2 Block Diagram of Test Setup

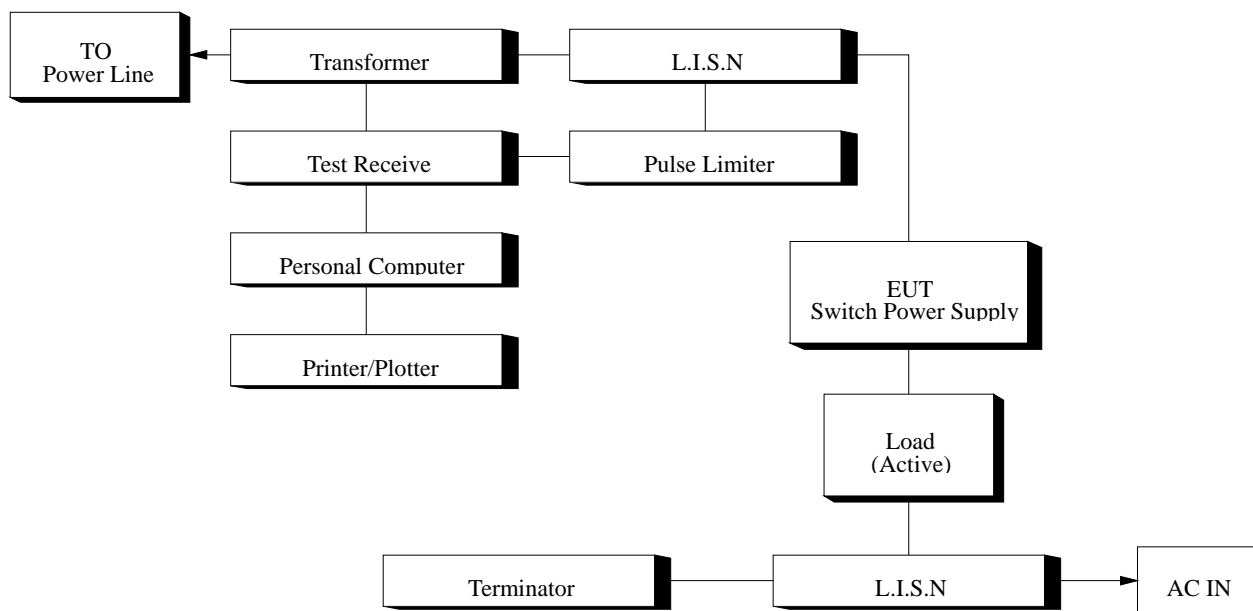

3.1.3 Conducted Powerline Emission Limit

Maximum RF Line Voltage dB(uV)		
Frequency	Class B	
MHz	QUASI-PEAK	AVERAGE
0.15 - 0.50	66-56	66-56
0.50 - 5.0	56	56
5.0 - 30	60	60

Remarks : In the Above Table, the tighter limit applies at the band edges.

3.1.4 EUT Configuration on Measurement

The equipment's which is listed 3.2 are installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.1.5 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below :

3.1.5.1 Setup the EUT and simulators as shown on 3.2.

3.1.5.2 Turn on the power of all equipment's.

3.1.6 Conducted Emission Data

The measurement range of conducted emission which is from 0.15 MHz to 30 MHz was investigated. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

DATE OF TEST	: <u>OCT,13,2010</u>	TEMPERATURE	: <u>26℃</u>
EUT	: <u>SWITCH POWER SUPPLY</u>	HUMIDITY	: <u>65%</u>
TEST MODE	: MQ1G-1060V-12	DISPLAY PATTERN	: N/A

[illegible]

Remark : All readings are Quasi-Peak values.

ZIPPY EMC LAB

conduction test


EUT: MQ1G-1060V-12 SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: EN 55022-- Class B
Comment: Load Condition (5)
L220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

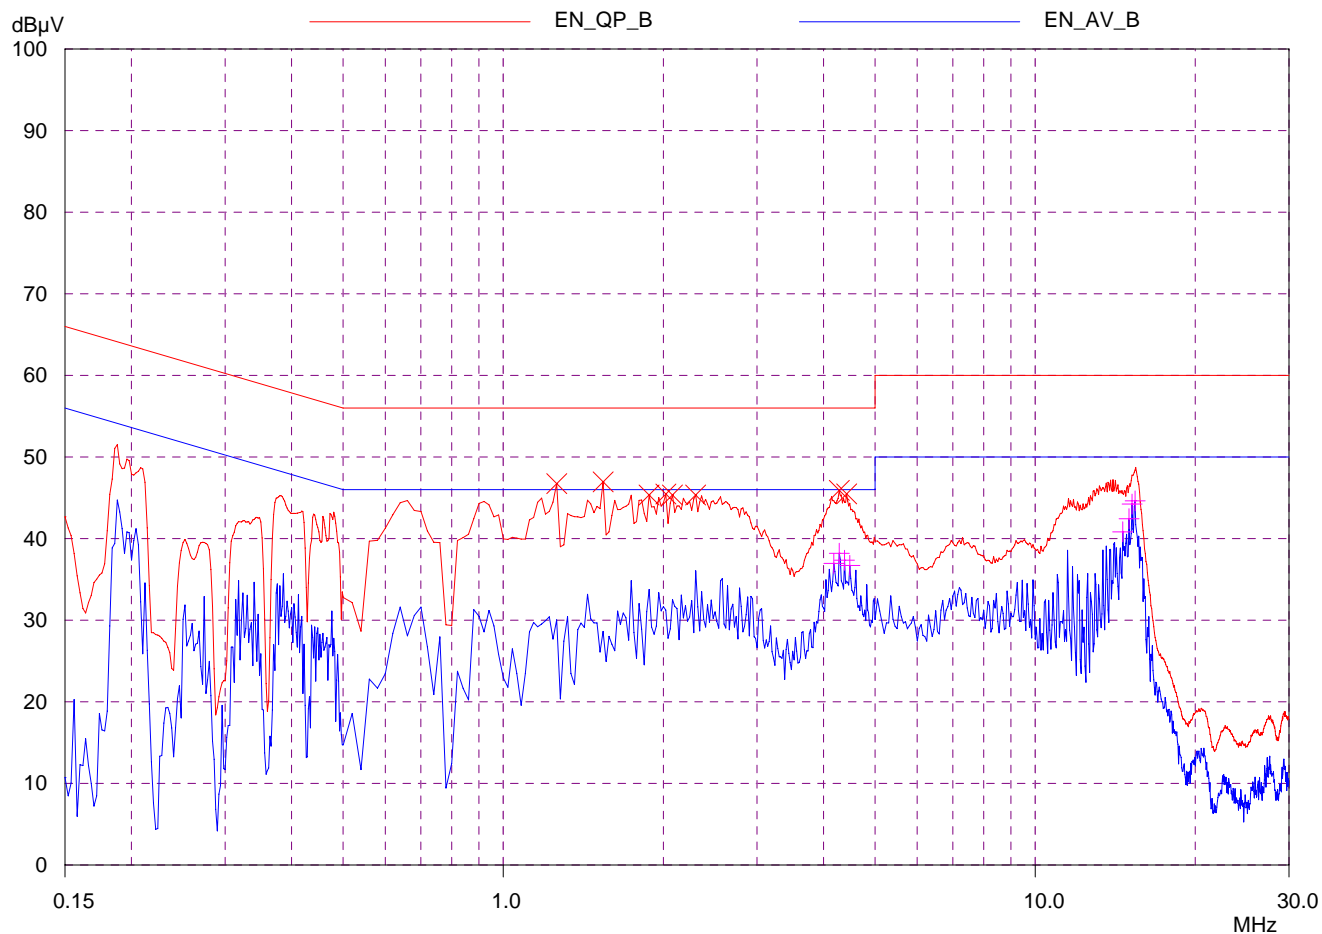

ZIPPY EMC LAB

conduction test

EUT: MQ1G-1060V-12 SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: EN 55022-- Class B
 Comment: Load Condition (5)
 L220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
1.26	46.74	56.00	9.26	N	gnd
1.54	46.95	56.00	9.05	N	gnd
1.88	45.35	56.00	10.65	N	gnd
2.02	45.45	56.00	10.55	N	gnd
2.08	45.34	56.00	10.66	N	gnd
2.3	45.34	56.00	10.66	N	gnd
4.28	45.91	56.00	10.09	N	gnd
4.42	45.47	56.00	10.53	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
4.18	36.96	46.00	9.04	N	gnd
4.28	38.20	46.00	7.80	N	gnd
4.38	37.36	46.00	8.64	N	gnd
4.48	36.71	46.00	9.29	N	gnd
14.6	40.84	50.00	9.16	N	gnd
15.0	42.43	50.00	7.57	N	gnd
15.2	44.23	50.00	5.77	N	gnd
15.4	44.62	50.00	5.38	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test


EUT: MQ1G-1060V-12 SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator:
Test Spec: EN 55022-- Class B
Comment: Load Condition (5)
N220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

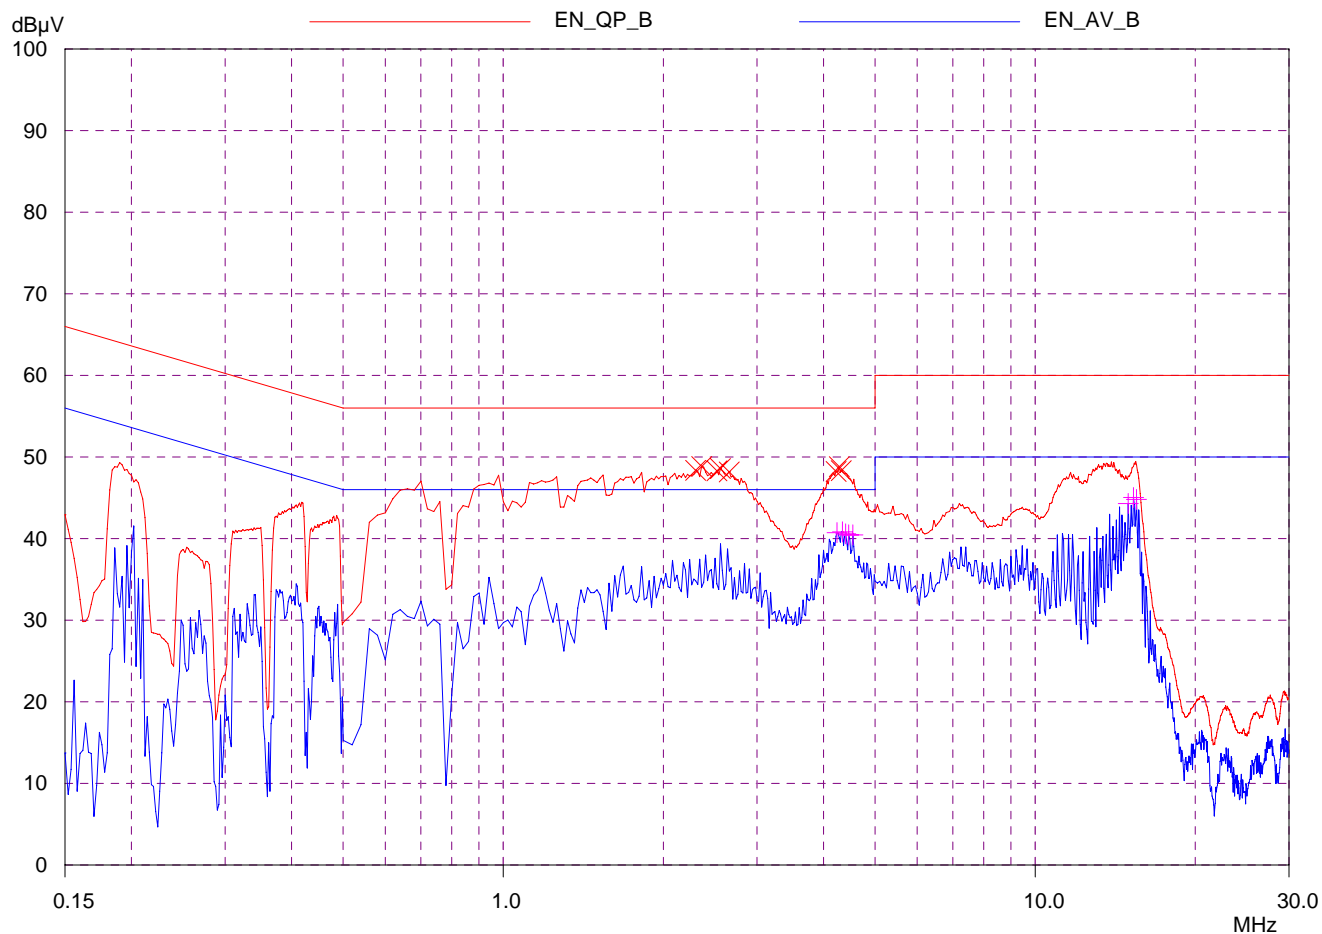

ZIPPY EMC LAB

conduction test

EUT: MQ1G-1060V-12 SPS
 Manuf: ZIPPY TECH CO..LTD
 Op Cond: FULL LOAD
 Operator:
 Test Spec: EN 55022-- Class B
 Comment: Load Condition (5)
 N220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement: Detectors: X QP / + AV
 Meas Time: see scan settings
 Peaks: 8
 Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
2.3	48.36	56.00	7.64	N	gnd
2.36	48.84	56.00	7.16	N	gnd
2.52	48.30	56.00	7.70	N	gnd
2.56	48.58	56.00	7.42	N	gnd
2.66	48.17	56.00	7.83	N	gnd
4.22	48.23	56.00	7.77	N	gnd
4.28	48.80	56.00	7.20	N	gnd
4.32	48.32	56.00	7.68	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
4.24	40.73	46.00	5.27	N	gnd
4.34	40.83	46.00	5.17	N	gnd
4.4	40.59	46.00	5.41	N	gnd
4.46	40.46	46.00	5.54	N	gnd
4.54	40.46	46.00	5.54	N	gnd
14.95	44.29	50.00	5.71	N	gnd
15.3	45.04	50.00	4.96	N	gnd
15.5	44.80	50.00	5.20	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

3.2 Radiation Emission Test


3.2.1 Test Equipment

The following test equipment's are used during the radiated emission test :

Instrument	Manufacture	Type No:	Last Calibration
Spectrum Analyzer	H.P	8594A	May.,2010
Test Receiver	IFR System	A-7550	Jun.,2010
Preamplifier	H.P	8447D	May.,2010
Biconical Ant.	Emco	3110	Jun.,2010
Log-Periodic Ant.	Emco	3146	Jun.,2010
Dipole Antenna	Emco	3121C	May.,2010

3.2.2 Test Setup

3.2.2.1 Block Diagram of Connection between EUT and simulators

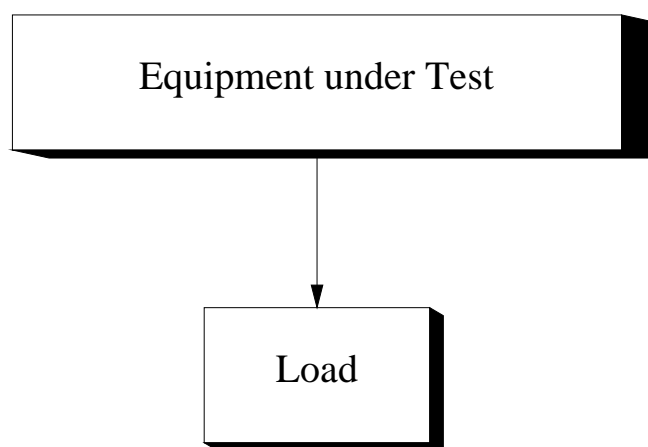


EUT: SWITCHING POWER SUPPLY

3.2.2.2 Open Field Test Site - description

The open field test site (OFTS) is designed to provide an environment in which repeatable tests of radiated emissions can be carried out.

It consists of a flat elliptical area as shown in the diagram below.

The equipment under test and the antenna are placed at the foci of the ellipse.

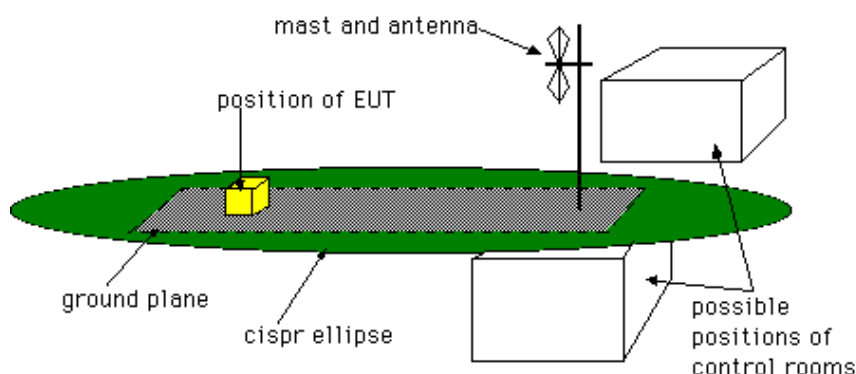

The antenna height should be remotely adjustable from 1m to 4m. Measuring instrumentation should be outside the ellipse at the position shown or in a room under the ground plane.

The whole or part of the site may be enclosed in an RF transparent building.

For precompliance testing a 3m test site with a fixed height antenna (at 1.5-2m height) and no metallic ground plane may be used. This may be a clear area on a car park or a grass area but should be away from large metallic structures.

3.2.3 Radiated Emission Limit

Class B Limits

Frequency	Distance	Field Strength
MHz	Meter	DB(uV/M)
30-230	3	40
230-1000	3	47

Remarks :

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.2.4 EUT Configuration

The equipment's which is listed 4.2.1 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.2.5 Operation Condition of EUT

Same as Conducted Power Line Test which is listed in 3.1.5 .

3.2.6 Radiated Emission Data

The measurement range of radiated emission which is from 30 MHz to 1000 MHz was investigated. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

3.2.7 Test Photo and Setup



※During the radiated test, the power-supply has to test with chassis, which is not allowed to be operated stand-alone. (For user, final assembly has to comply with corresponding EMC-and safety-regulations.)

MODEL : MQ1G-1060V-12

REPORT NO. : 10101301

Radiated Emission Data

DATE OF TEST : OCT,13,2010

TEMPERATURE : 26°C

EUT : SWITCH POWER SUPPLY

HUMIDITY : 65%

TEST MODE : MQ1G-1060V-12

DISPLAY PATTERN : N/A


Frequency (MHz)	Emission Level	Limits dBuV/m	Remark
	Horizontal dBuV/m		
35.4	33.1	40.0	
64.4	25.2	40.0	
122.9	24.1	40.0	
341.0	20.6	47.0	
704.9	30.2	47.0	

Radiated Emission Data


DATE OF TEST : OCT,13,2010TEMPERATURE : 26°CEUT : SWITCH POWER SUPPLYHUMIDITY : 65%TEST MODE : MQ1G-1060V-12DISPLAY PATTERN : N/A

Frequency (MHz)	Emission Level	Limits dBuV/m	Remark
	Vertical dBuV/m		
33.7	31.5	40.0	
61.5	27.0	40.0	
121.3	22.9	40.0	
207.1	19.4	40.0	
332.2	21.4	47.0	
896.3	32.1	47.0	

Horizontal Curve

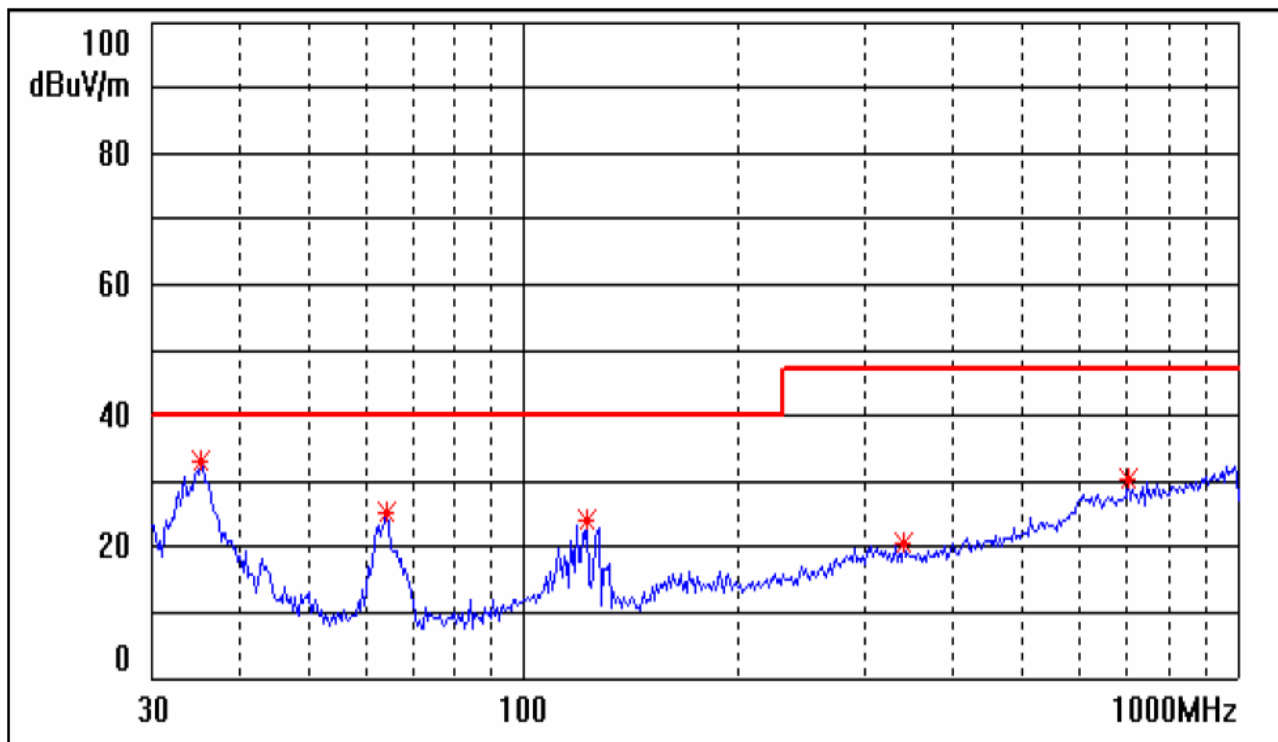

Vertical Curve

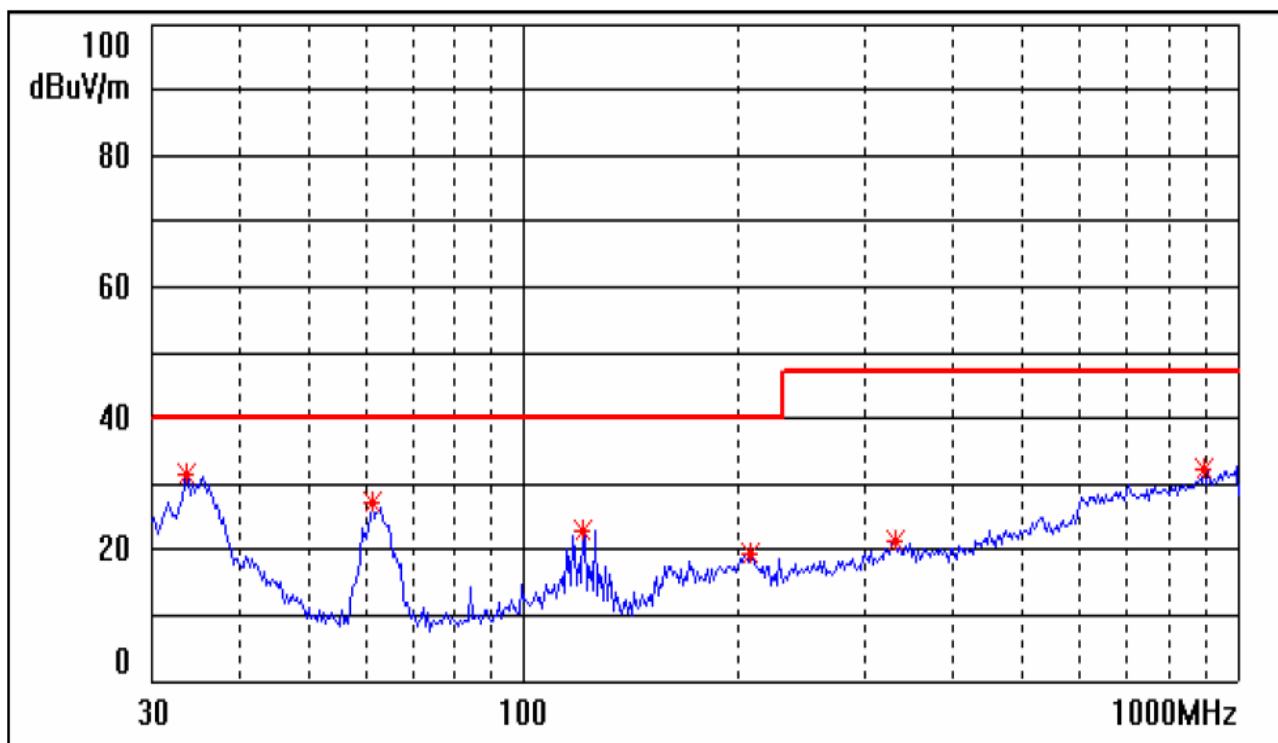

4. ESD Measurement


4.1 Test Equipment

The following test equipment's are used during the ESD test :


Instrument	Manufacture	Type No:	Last Calibration
ESD Simulator system	Keytek	MZ-15/EC	May.,2010
Electronic Load	D-RAM	Load-2000	N/A

4.2 Test Setup

4.2.1 Block Diagram of Connections between EUT and simulators

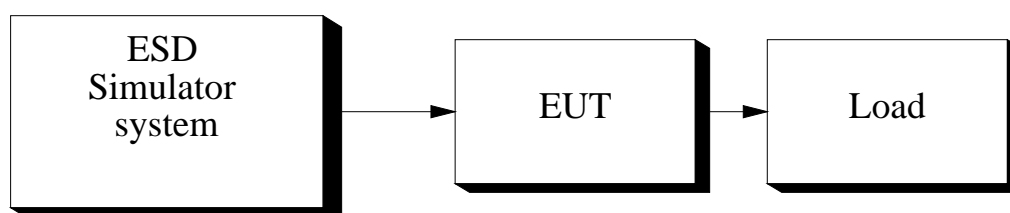

4.2.2 Test Setup of EUT

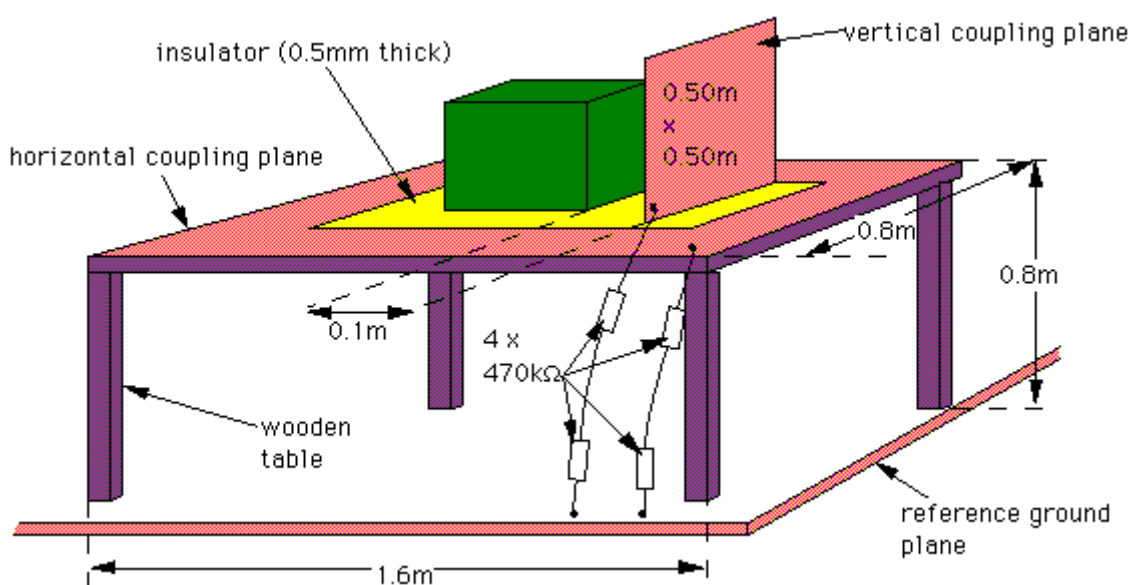

4.3 Severity Levels

LEVEL	TEST VOLTAGE CONTACT DISCHARGE	TEST VOLTAGE AIR DISCHARGE
1	2KV	2KV
2	4KV	4KV
3	6KV	6KV
4	8KV	8KV
X	SPECIAL	SPECIAL

4.4 EUT Operating Condition

1. Setup the EUT and Test Equipment as shown on 4.2
2. power on.

4.5 Test Procedure

Air Discharge:

This test was done above a non-conductive surfaces. The round discharge electrode about 30cm away will approach as fast as possible to touch test points of the EUT.

Discharge happens before the contact. This procedure is repeated ten times on one selected location.

4.6 Test Method

According to IEC 61000-4-2

4.7 Test Result

DATE OF TEST : OCT,13,2010 TEMPERATURE : 26°C

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : MQ1G-1060V-12 DISPLAY PATTERN : N/A

Item	Amount of discharge	Voltage	Results
Contact discharge	500	+2KV -2KV	Pass Pass
Contact discharge	500	+4KV -4KV	Pass Pass
Contact discharge	500	+6KV -6KV	Pass Pass
Air discharge	500	+2KV -2KV	Pass Pass
Air discharge	500	+4KV -4KV	Pass Pass
Air discharge	500	+6KV -6KV	Pass Pass
Air discharge	500	+8KV -8KV	Pass Pass

※Input Voltage : AC 230Vac/50Hz


5. Radiated Susceptibility Measurement

5.1 Test Equipment

The following test equipment's are used during the RS test :

Instrument	Manufacture	Type No:	Last Calibration
Signal generator	H.P	8657A	Dec.,2009
Power amplifier	A&R	100A100	Dec.,2009
Field strength meter	A&R	FM2000	Oct.,2010
Field strength sensor	A&R	EP2000	Oct.,2010
Power antenna	A&R	AT1080	Oct.,2010

5.2 Block Diagram of Test Setup

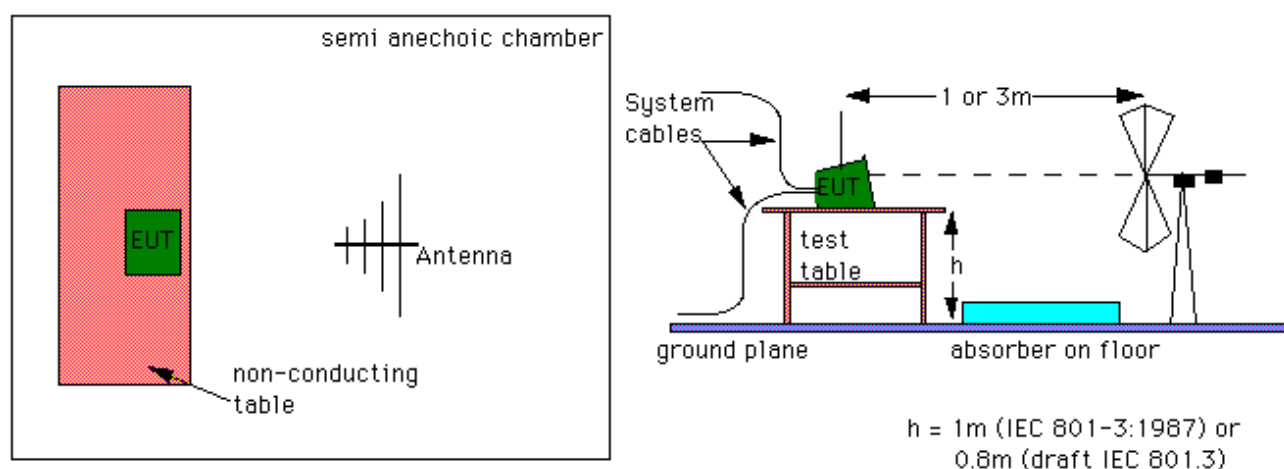

Antennas-layout

For the upper frequency range of 200 to 2500 MHz, antennas are the normal method of producing the required field strength. This is also carried out in an anechoic chamber or a screened room. If a screened room is used it must be damped. The anechoic chamber should be used for compliance testing, the screened room may be used for precompliance testing. The fields in the screened room will not be as uniform as those obtainable in an anechoic chamber and will also not be as repeatable. The EUT is placed on a non-conductive table, 0.8 m above the reference ground plane, which in many cases will be the floor of a screened room. According to the standards, the EUT should be oriented so that its most sensitive side is facing the antenna. In practice it can be difficult to decide beforehand which is the most sensitive side, and in most cases, a series of tests will be required with the EUT in several orientations.

5.3 Severity Levels

LEVEL	FIELD STRENGTH V/M
1	1
2	3
3	10
X	SPECIAL

5.4 EUT Operating Condition

Same as section 4.4.

5.5 Test Procedure

The EUT and load are placed on a table which is 0.8 meter above ground. The field sensor is also placed on the same table to monitor field strength from transmitting antenna.

EUT is set 1 meter away from the transmitting antenna which is mounted on an antenna each time.

The antenna is fixed 1 meter above ground. Both horizontal and vertical polarization of the antenna are set on measurement. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows :

Condition of Test	Remarks
1. Field Strength	3 V/M Level 2
2. Radiated Signal	80% Amplitude Modulated with a 1KHz Tone
3. Scanning Frequency	80 MHz-2.5 GHz
4. Sweep Time of Radiated	0.0015 Decade/s

5.6 Test Method

According to IEC 61000-4-3

5.7 Test Result

DATE OF TEST : OCT,13,2010 TEMPERATURE : 26°CEUT : SWITCH POWER SUPPLY HUMIDITY : 65%TEST MODE : MQ1G-1060V-12 DISPLAY PATTERN : N/A

Frequency Range (MHz)	Position (Angle)	Polarity (HorV)	Field Strength (V/M)	Results
80-2500	0° (Front)	H	3	Pass
80-2500	90° (Right)	H	3	Pass
80-2500	180° (Back)	H	3	Pass
80-2500	270° (Left)	H	3	Pass
80-2500	0° (Front)	V	3	Pass
80-2500	90° (Right)	V	3	Pass
80-2500	180° (Back)	V	3	Pass
80-2500	270° (Left)	V	3	Pass

Test Result : Criteria A


6. Electrical Fast Transient / Burst Measurement

6.1 Test Equipment

The following test equipment's are used during the EFT tests :

Instrument	Manufacturer	Type No.	Last Calibration
Fast Transient / Burst enerator	Keytek	EMCpro	May.,2010

6.2 Block Diagram of Test Setup

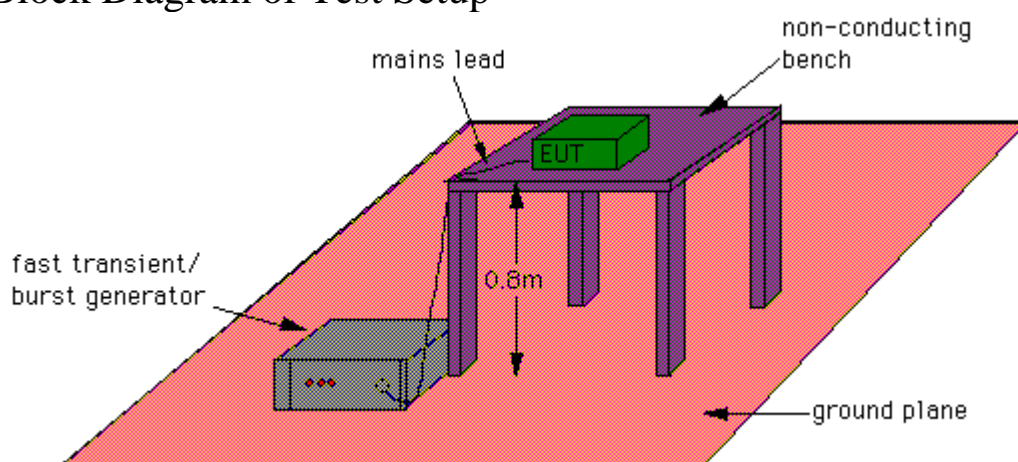

6.3 Severity Levels

Open Circuit Output Test Voltage +/- 10%	
Level	On power supply lines
1	0.5KV
2	1KV
3	2KV
4	4KV
X	SPECIAL

6.4 EUT Operation Condition

Same as section 4.4.

6.5 Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m*1m min. And 0.65 mm thick min. And projected beyond the EUT by at least 0.1m on all sides.

The EUT is away from the walls of the test AC power line test is as follows:

For Ac power line test:

The EUT is connected to the power mains through a coupling device that directly couples the EFT interference signal.

Each of the Line and Neutral conductor is impressed with burst noise for 1 min.

6.6 Test Method

According to IEC 61000-4-4.

6.7 Test Result

DATE OF TEST : OCT,13,2010TEMPERATURE : 26°CEUT : SWITCH POWER SUPPLYHUMIDITY : 65%TEST MODE : MQ1G-1060V-12DISPLAY PATTERN : N/A

Inject Line	Voltage KV	Inject time (sec)	Inject Method	Result
L1	+/-1	60	Direct	Pass
L2	+/-1	60	Direct	Pass
PE	+/-1	60	Direct	Pass
L1-L2	+/-1	60	Direct	Pass
L1-PE	+/-1	60	Direct	Pass
L2-PE	+/-1	60	Direct	Pass
L1,L2-PE	+/-1	60	Direct	Pass

※Input Voltage : AC 230Vac/50Hz

7. Harmonic Current Test

DATE OF TEST : OCT,13,2010TEMPERATURE : 26°CEUT : SWITCH POWER SUPPLYHUMIDITY : 65%TEST MODE : MQ1G-1060V-12DISPLAY PATTERN : N/A

Item	Reading Leve A		Item	Reading Leve A	
	A	Limites		A	Limites
1	0.3187				
3	0.3031	2.3000			
5	0.2786	1.1400			
7	0.2444	0.7700			
9	0.2044	0.4000			
11	0.1624	0.3300			
13	0.1217	0.2100			
15	0.0865	0.1500			
17	0.0607	0.1324			
19	0.0471	0.1184			
21	0.0429	0.1071			
23	0.0415	0.0978			
25	0.0384	0.0900			
27	0.0328	0.0833			
29	0.0255	0.0776			
31	0.0185	0.0726			
33	0.0138	0.0682			
35	0.0125	0.0643			
37	0.0128	0.0608			
39	0.0125	0.0577			


※Note : This Class D Product is exempt Because its maximum watts did not meet required minimum

Chroma

ANALYZER 6630

Waveform M1

Note:

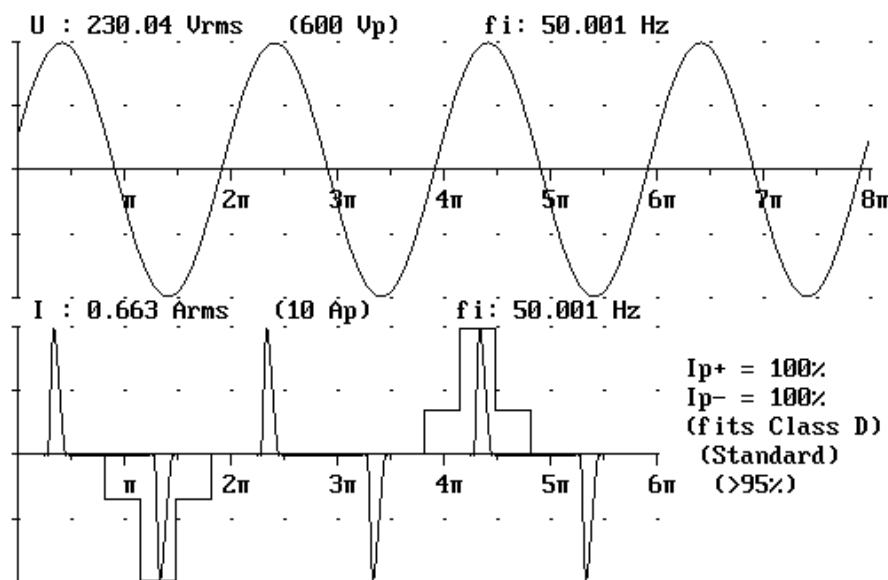Next
measureZoom
VoltageZoom
CurrentWrite to
diskData
cursor

Appl: EUROPE

(1611_00)


Chroma

ANALYZER 6630

Current Harmonics

Setup: CLASS_A
Live
Module: M1

Gen setting: 1(1) U : 230.07 V fu: 50.000 Hz
Analysed periods: 4 I : 0.6598 A P: 71.5 W
Limit: Class A (Standard) I1: 0.3187 A
Note:
THD=181.15 % (PF=0.471) PASSED

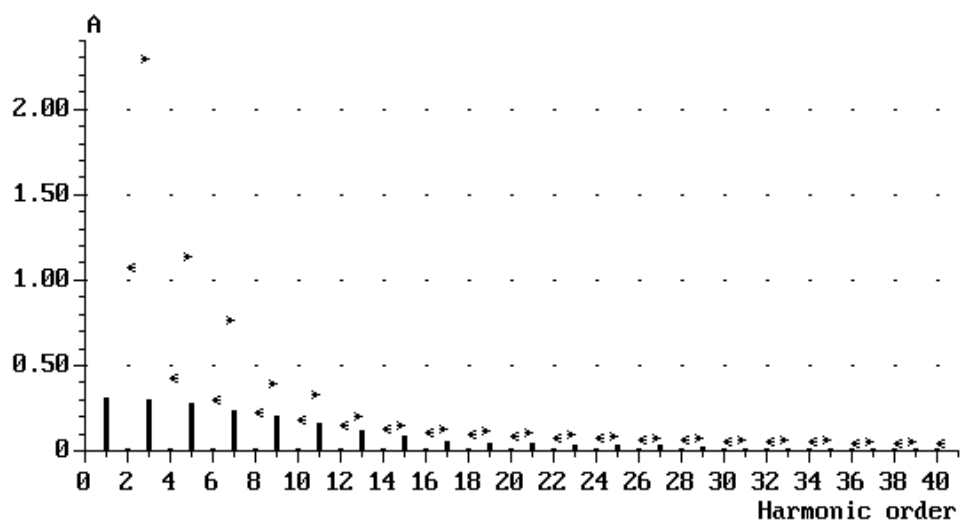Next
measureChange to
tableRelative
currentLog
scaleWrite to
disk

Appl: EUROPE

(1212_02)

Chroma

ANALYZER 6630

Current Harmonics

Setup: CLASS_A Gen setting: 1(1) U : 230.07 V fu: 50.000 Hz
 Live Analysed periods: 4 I : 0.6598 A P: 71.5 W
 Module: M1 Limit: Class A (Standard) I1: 0.3187 A
 Note:
 THD=181.15 % (PF=0.471) PASSED

No	A	Lim A	No	A	Lim A	No	A	Lim A
1	0.3187		15	0.0865	0.1500	29	0.0255	0.0776
2	0.0005	1.0000	16	0.0020	0.1150	30	0.0008	0.0613
3	0.3031	2.3000	17	0.0607	0.1324	31	0.0185	0.0726
4	0.0005	0.4300	18	0.0020	0.1022	32	0.0008	0.0575
5	0.2786	1.1400	19	0.0471	0.1184	33	0.0138	0.0682
6	0.0005	0.3000	20	0.0019	0.0920	34	0.0008	0.0541
7	0.2444	0.7700	21	0.0429	0.1071	35	0.0125	0.0643
8	0.0008	0.2300	22	0.0017	0.0836	36	0.0009	0.0511
9	0.2044	0.4000	23	0.0415	0.0978	37	0.0128	0.0608
10	0.0012	0.1840	24	0.0014	0.0767	38	0.0009	0.0484
11	0.1624	0.3300	25	0.0384	0.0900	39	0.0125	0.0577
12	0.0015	0.1533	26	0.0011	0.0708	40	0.0008	0.0460
13	0.1217	0.2100	27	0.0328	0.0833			
14	0.0018	0.1314	28	0.0009	0.0657			

Current range: 3 Ap

Next
measureChange to
bar graphRelative
currentWrite to
disk

Appl: EUROPE

(1212_03)

8. Voltage Fluctuation And Flicker Test

DATE OF TEST : OCT,13,2010 TEMPERATURE : 26°C

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : MQ1G-1060V-12 DISPLAY PATTERN : N/A

Item	Reading	Limit	Result
Pst	0.000	1.00	Pass
P1t	0.000	0.65	Pass
Dc (%)	0.000	3.00	Pass
Dmax (%)	0.000	4.00	Pass
Dt (%)	0.000	0.20	Pass

9. Surge Immunity Test

DATE OF TEST : OCT,13,2010TEMPERATURE : 26°CEUT : SWITCH POWER SUPPLYHUMIDITY : 65%TEST MODE : MQ1G-1060V-12DISPLAY PATTERN : N/A

Wavefor	Voltage	Output:LC	Phs Ref	Phs Ang	Tests	Delay	Result
12 Ohm	-2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	270 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec	Pass

10. Conducted Immunity Test

DATE OF TEST : OCT,13,2010 TEMPERATURE : 26°C

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : MQ1G-1060V-12 DISPLAY PATTERN : N/A

Frequency Range (MHz)	Polarity (HorV)	Field Strength (V/M)	Results
0.15-80	H	3	Pass

INJECTION TYPE : DIRECT CDN Type M3

TEST CONDITION : Step:1% Dwell Time : 3sec

Test result : Criteria A


11. Voltage Dip, Interruptions Immunity Test

DATE OF TEST : OCT,13,2010 TEMPERATURE : 26°CEUT : SWITCH POWER SUPPLY HUMIDITY : 65%TEST MODE : MQ1G-1060V-12 DISPLAY PATTERN : N/A

Test Voltage	Reduction %	Duration (Periods)	Performance		Results
			Required	Observation	
AC 115V	100	0.5	A	A	Pass
	100	1	B	B	Pass
	30	25	C	C	Pass
	100	250	C	C	Pass
AC 230V	100	0.5	A	A	Pass
	100	1	B	B	Pass
	30	25	C	A	Pass
	100	250	C	C	Pass



12. Photographs

- 1.Front view of Power Supply
- 2.Back view of Power Supply

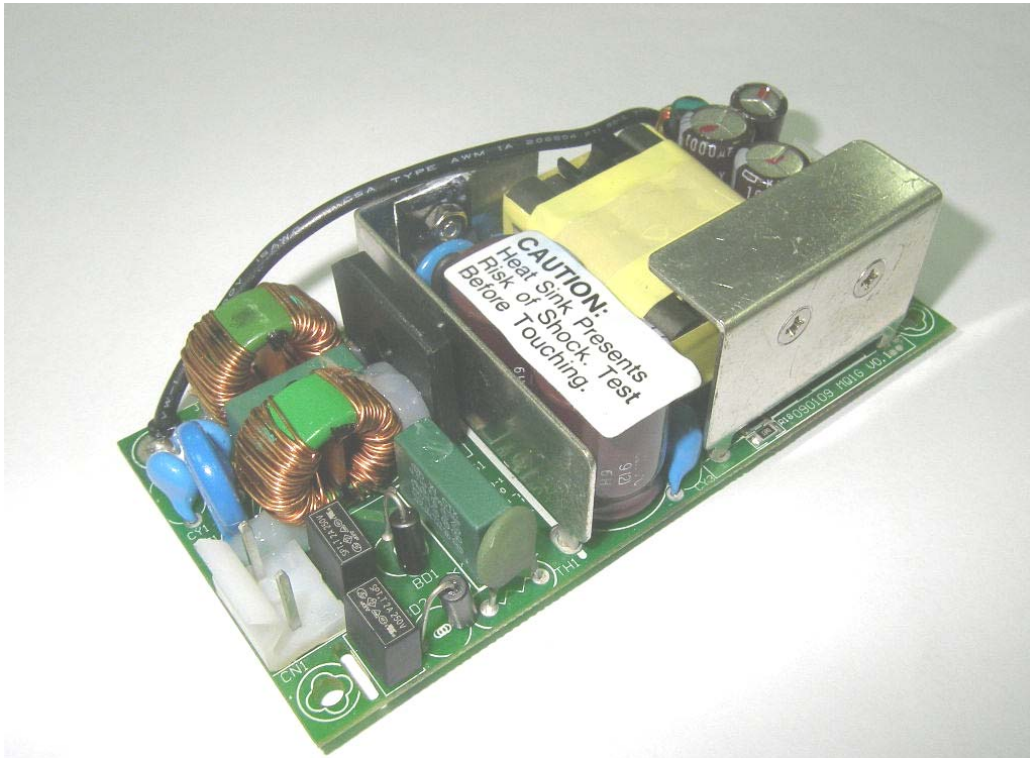

3.Component side of Mainboard

4.Solder side of Mainboard

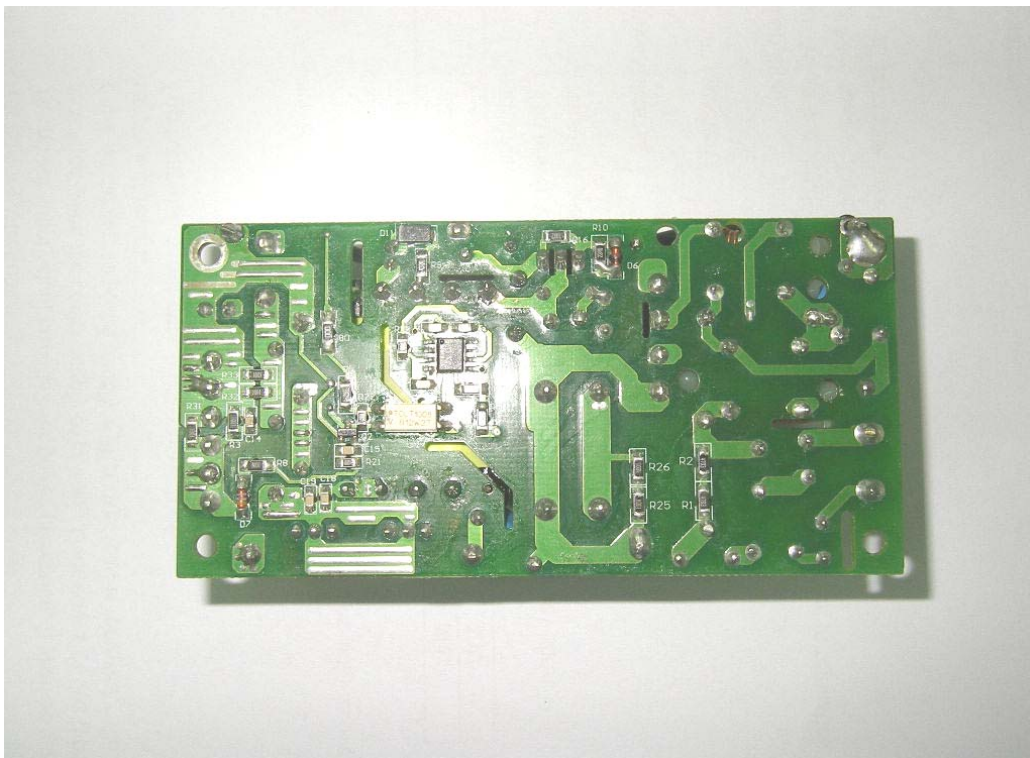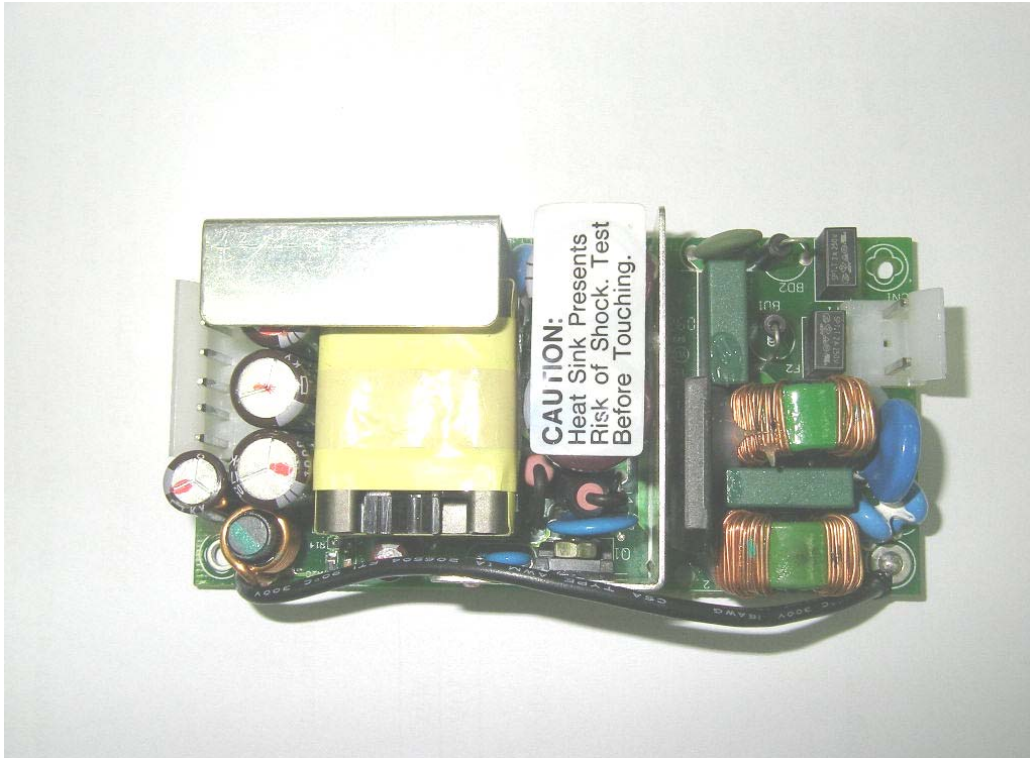

5. Test view



13. EMI Reduction Method During Compliance Testing

1.No modification was made during test.