




# ZIPPY TECH CO..LTD

## ZIPPY EMC LAB

MODEL NAME : M1K-2C00V TEST MODE : LINE-110V  
TEST SPEC. : FCC Part 15-CLASS A LOAD CONDITION : 99 3

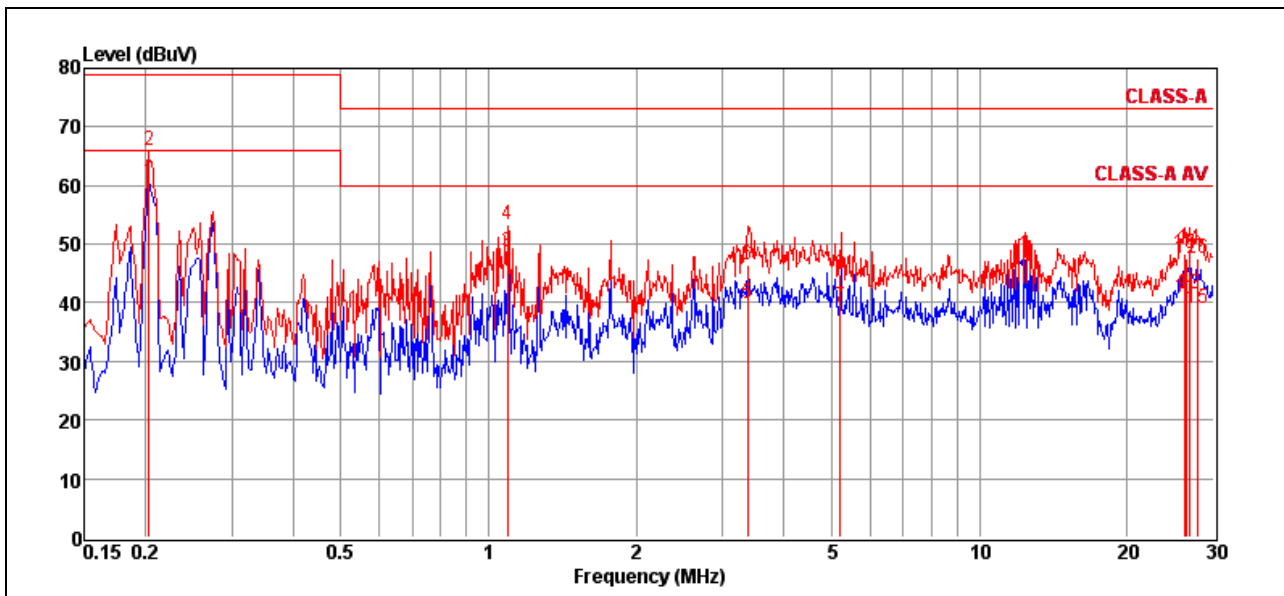

| Freq  | Reading | Reading | Factor | Result | Result | Limit | Limit | Margin | Margin |
|-------|---------|---------|--------|--------|--------|-------|-------|--------|--------|
|       | QP      | AV      |        | QP     | AV     | QP    | AV    | QP     | AV     |
| MHz   | dBuV    | dBuV    | dB     | dBuV   | dBuV   | dBuV  | dBuV  | dB     | dB     |
| 0.20  |         | 39.71   | 21.02  |        | 60.73  |       | 66.00 |        | 5.27   |
| 0.20  | 45.01   |         | 21.02  | 66.03  |        | 79.00 |       | 12.97  |        |
| 1.09  |         | 28.70   | 20.06  |        | 48.76  |       | 60.00 |        | 11.24  |
| 1.09  | 33.30   |         | 20.06  | 53.36  |        | 73.00 |       | 19.64  |        |
| 3.37  |         | 19.16   | 20.73  |        | 39.89  |       | 60.00 |        | 20.11  |
| 3.37  | 25.69   |         | 20.73  | 46.42  |        | 73.00 |       | 26.58  |        |
| 5.21  |         | 18.01   | 21.21  |        | 39.22  |       | 60.00 |        | 20.78  |
| 5.21  | 23.72   |         | 21.21  | 44.93  |        | 73.00 |       | 28.07  |        |
| 26.15 |         | 22.28   | 19.13  |        | 41.41  |       | 60.00 |        | 18.59  |
| 26.15 | 29.29   |         | 19.13  | 48.42  |        | 73.00 |       | 24.58  |        |
| 26.42 |         | 22.13   | 18.86  |        | 40.99  |       | 60.00 |        | 19.01  |
| 26.42 | 28.73   |         | 18.86  | 47.59  |        | 73.00 |       | 25.41  |        |
| 26.84 |         | 23.11   | 18.47  |        | 41.58  |       | 60.00 |        | 18.42  |
| 26.84 | 30.74   |         | 18.47  | 49.21  |        | 73.00 |       | 23.79  |        |
| 27.72 |         | 21.46   | 17.66  |        | 39.12  |       | 60.00 |        | 20.88  |
| 27.72 | 29.78   |         | 17.66  | 47.44  |        | 73.00 |       | 25.56  |        |




# ZIPPY TECH CO..LTD

## ZIPPY EMC LAB

MODEL NAME : M1K-2C00V TEST MODE : NEUTRAL-110V

TEST SPEC. : FCC Part 15-CLASS A LOAD CONDITION : 99 3

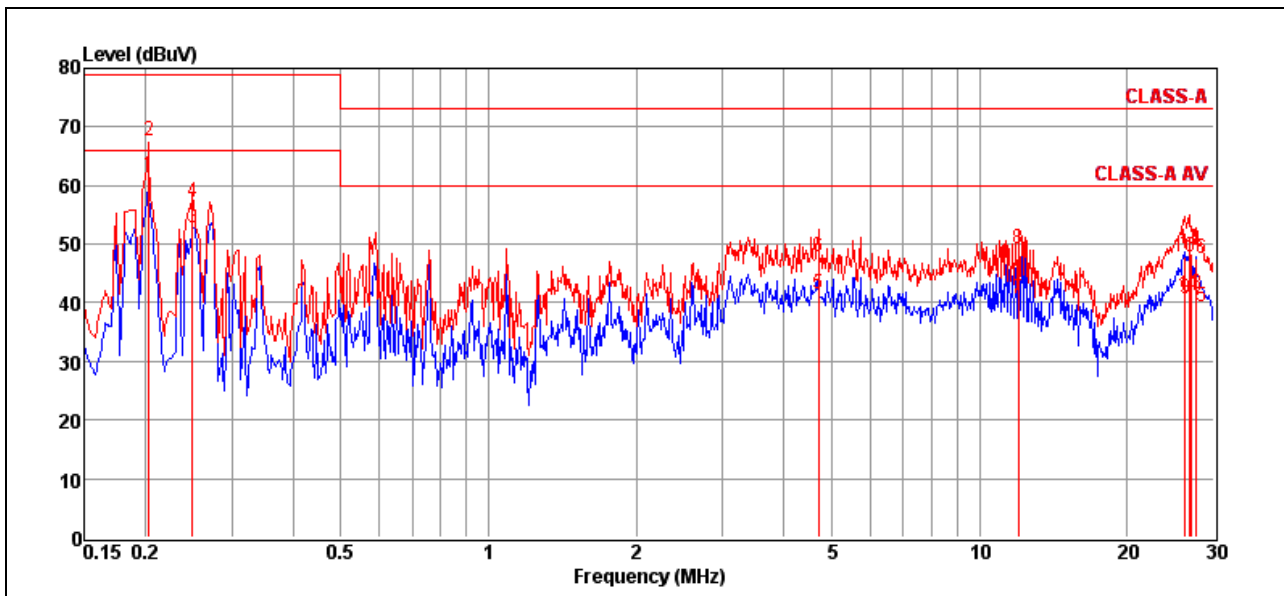

| Freq  | Reading | Reading | Factor | Result | Result | Limit | Limit | Margin | Margin |
|-------|---------|---------|--------|--------|--------|-------|-------|--------|--------|
|       | QP      | AV      |        | QP     | AV     | QP    | AV    | QP     | AV     |
| MHz   | dBuV    | dBuV    | dB     | dBuV   | dBuV   | dBuV  | dBuV  | dB     | dB     |
| 0.20  |         | 39.29   | 22.67  |        | 61.96  |       | 66.00 |        | 4.04   |
| 0.20  | 44.82   |         | 22.67  | 67.49  |        | 79.00 |       | 11.51  |        |
| 0.25  |         | 30.72   | 21.94  |        | 52.66  |       | 66.00 |        | 13.34  |
| 0.25  | 35.16   |         | 21.94  | 57.10  |        | 79.00 |       | 21.90  |        |
| 4.70  |         | 19.70   | 21.77  |        | 41.47  |       | 60.00 |        | 18.53  |
| 4.70  | 26.08   |         | 21.77  | 47.85  |        | 73.00 |       | 25.15  |        |
| 12.00 |         | 20.59   | 20.05  |        | 40.64  |       | 60.00 |        | 19.36  |
| 12.00 | 29.15   |         | 20.05  | 49.20  |        | 73.00 |       | 23.80  |        |
| 26.28 |         | 20.82   | 19.86  |        | 40.68  |       | 60.00 |        | 19.32  |
| 26.28 | 27.94   |         | 19.86  | 47.80  |        | 73.00 |       | 25.20  |        |
| 26.69 |         | 21.91   | 19.35  |        | 41.26  |       | 60.00 |        | 18.74  |
| 26.69 | 29.73   |         | 19.35  | 49.08  |        | 73.00 |       | 23.92  |        |
| 26.99 |         | 22.57   | 18.99  |        | 41.56  |       | 60.00 |        | 18.44  |
| 26.99 | 29.50   |         | 18.99  | 48.49  |        | 73.00 |       | 24.51  |        |
| 27.57 |         | 21.13   | 18.31  |        | 39.44  |       | 60.00 |        | 20.56  |
| 27.57 | 29.28   |         | 18.31  | 47.59  |        | 73.00 |       | 25.41  |        |